



配光特性

図番 20160515

カタログ番号	T125BW
オプション番号	3000K Ra95
使用ランプ	XTM19953013CCA
ランプ光束	1300.0 lm 1,000
最大光度	3268.5 cd
1/2ビーム角	
A断面	22.00 °
C断面	
B断面	



X-SERIES SPOTLIGHT 4.0	角度	光度
	0°	3269
	10°	1795
	20°	788
	30°	391
	40°	66
	50°	4
	60°	4
	70°	2
	80°	1
	90°	1
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

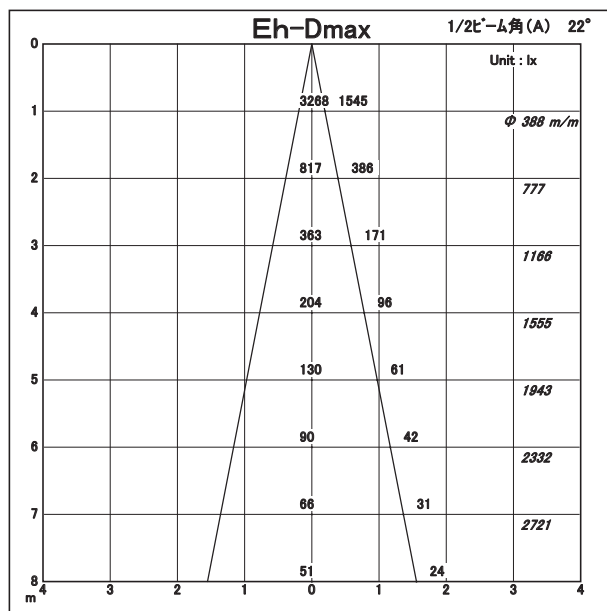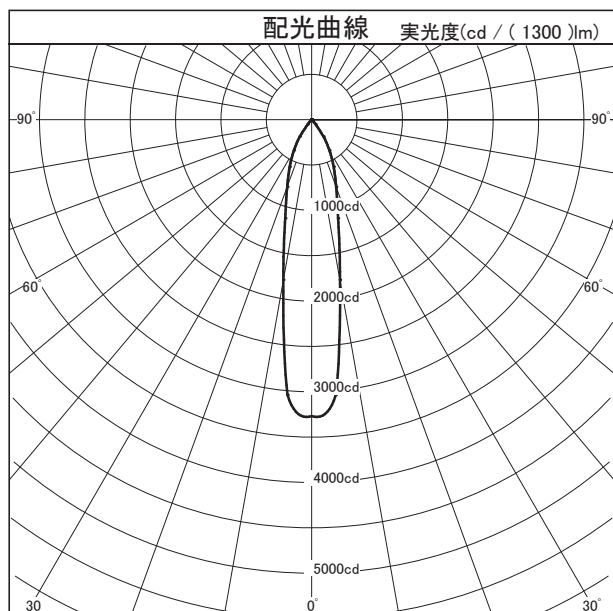

照 明 率 表													
平均照度=台数*照明率*保守率* 1300 (光束)/(間口*奥行)													
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.58	0.54	0.52	0.57	0.54	0.52	0.57	0.54	0.52	0.56	0.54	0.52
	0.70	0.65	0.61	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.62	0.60	0.58
	1.00	0.71	0.68	0.65	0.70	0.67	0.65	0.69	0.66	0.64	0.67	0.65	0.64
	1.25	0.74	0.71	0.69	0.73	0.70	0.68	0.71	0.69	0.67	0.70	0.68	0.66
	1.50	0.76	0.73	0.71	0.75	0.72	0.70	0.73	0.71	0.69	0.71	0.70	0.68
	2.00	0.79	0.77	0.75	0.77	0.75	0.73	0.75	0.73	0.72	0.73	0.72	0.71
	2.50	0.81	0.79	0.77	0.79	0.77	0.75	0.77	0.75	0.74	0.74	0.73	0.72
	3.00	0.83	0.80	0.79	0.80	0.78	0.77	0.77	0.76	0.75	0.75	0.74	0.73
	4.00	0.84	0.83	0.81	0.81	0.80	0.79	0.79	0.78	0.77	0.76	0.75	0.75
	5.00	0.86	0.84	0.83	0.82	0.81	0.80	0.79	0.79	0.78	0.77	0.76	0.75
数	7.00	0.87	0.86	0.85	0.83	0.83	0.82	0.80	0.80	0.79	0.77	0.77	0.76
	10.00	0.88	0.87	0.86	0.84	0.84	0.83	0.81	0.81	0.80	0.78	0.78	0.77