



配光特性

図番 20160515

カタログ番号	T125CW
オプション番号	3500K Ra95
使用ランプ	XTM19953513CCA
ランプ光束	1300.0 lm 1,000
最大光度	3268.5 cd
1/2ビーム角	
A断面	22.00 °
C断面	
B断面	



X-SERIES SPOTLIGHT 4.0		角度	光度
	断面	0°	3269
		10°	1795
		20°	788
		30°	391
		40°	66
		50°	4
		60°	4
		70°	2
		80°	1
		90°	1
		100°	0
		110°	0
		120°	0
		130°	0
		140°	0
		150°	0
		160°	0
		170°	0
		180°	0

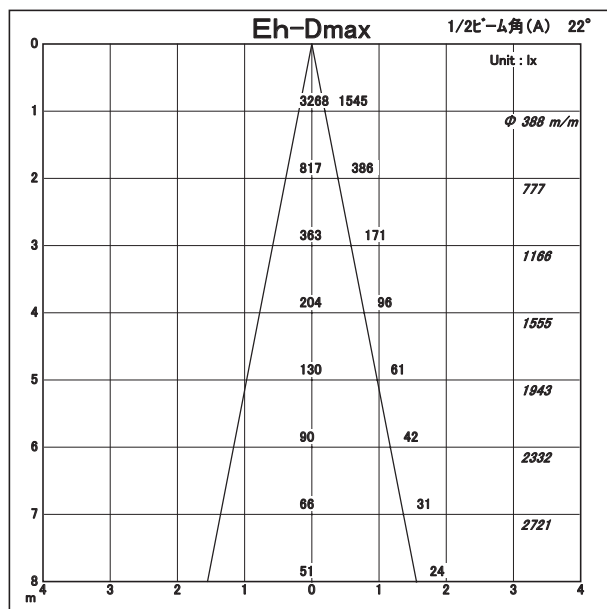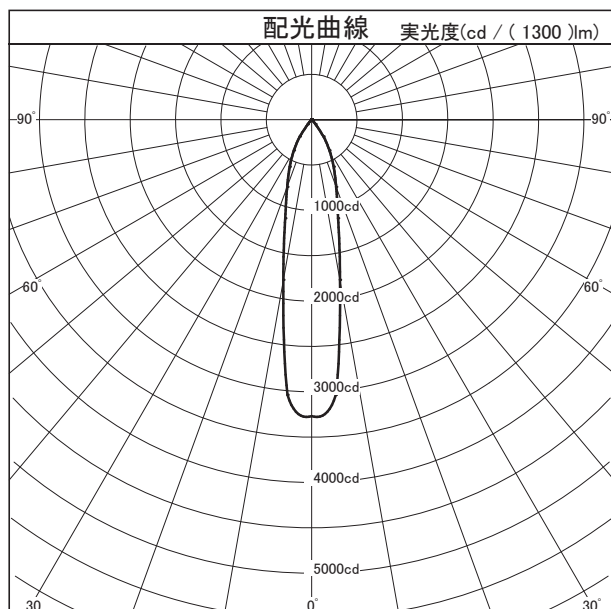

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1300 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.58	0.54	0.52	0.57	0.54	0.52	0.57	0.54	0.52	0.56	0.54	0.52	0.51
	0.70	0.65	0.61	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.62	0.60	0.58	0.57
	1.00	0.71	0.68	0.65	0.70	0.67	0.65	0.69	0.66	0.64	0.67	0.65	0.64	0.62
	1.25	0.74	0.71	0.69	0.73	0.70	0.68	0.71	0.69	0.67	0.70	0.68	0.66	0.65
	1.50	0.76	0.73	0.71	0.75	0.72	0.70	0.73	0.71	0.69	0.71	0.70	0.68	0.67
指	2.00	0.79	0.77	0.75	0.77	0.75	0.73	0.75	0.73	0.72	0.73	0.72	0.71	0.69
	2.50	0.81	0.79	0.77	0.79	0.77	0.75	0.77	0.75	0.74	0.74	0.73	0.72	0.70
	3.00	0.83	0.80	0.79	0.80	0.78	0.77	0.77	0.76	0.75	0.75	0.74	0.73	0.71
	4.00	0.84	0.83	0.81	0.81	0.80	0.79	0.79	0.78	0.77	0.76	0.75	0.75	0.72
	5.00	0.86	0.84	0.83	0.82	0.81	0.80	0.79	0.79	0.78	0.77	0.76	0.75	0.73
数	7.00	0.87	0.86	0.85	0.83	0.83	0.82	0.80	0.80	0.79	0.77	0.77	0.76	0.74
	10.00	0.88	0.87	0.86	0.84	0.84	0.83	0.81	0.81	0.80	0.78	0.78	0.77	0.75