



配光特性

図番 20160515

カタログ番号	T126CW
オプション番号	3500K Ra95
使用ランプ	XTM19953513CCA
ランプ光束	1300.0 lm 1.000
最大光度	1592.9 cd
1/2ビーム角	
A断面	48.00 °
C断面	
B断面	



X-SERIES SPOTLIGHT 4.0		角度	光度
	断面	0°	1593
		10°	1412
		20°	989
		30°	496
		40°	61
		50°	4
		60°	3
		70°	2
		80°	1
		90°	1
		100°	0
		110°	0
		120°	0
		130°	0
		140°	0
		150°	0
		160°	0
		170°	0
		180°	0

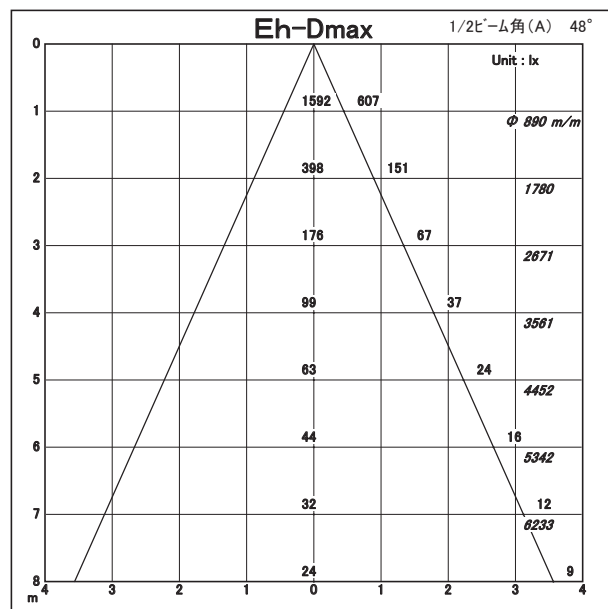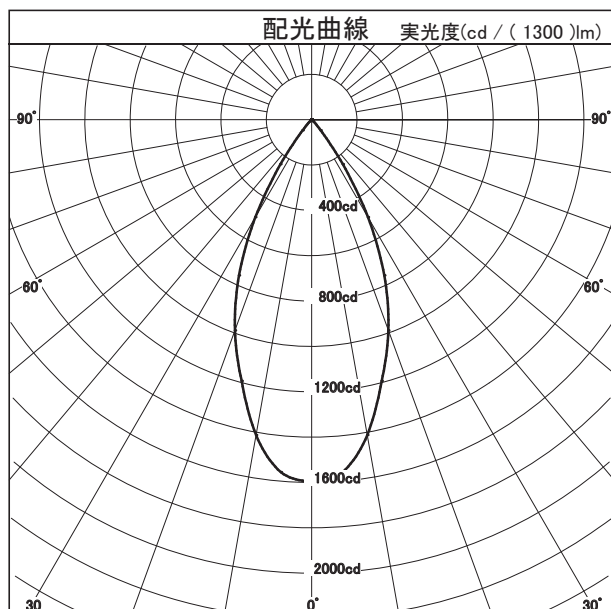

照 明 率 表		平均照度=台数*照明率*保守率* 1300 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室	0.50	0.54	0.50	0.47	0.53	0.50	0.47	0.53	0.49	0.47	0.52	0.49	0.47
	0.70	0.62	0.58	0.55	0.61	0.58	0.55	0.60	0.57	0.55	0.59	0.57	0.55
	1.00	0.69	0.65	0.63	0.68	0.65	0.62	0.67	0.64	0.62	0.65	0.63	0.61
	1.25	0.73	0.69	0.67	0.71	0.68	0.66	0.70	0.67	0.65	0.68	0.66	0.64
	1.50	0.75	0.72	0.69	0.73	0.71	0.68	0.72	0.69	0.67	0.70	0.68	0.67
	2.00	0.78	0.76	0.73	0.76	0.74	0.72	0.74	0.72	0.71	0.72	0.71	0.69
	2.50	0.81	0.78	0.76	0.78	0.76	0.74	0.76	0.74	0.73	0.74	0.72	0.71
	3.00	0.82	0.80	0.78	0.79	0.77	0.76	0.77	0.75	0.74	0.74	0.73	0.72
	4.00	0.84	0.82	0.80	0.81	0.80	0.78	0.78	0.77	0.76	0.76	0.75	0.74
	5.00	0.85	0.84	0.82	0.82	0.81	0.80	0.79	0.78	0.77	0.76	0.76	0.75
数	7.00	0.87	0.85	0.84	0.83	0.82	0.81	0.80	0.79	0.79	0.77	0.77	0.76
	10.00	0.88	0.87	0.86	0.84	0.83	0.83	0.81	0.80	0.80	0.78	0.77	0.77