





配光特性

図番 MR180182

カタログ番号	CAT.NO
使用ランプ	XTM09V93013
ランプ光束	1300.0 lm 1.000
器具効率	58.4 %
下方効率	58.3 %
上方効率	0.1 %
最大取付間隔	
A断面	
C断面	
B断面	



X-SERIES SPOTLIGHT 1.0	角度	光度
	0°	1688
	10°	1396
	20°	665
	30°	273
	40°	110
	50°	63
	60°	44
	70°	29
	80°	13
	90°	3
	100°	1
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

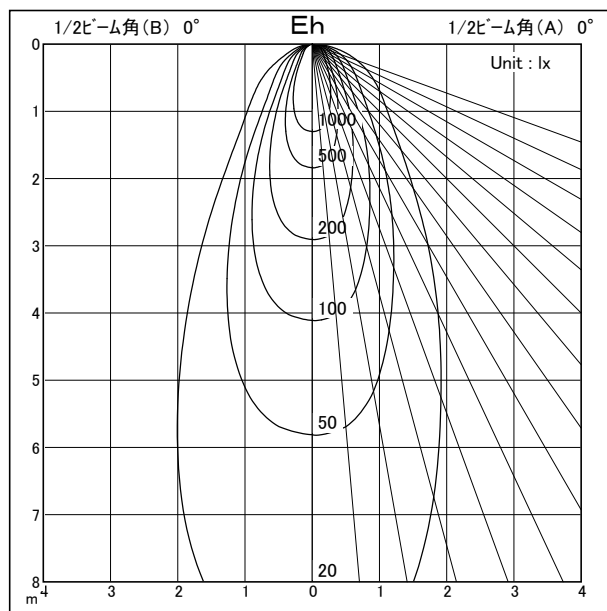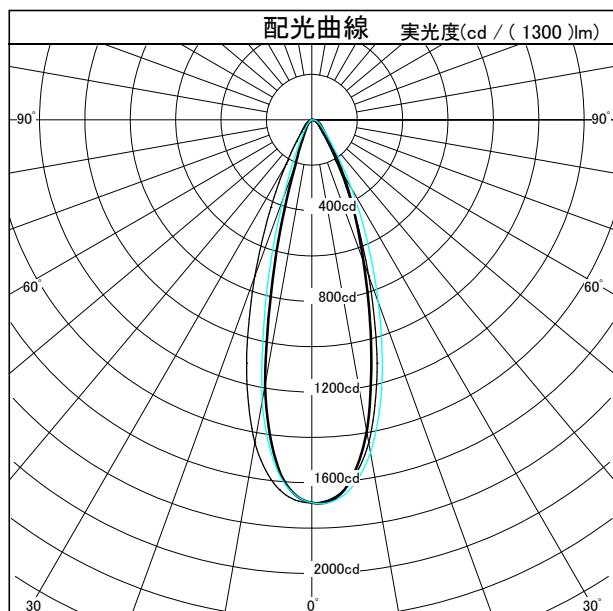

壁面照度分布 単灯							連灯						
(m)	0.50	1.00	1.50	2.00	2.50	3.00	(m)	0.50	1.00	1.50	2.00	2.50	3.00
0.50	63	41	13	4	2	1	0.50	94	93	94			
1.00	153	93	18	5	2	1	1.00	194	200	194			
1.50	189	129	29	6	2	1	1.50	255	273	255			
2.00	140	107	35	8	3	1	2.00	218	233	218			
2.50	86	70	31	9	3	1	2.50	156	163	156			
3.00	52	44	24	9	3	1	3.00	109	110	109			
3.50	33	28	17	8	3	1	3.50	76	76	76			
壁面からの距離 : 1.0m 器具間隔 : 1.0m 保守率 : 1.0							単位 : lx (m)						

TL LABORATORY INC.