



配光特性

図番 MR140400

カタログ番号	T500CB
オプション番号	3500K Ra80
使用ランプ	LXR8-SW35
ランプ光束	1148.0 lm 1.000
最大光度	5522.1 cd
1/2ビーム角	
A断面	20.60 °
C断面	
B断面	



G.E.M. 60SPOT	角度	光度
	0°	5522
	10°	2925
	20°	446
	30°	99
	40°	20
	50°	5
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

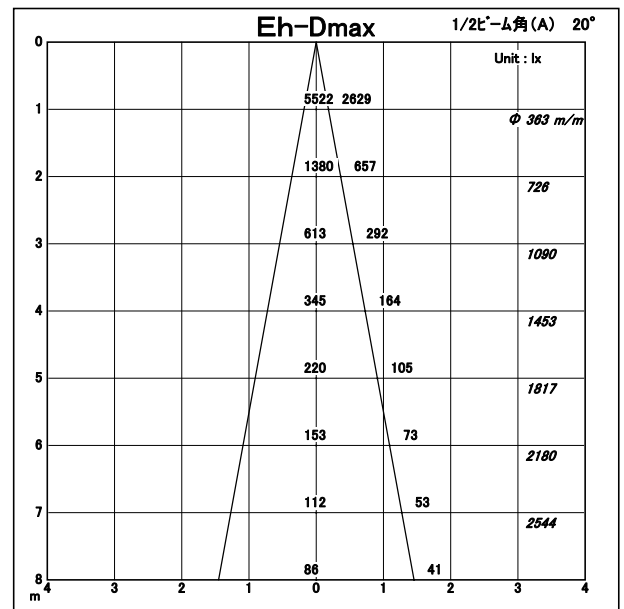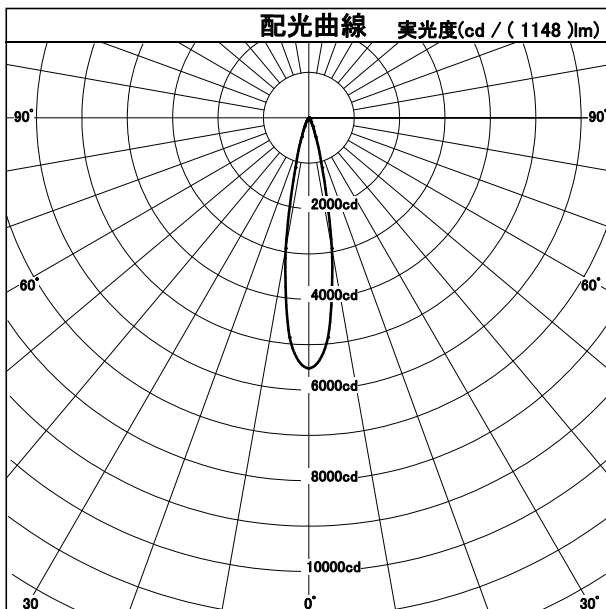

照 明 率 表		平均照度=台数*照明率*保守率* 1148 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		80											
壁面反射率(%)		50											
室 指 数	0.50	0.71	0.68	0.67	0.70	0.68	0.66	0.70	0.68	0.66	0.69	0.67	0.66
	0.70	0.75	0.72	0.70	0.74	0.72	0.70	0.73	0.71	0.70	0.73	0.71	0.69
	1.00	0.79	0.76	0.74	0.77	0.75	0.74	0.76	0.75	0.73	0.75	0.74	0.71
	1.25	0.81	0.78	0.76	0.79	0.77	0.76	0.78	0.76	0.75	0.76	0.75	0.73
	1.50	0.82	0.80	0.78	0.80	0.79	0.77	0.79	0.77	0.76	0.77	0.76	0.74
	2.00	0.84	0.82	0.81	0.82	0.80	0.79	0.80	0.79	0.78	0.78	0.77	0.75
	2.50	0.86	0.84	0.82	0.83	0.82	0.80	0.81	0.80	0.79	0.79	0.78	0.75
	3.00	0.87	0.85	0.84	0.84	0.83	0.81	0.82	0.80	0.80	0.79	0.78	0.76
	4.00	0.88	0.87	0.85	0.85	0.84	0.83	0.82	0.81	0.81	0.80	0.79	0.76
	5.00	0.89	0.88	0.87	0.86	0.85	0.84	0.83	0.82	0.81	0.80	0.80	0.77
数	7.00	0.90	0.89	0.88	0.87	0.86	0.85	0.83	0.83	0.82	0.80	0.80	0.77
	10.00	0.91	0.90	0.89	0.87	0.87	0.86	0.84	0.83	0.83	0.81	0.80	0.77