



配光特性

図番 MR140415

カタログ番号	T511BW
オプション番号	3000K VIOLED
使用ランプ	VLM-0504-30973
ランプ光束	910.0 lm 1,000
最大光度	1444 cd
1/2ビーム角	
A断面	30.00 °
C断面	
B断面	



60SPOT	角度	光度
	0°	1444
	10°	1098
	20°	483
	30°	193
	40°	27
	50°	4
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

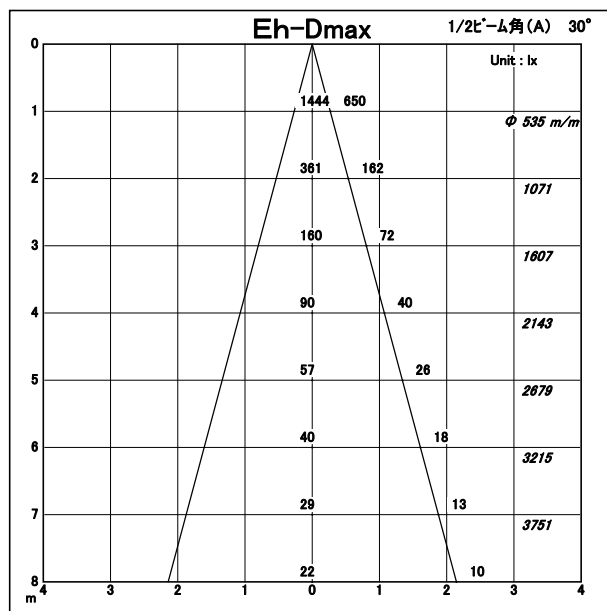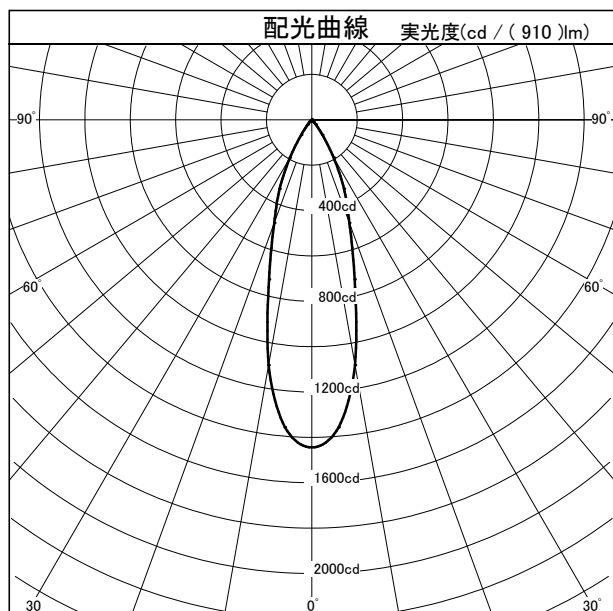

照 明 率 表		平均照度=台数*照明率*保守率* 910 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室 指 数	0.50	0.46	0.43	0.42	0.46	0.43	0.42	0.45	0.43	0.41	0.45	0.43	0.41
	0.70	0.52	0.49	0.47	0.51	0.49	0.47	0.50	0.48	0.47	0.50	0.48	0.46
	1.00	0.56	0.54	0.52	0.55	0.53	0.52	0.55	0.53	0.51	0.54	0.52	0.50
	1.25	0.59	0.56	0.55	0.58	0.56	0.54	0.57	0.55	0.53	0.55	0.54	0.52
	1.50	0.61	0.58	0.57	0.59	0.57	0.56	0.58	0.56	0.55	0.57	0.55	0.53
	2.00	0.63	0.61	0.59	0.61	0.60	0.58	0.60	0.58	0.57	0.58	0.57	0.55
	2.50	0.64	0.63	0.61	0.62	0.61	0.60	0.61	0.59	0.58	0.59	0.58	0.56
	3.00	0.65	0.64	0.62	0.63	0.62	0.61	0.61	0.60	0.59	0.60	0.59	0.56
	4.00	0.67	0.65	0.64	0.64	0.63	0.62	0.62	0.61	0.61	0.60	0.60	0.57
	5.00	0.68	0.67	0.65	0.65	0.64	0.63	0.63	0.62	0.62	0.61	0.60	0.58
数	7.00	0.69	0.68	0.67	0.66	0.65	0.65	0.64	0.63	0.63	0.61	0.61	0.60
	10.00	0.69	0.69	0.68	0.67	0.66	0.66	0.64	0.64	0.63	0.62	0.61	0.59