



配光特性

図番 MR140357

カタログ番号	T503CW
オプション番号	3500K Ra85
使用ランプ	BLM-1120-35853
ランプ光束	2200.0 lm 1.000
最大光度	20895.2 cd
1/2ビーム角	
A断面	10.40 °
C断面	
B断面	



G.E.M.100 SPOT	角度	光度
	0°	20895
	10°	4121
	20°	74
	30°	3
	40°	0
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	1
	160°	2
	170°	2
	180°	0

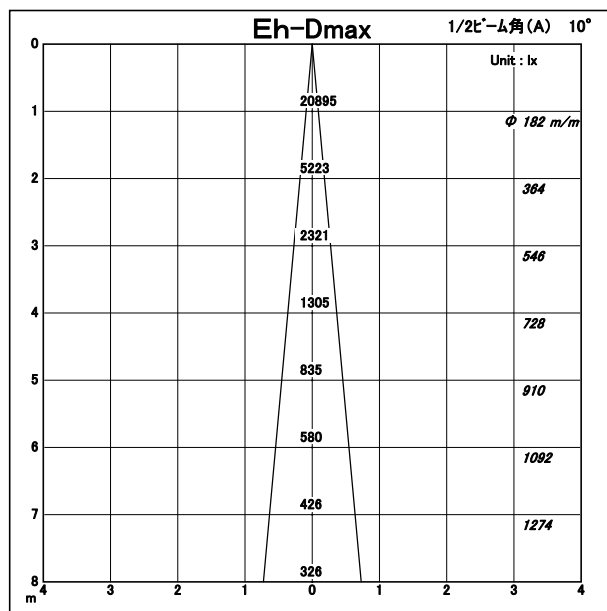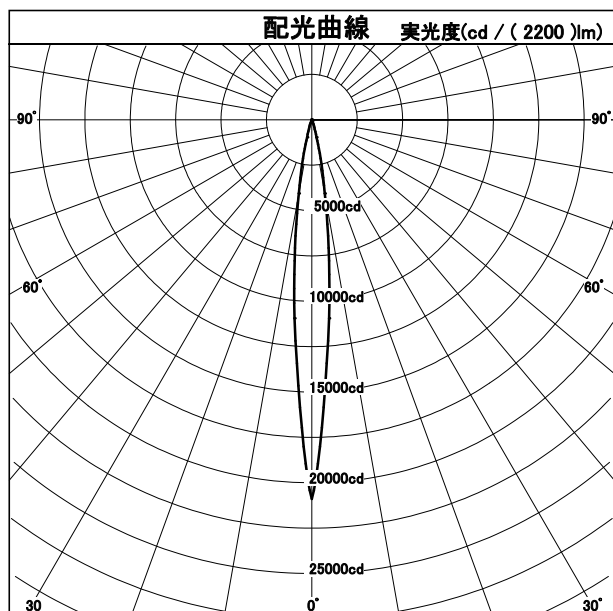

照 明 率 表		平均照度=台数*照明率*保守率* 2200 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.56	0.55	0.54	0.55	0.54	0.54	0.55	0.54	0.54	0.55	0.54	0.53
	0.70	0.57	0.56	0.55	0.56	0.55	0.55	0.56	0.55	0.54	0.56	0.55	0.54
	1.00	0.58	0.57	0.56	0.58	0.56	0.56	0.57	0.56	0.55	0.56	0.55	0.54
	1.25	0.59	0.58	0.57	0.58	0.57	0.56	0.57	0.56	0.56	0.56	0.56	0.55
	1.50	0.60	0.59	0.58	0.59	0.58	0.57	0.57	0.57	0.56	0.56	0.56	0.55
	2.00	0.61	0.60	0.59	0.59	0.58	0.58	0.58	0.57	0.57	0.57	0.56	0.54
	2.50	0.62	0.60	0.60	0.60	0.59	0.58	0.58	0.58	0.57	0.57	0.56	0.55
	3.00	0.62	0.61	0.60	0.60	0.59	0.59	0.58	0.58	0.57	0.57	0.56	0.55
	4.00	0.63	0.62	0.61	0.61	0.60	0.59	0.59	0.58	0.58	0.57	0.57	0.55
	5.00	0.63	0.62	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.57	0.57	0.55
数	7.00	0.64	0.63	0.63	0.61	0.61	0.61	0.59	0.59	0.59	0.57	0.57	0.55
	10.00	0.64	0.64	0.63	0.62	0.61	0.61	0.59	0.59	0.59	0.57	0.57	0.55