



配光特性

図番 MR140358

カタログ番号	T504CW
オプション番号	3500K Ra85
使用ランプ	BLM-1120-35853
ランプ光束	2200.0 lm 1.000
最大光度	126898.cd
1/2ビーム角	
A断面	18.60 °
C断面	
B断面	



G.E.M. 100 SPOT	角度	光度
	0°	126898
	10°	51627
	20°	343
	30°	28
	40°	5
	50°	4
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	1
	130°	1
	140°	3
	150°	6
	160°	12
	170°	8
	180°	0

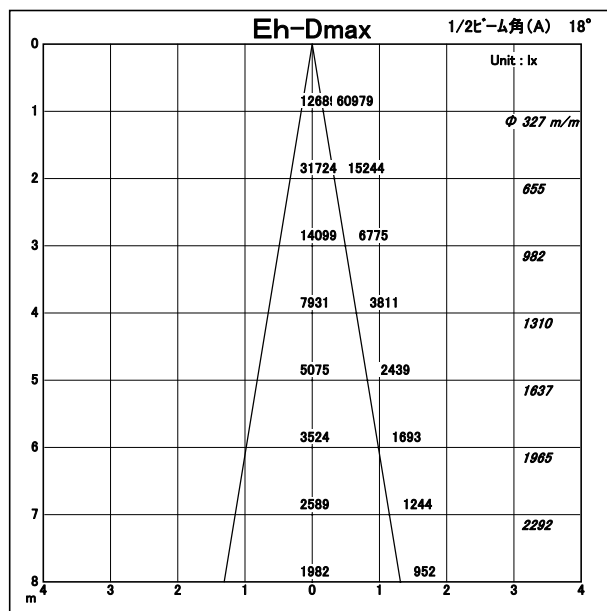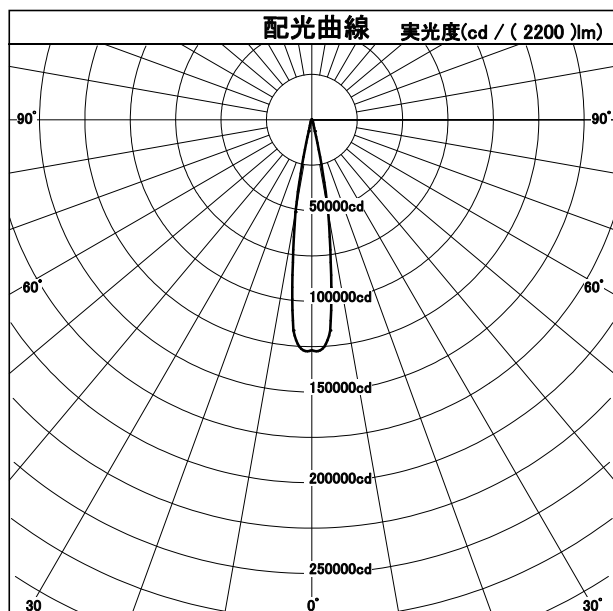

照 明 率 表		平均照度=台数*照明率*保守率* 2200 (光束)/(間口*奥行)											
室	床面反射率(%)	20											
	天井面反射率(%)	0											
指	壁面反射率(%)	0											
		50	30	10	50	30	10	50	30	10	50	30	10
数	0.50	5.71	5.60	5.52	5.68	5.58	5.51	5.65	5.56	5.50	5.63	5.55	5.49
	0.70	5.82	5.70	5.61	5.77	5.66	5.58	5.72	5.63	5.56	5.68	5.60	5.54
	1.00	5.95	5.81	5.71	5.86	5.75	5.67	5.79	5.70	5.62	5.72	5.64	5.58
	1.25	6.03	5.89	5.79	5.92	5.81	5.73	5.82	5.74	5.67	5.73	5.66	5.61
	1.50	6.09	5.96	5.86	5.97	5.86	5.78	5.85	5.77	5.70	5.75	5.68	5.63
	2.00	6.19	6.07	5.97	6.03	5.94	5.86	5.89	5.82	5.76	5.76	5.71	5.66
	2.50	6.26	6.15	6.05	6.08	5.99	5.92	5.92	5.85	5.80	5.77	5.72	5.68
	3.00	6.31	6.20	6.12	6.11	6.04	5.97	5.94	5.88	5.83	5.78	5.73	5.69
	4.00	6.38	6.29	6.21	6.16	6.10	6.04	5.96	5.92	5.87	5.78	5.75	5.72
	5.00	6.42	6.35	6.28	6.19	6.14	6.09	5.98	5.94	5.90	5.79	5.76	5.73
数	7.00	6.48	6.42	6.37	6.23	6.19	6.15	6.00	5.97	5.94	5.79	5.77	5.75
	10.00	6.52	6.48	6.44	6.26	6.23	6.20	6.02	6.00	5.97	5.80	5.78	5.77