



配光特性

図番 MR140358

カタログ番号	T504DW
オプション番号	4000K Ra85
使用ランプ	BLM-1120-40853
ランプ光束	2300.0 lm 1.000
最大光度	13266.6 cd
1/2ビーム角	
A断面	18.00 °
C断面	
B断面	



G.E.M. 100 SPOT	角度	光度
	0°	13267
	10°	5397
	20°	36
	30°	3
	40°	1
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	1
	160°	1
	170°	1
	180°	0

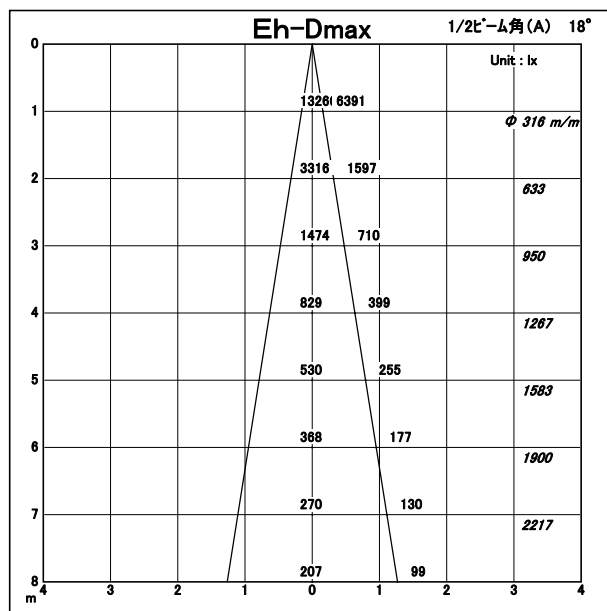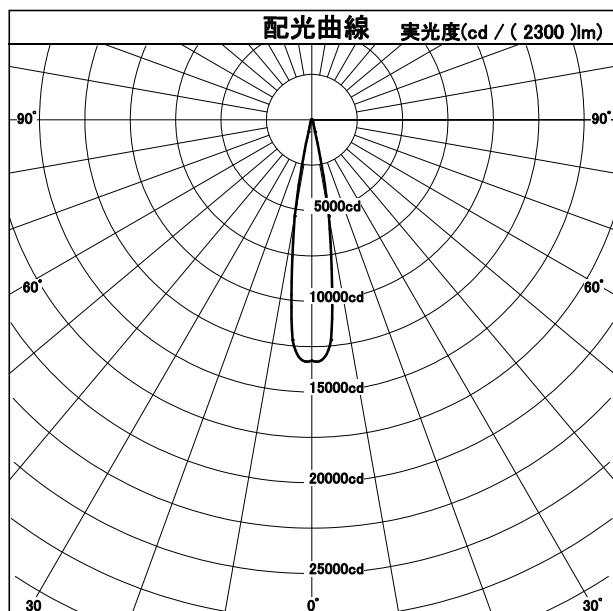

照 明 率 表		平均照度=台数*照明率*保守率* 2300 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.57	0.56	0.55	0.57	0.56	0.55	0.57	0.56	0.55	0.56	0.56	0.55
	0.70	0.58	0.57	0.56	0.58	0.57	0.56	0.57	0.56	0.56	0.57	0.56	0.55
	1.00	0.60	0.58	0.57	0.59	0.58	0.57	0.58	0.57	0.56	0.57	0.57	0.55
	1.25	0.60	0.59	0.58	0.59	0.58	0.57	0.58	0.58	0.57	0.58	0.57	0.55
	1.50	0.61	0.60	0.59	0.60	0.59	0.58	0.59	0.58	0.57	0.58	0.57	0.56
	2.00	0.62	0.61	0.60	0.61	0.60	0.59	0.59	0.58	0.58	0.58	0.57	0.56
	2.50	0.63	0.62	0.61	0.61	0.60	0.59	0.59	0.59	0.58	0.58	0.57	0.56
	3.00	0.63	0.62	0.61	0.61	0.61	0.60	0.60	0.59	0.58	0.58	0.58	0.56
	4.00	0.64	0.63	0.62	0.62	0.61	0.61	0.60	0.59	0.59	0.58	0.58	0.56
	5.00	0.64	0.64	0.63	0.62	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.56
数	7.00	0.65	0.64	0.64	0.63	0.62	0.62	0.60	0.60	0.60	0.58	0.58	0.56
	10.00	0.65	0.65	0.65	0.63	0.63	0.62	0.60	0.60	0.60	0.58	0.58	0.56