



配光特性

図番 MR140427

カタログ番号	T505AW
オプション番号	2700K Ra85
使用ランプ	BLM-1120-27853
ランプ光束	2000.0 lm 1.000
最大光度	2784.4 cd
1/2ビーム角	
A断面	31.00 °
C断面	
B断面	



G.E.M. 100 SPOT	角度	光度
	0°	2784
	10°	2015
	20°	874
	30°	170
	40°	8
	50°	1
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

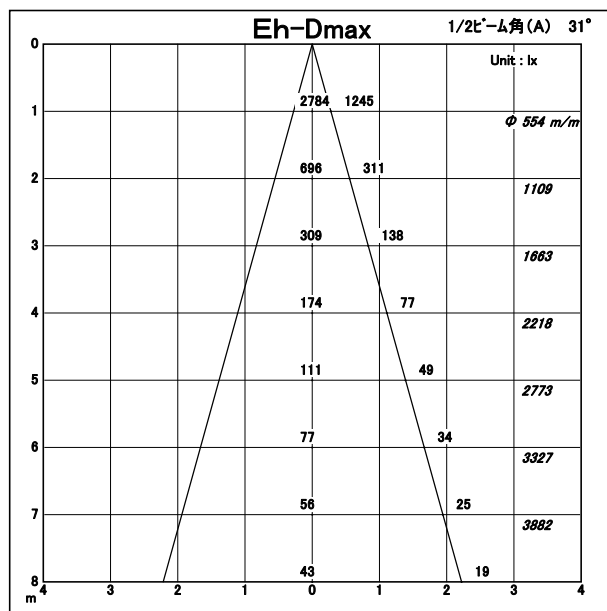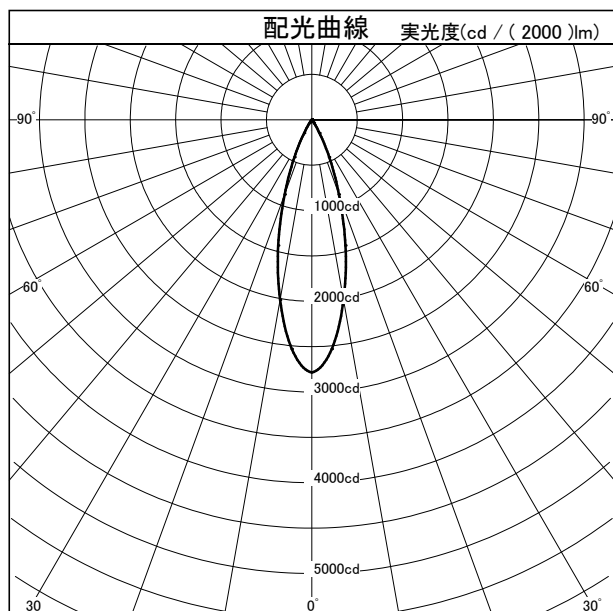

照 明 率 表		平均照度=台数*照明率*保守率* 2000 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	0.35	0.34	0.32	0.35	0.33	0.32	0.35	0.33	0.32	0.34	0.33	0.32
	0.70	0.39	0.37	0.36	0.38	0.37	0.36	0.38	0.36	0.35	0.37	0.36	0.35
	1.00	0.42	0.40	0.39	0.41	0.39	0.38	0.40	0.39	0.38	0.40	0.39	0.38
	1.25	0.43	0.42	0.40	0.42	0.41	0.40	0.41	0.40	0.39	0.41	0.40	0.39
	1.50	0.44	0.43	0.42	0.43	0.42	0.41	0.42	0.41	0.40	0.41	0.41	0.40
	2.00	0.46	0.44	0.43	0.44	0.43	0.42	0.43	0.42	0.42	0.42	0.42	0.41
	2.50	0.47	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.43	0.43	0.42	0.41
	3.00	0.47	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.43	0.43	0.43	0.41
	4.00	0.48	0.47	0.46	0.46	0.46	0.45	0.45	0.44	0.44	0.44	0.43	0.42
	5.00	0.49	0.48	0.47	0.47	0.46	0.46	0.45	0.45	0.44	0.44	0.43	0.42
数	7.00	0.49	0.49	0.48	0.47	0.47	0.47	0.46	0.45	0.45	0.44	0.44	0.42
	10.00	0.50	0.49	0.49	0.48	0.48	0.47	0.46	0.46	0.46	0.44	0.44	0.42