



配光特性

図番 MR140360



カタログ番号	T506AW
オプション番号	2700K Ra85
使用ランプ	BLM-1120-27853
ランプ光束	2000.0 lm 1,000
器具効率	48.5 %
下方効率	48.1 %
上方効率	0.5 %
最大取付間隔	
A断面	
C断面	
B断面	

G.E.M. 100 SPOT	角度	光度
	0°	1849
	10°	1358
	20°	811
	30°	466
	40°	277
	50°	175
	60°	108
	70°	63
	80°	31
	90°	11
	100°	3
	110°	1
	120°	1
	130°	1
	140°	1
	150°	2
	160°	2
	170°	1
	180°	0

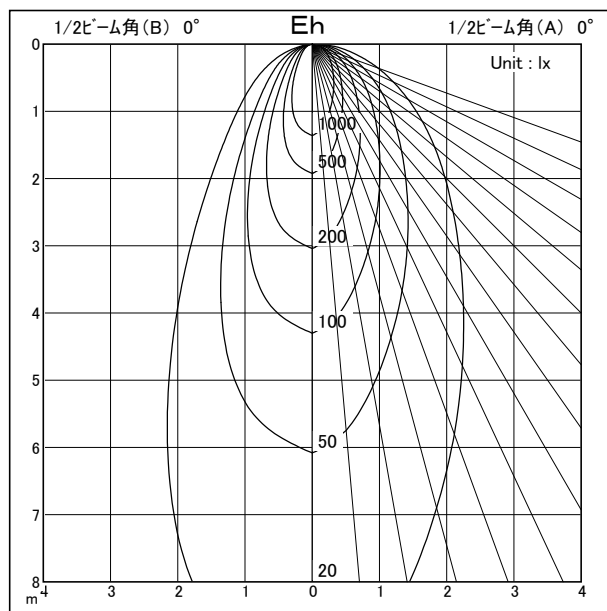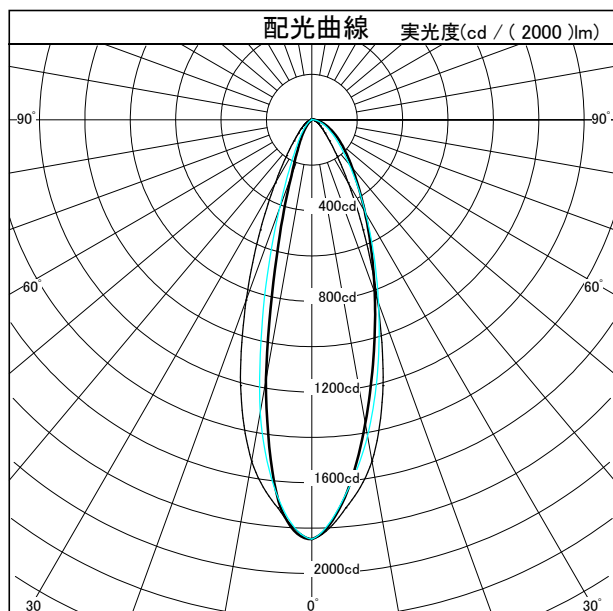

壁面照度分布							単灯	連灯						
(m)	0.50	1.00	1.50	2.00	2.50	3.00	(m)	0.50	1.00	1.50	2.00	2.50	3.00	(m)
0.50	135	83	24	7	2	1		0.50	188	183	188			
1.00	165	111	31	10	4	2	1	1.00	238	246	238			
1.50	149	104	36	11	4	2	1	1.50	233	237	233			
2.00	113	85	38	12	5	2	1	2.00	201	202	201			
2.50	80	64	34	13	5	2	1	2.50	162	161	162			
3.00	55	46	28	13	5	2	1	3.00	126	125	126			
3.50	38	32	22	12	5	2	1	3.50	97	95	97			
壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0 鉛直振角15°								単位: lx						

TL LABORATORY INC.