



配光特性

図番 SALIOT



カタログ番号	YDT45NB/W		
使用ランプ	LED W		
ランプ光束	1198.0	lm	1.000
最大光度	12160.9cd		
1／2ビーム角			
A断面	11.00 °		
C断面			
B断面			

SALIOT™ φ125 ユニバーサルダウンライト	角度	光度
	0°	12161
	10°	1276
	20°	315
	30°	244
	40°	196
	50°	127
	60°	87
	70°	59
	80°	19
	90°	7
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

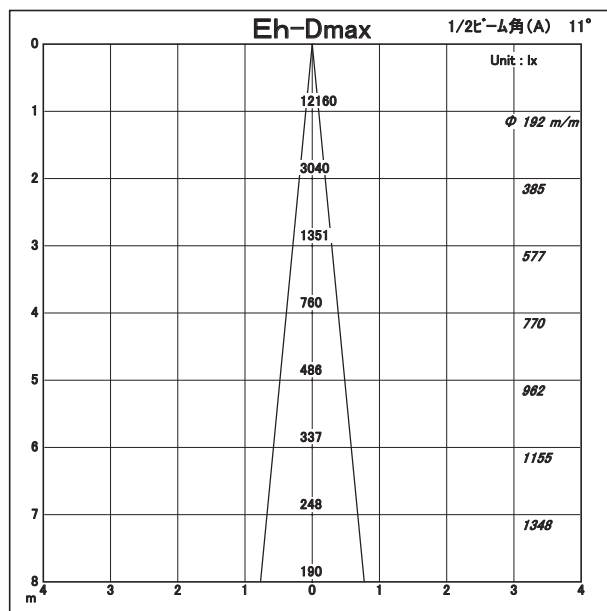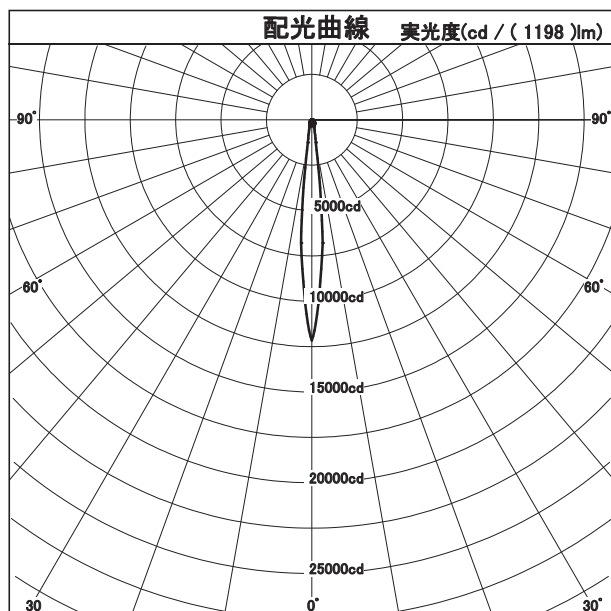

照 明 率 表		平均照度=台数*照明率*保守率* 1198 (光束)/(間口*奥行)												
室	床面反射率(%)	20												0
	天井面反射率(%)	80			60			40			20			0
指	壁面反射率(%)	50	30	10	50	30	10	50	30	10	50	30	10	0
	0.50	0.68	0.63	0.59	0.67	0.62	0.59	0.66	0.62	0.59	0.66	0.61	0.58	0.57
数	0.70	0.76	0.71	0.66	0.75	0.70	0.66	0.74	0.69	0.66	0.73	0.69	0.65	0.64
	1.00	0.85	0.79	0.75	0.83	0.78	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.71
	1.25	0.91	0.85	0.80	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75
	1.50	0.94	0.89	0.85	0.92	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.79
	2.00	1.00	0.95	0.91	0.97	0.93	0.89	0.94	0.90	0.87	0.91	0.88	0.86	0.83
	2.50	1.04	0.99	0.95	1.00	0.96	0.93	0.97	0.94	0.91	0.94	0.91	0.89	0.86
	3.00	1.06	1.02	0.98	1.02	0.99	0.96	0.99	0.96	0.94	0.96	0.93	0.91	0.89
	4.00	1.10	1.06	1.03	1.05	1.03	1.00	1.02	0.99	0.97	0.98	0.96	0.95	0.92
	5.00	1.12	1.09	1.06	1.07	1.05	1.03	1.03	1.01	1.00	1.00	0.98	0.97	0.93
	7.00	1.14	1.12	1.10	1.10	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.96
	10.00	1.16	1.15	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.01	0.97