


配光特性

図番 SALIOT





カタログ番号	YDT45WB/W		
使用ランプ	LED W		
ランプ光束	1437.0	lm	1.000
最大光度	3456	cd	
1/2ビーム角			
A断面	31.00 °		
C断面			
B断面			

SALIOT™ φ125 ユニバーサルダウンライト	角度	光度
	0°	3456
	10°	2591
	20°	896
	30°	267
	40°	194
	50°	127
	60°	82
	70°	53
	80°	18
	90°	7
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0



断面

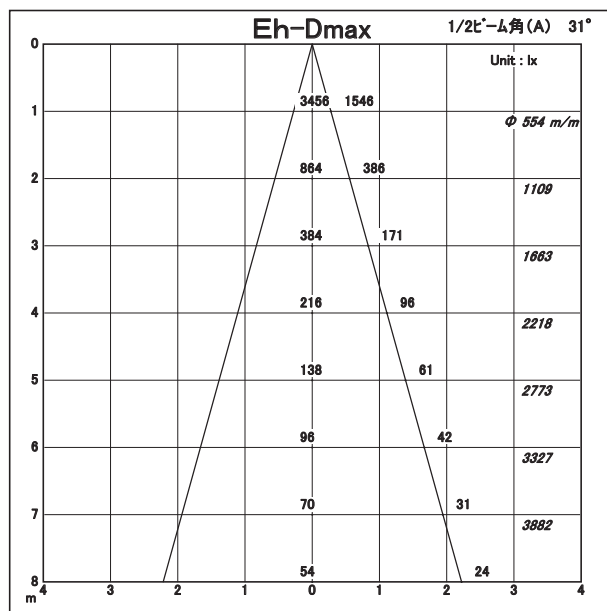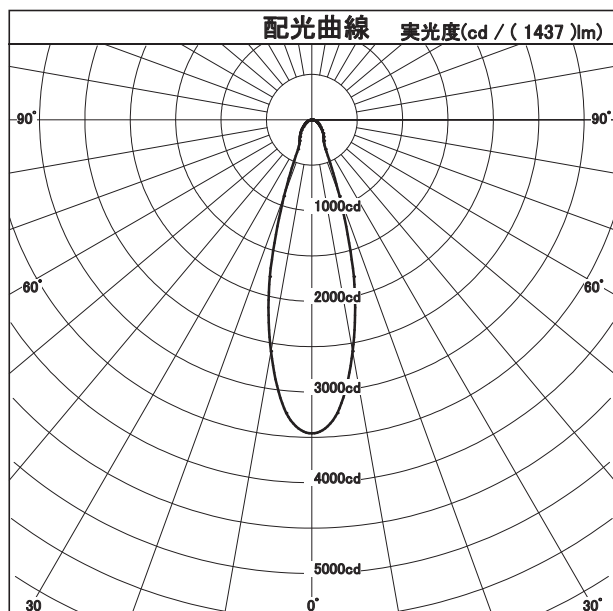

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1437 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.67	0.61	0.58	0.66	0.61	0.58	0.65	0.61	0.57	0.64	0.60	0.57	0.56
	0.70	0.76	0.70	0.66	0.75	0.69	0.66	0.73	0.69	0.65	0.72	0.68	0.65	0.64
	1.00	0.85	0.79	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.80	0.76	0.73	0.71
	1.25	0.90	0.85	0.80	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.80	0.78	0.76
	1.50	0.94	0.89	0.85	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.79
指	2.00	0.99	0.94	0.91	0.96	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.83
	2.50	1.02	0.98	0.95	0.99	0.96	0.93	0.96	0.93	0.91	0.93	0.91	0.89	0.86
	3.00	1.05	1.01	0.98	1.01	0.98	0.95	0.98	0.95	0.93	0.95	0.93	0.91	0.88
	4.00	1.08	1.05	1.02	1.04	1.01	0.99	1.00	0.98	0.96	0.97	0.95	0.94	0.91
	5.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.00	0.99	0.98	0.97	0.96	0.92
数	7.00	1.12	1.10	1.08	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.99	0.98	0.94
	10.00	1.14	1.13	1.11	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.00	1.00	0.96