

配光特性


図番 MR140671

カタログ番号	T1108
オプション番号	4000K Ra90
使用ランプ	LXZ2-4090
ランプ光束	99.0 lm 1,000
最大光度	402.4 cd
1/2ビーム角	
A断面	19.00 °
C断面	
B断面	





角度	光度
0°	402
10°	189
20°	59
30°	6
40°	3
50°	1
60°	1
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

LED JACK SPOT PIP1



断面

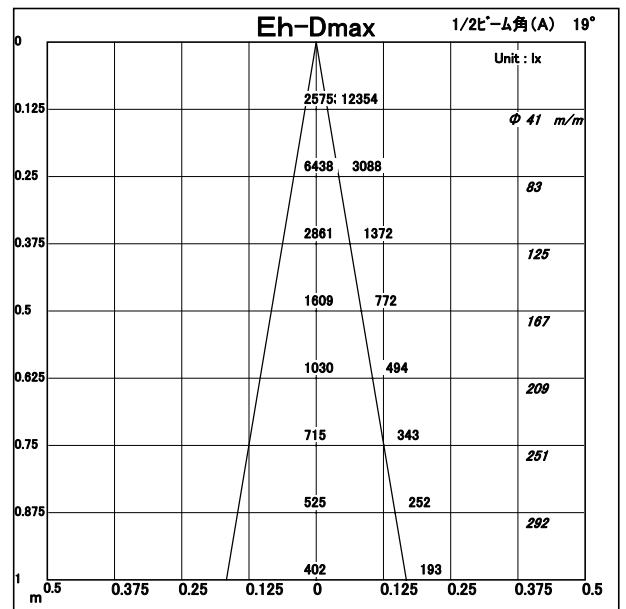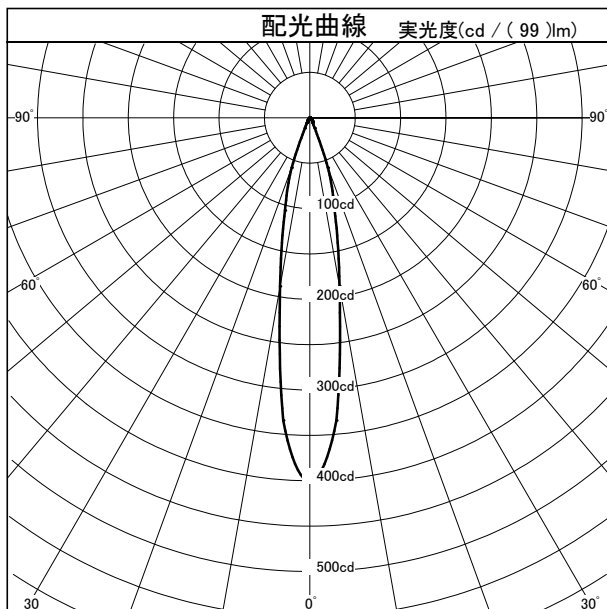

照 明 率 表		平均照度=台数×照明率×保守率×99(光束)/(間口×奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室	0.50	0.62	0.60	0.58	0.62	0.59	0.58	0.61	0.59	0.58	0.61	0.59	0.58
	0.70	0.67	0.64	0.62	0.66	0.64	0.62	0.66	0.63	0.62	0.65	0.63	0.62
	1.00	0.71	0.69	0.67	0.70	0.68	0.66	0.69	0.67	0.66	0.68	0.66	0.65
	1.25	0.74	0.71	0.69	0.72	0.70	0.68	0.71	0.69	0.68	0.70	0.68	0.67
	1.50	0.75	0.73	0.71	0.74	0.72	0.70	0.72	0.70	0.69	0.71	0.69	0.68
	2.00	0.78	0.76	0.74	0.76	0.74	0.72	0.74	0.72	0.71	0.72	0.71	0.70
	2.50	0.79	0.77	0.76	0.77	0.75	0.74	0.75	0.73	0.72	0.73	0.72	0.71
	3.00	0.80	0.79	0.77	0.78	0.76	0.75	0.75	0.74	0.73	0.73	0.72	0.72
	4.00	0.82	0.80	0.79	0.79	0.78	0.77	0.76	0.75	0.75	0.74	0.73	0.73
	5.00	0.83	0.81	0.80	0.80	0.79	0.78	0.77	0.76	0.75	0.74	0.74	0.73
指	7.00	0.84	0.83	0.82	0.81	0.80	0.79	0.78	0.77	0.76	0.75	0.74	0.74
	10.00	0.85	0.84	0.83	0.81	0.81	0.80	0.78	0.78	0.77	0.75	0.75	0.75