



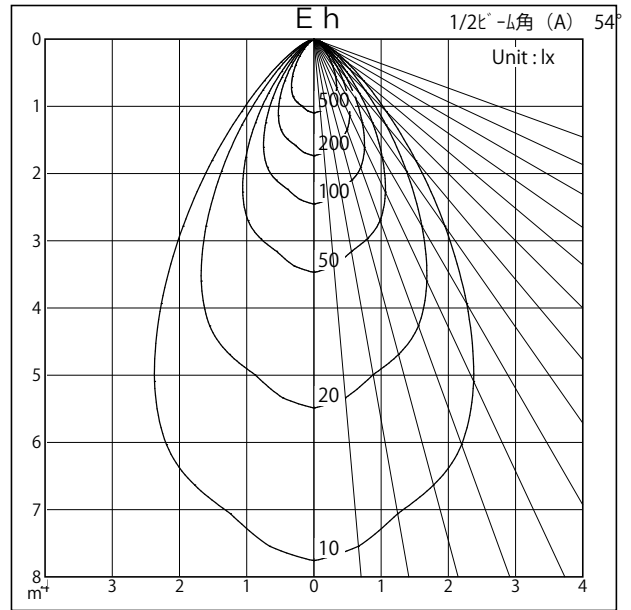

カタログ番号	L4283W		
オプション番号	3000K		
使用ランプ	LED 3W		
ランプ光束	471.0	lm	1.000
器具効率	100.1 %		
下方効率	100.1 %		
上方効率	0.0 %		
最大取付間隔			
A断面	0.85 H		
C断面			
B断面			

	角度	光度
	0°	602
	10°	522
	20°	439
	30°	238
	40°	73
	50°	14
	60°	3
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

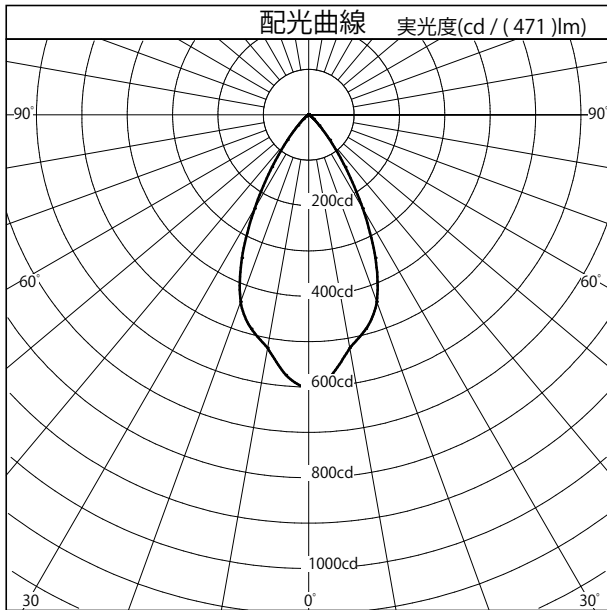

照明率表		平均照度=台数*照明率*保守率*471(光束)/(間口*奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.65	0.60	0.56	0.64	0.59	0.56	0.64	0.59	0.56	0.63	0.59	0.55	0.54
	0.70	0.77	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.74	0.70	0.67	0.65
	1.00	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.83	0.79	0.77	0.75
	1.25	0.93	0.88	0.84	0.91	0.87	0.83	0.89	0.85	0.83	0.87	0.84	0.82	0.80
	1.50	0.97	0.92	0.89	0.94	0.91	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83
指	2.00	1.02	0.98	0.94	0.99	0.95	0.93	0.96	0.93	0.91	0.94	0.91	0.89	0.87
	2.50	1.05	1.01	0.98	1.02	0.99	0.96	0.99	0.96	0.94	0.96	0.94	0.92	0.90
	3.00	1.07	1.04	1.01	1.03	1.01	0.98	1.00	0.98	0.96	0.97	0.95	0.94	0.91
	4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.96	0.93
	5.00	1.12	1.09	1.07	1.07	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
数	7.00	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	1.00	0.96
	10.00	1.15	1.14	1.13	1.10	1.09	1.09	1.06	1.05	1.05	1.02	1.02	1.01	0.97