




# 配光特性

図番 BE\_66512



カタログ番号	K4618W		
オプション番号	3000K		
使用ランプ	LED 6.4W		
器具光束	297.0	lm	1,000
器具効率	100.0 %		
下方効率	50.0 %		
上方効率	50.0 %		
最大取付間隔	下方向	上方向	
A断面	0.34 H	0.00 H	
C断面			
B断面			

	角度	光度
	0°	824
	10°	407
	20°	120
	30°	13
	40°	1
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	1
	150°	13
	160°	120
170°	407	
180°	824	

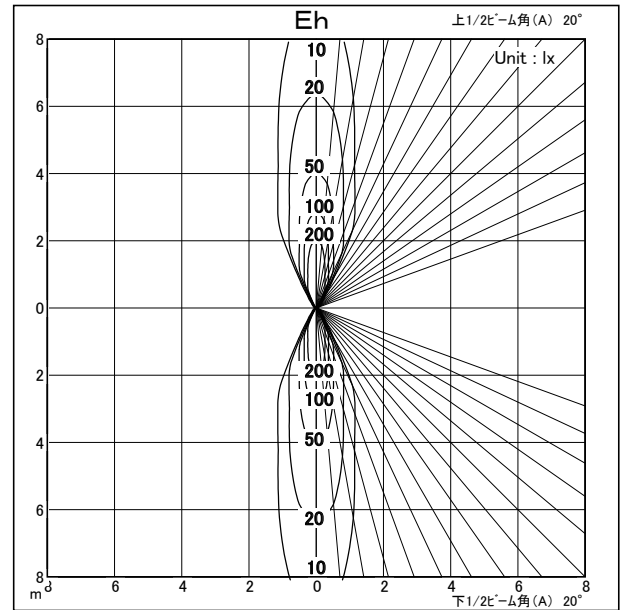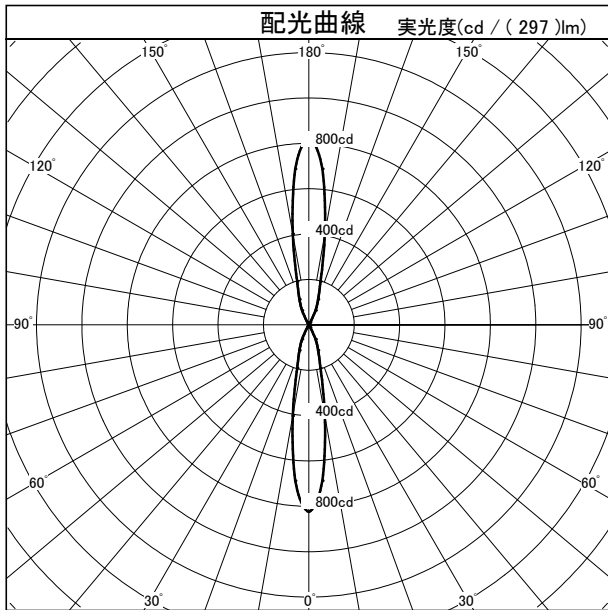

照明率表		平均照度=台数 * 照明率 * 保守率 * 297 (光束) / (間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.58	0.53	0.49	0.54	0.50	0.47	0.50	0.47	0.45	0.46	0.44	0.42	0.40
	0.70	0.66	0.60	0.57	0.60	0.56	0.53	0.55	0.52	0.50	0.50	0.48	0.46	0.42
	1.00	0.74	0.69	0.65	0.67	0.63	0.60	0.59	0.57	0.55	0.53	0.51	0.50	0.45
	1.25	0.79	0.74	0.70	0.70	0.66	0.63	0.62	0.59	0.57	0.54	0.53	0.52	0.46
	1.50	0.82	0.77	0.73	0.73	0.69	0.66	0.64	0.62	0.60	0.56	0.54	0.53	0.46
指	2.00	0.87	0.83	0.79	0.76	0.73	0.71	0.66	0.64	0.63	0.57	0.56	0.55	0.47
	2.50	0.91	0.87	0.83	0.79	0.76	0.74	0.68	0.66	0.65	0.58	0.57	0.56	0.48
	3.00	0.93	0.89	0.86	0.81	0.78	0.76	0.69	0.68	0.66	0.59	0.58	0.57	0.48
	4.00	0.96	0.93	0.90	0.83	0.81	0.79	0.71	0.70	0.68	0.60	0.59	0.58	0.49
数	5.00	0.98	0.96	0.93	0.84	0.83	0.81	0.72	0.71	0.70	0.60	0.60	0.59	0.49
	7.00	1.01	0.99	0.97	0.86	0.85	0.84	0.73	0.72	0.71	0.61	0.60	0.60	0.49
	10.00	1.02	1.01	0.99	0.88	0.87	0.86	0.74	0.73	0.73	0.61	0.61	0.61	0.49