


配光特性

図番 BE_33326



カタログ番号	K4625B	
オプション番号	3000K	
使用ランプ	LED 9.5W	
器具光束	567.0	lm 1,000
器具効率	100.0 %	
下方効率	50.0 %	
上方効率	50.0 %	
最大取付間隔	下方向	上方向
A断面		
C断面		
B断面		



		角度	光度
BEGA Wall Luminaire 		0°	99
		10°	97
		20°	92
		30°	84
		40°	73
		50°	60
		60°	45
		70°	28
		80°	10
		90°	0
		100°	10
		110°	28
		120°	45
		130°	60
		140°	73
		150°	84
		160°	92
		170°	97
180°	99		

断面



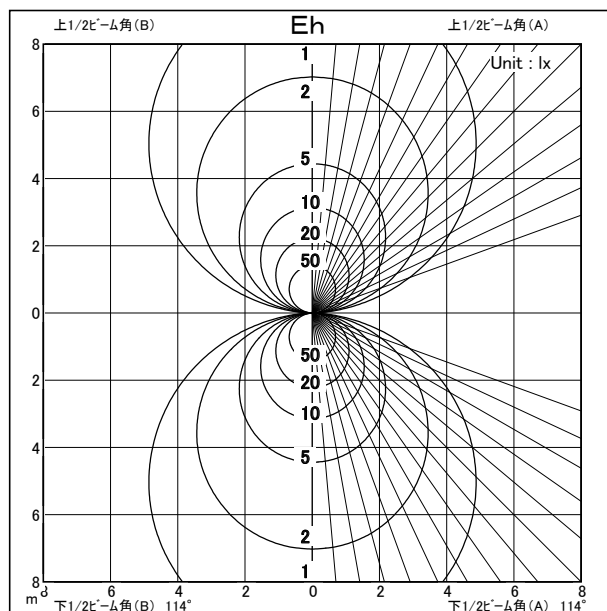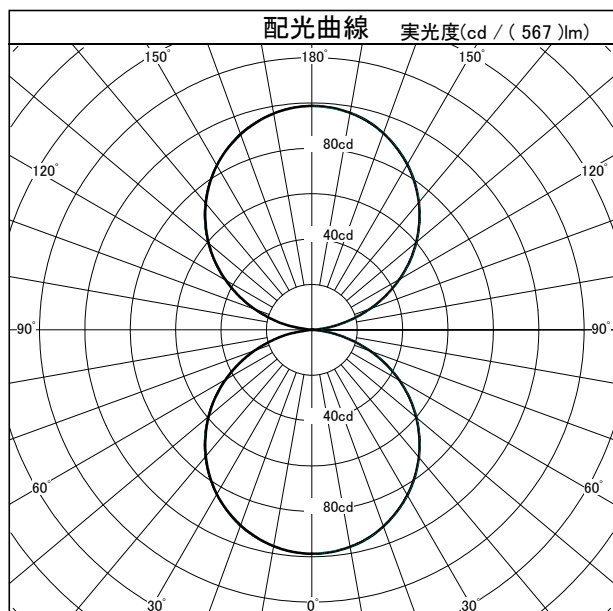

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 567 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.33	0.26	0.21	0.29	0.23	0.19	0.25	0.20	0.17	0.21	0.17	0.14	0.11
	0.70	0.44	0.36	0.31	0.38	0.32	0.27	0.33	0.28	0.24	0.27	0.24	0.21	0.16
	1.00	0.57	0.49	0.43	0.49	0.42	0.38	0.41	0.37	0.33	0.35	0.31	0.28	0.22
	1.25	0.64	0.56	0.50	0.55	0.49	0.44	0.47	0.42	0.38	0.39	0.35	0.33	0.26
	1.50	0.69	0.62	0.56	0.60	0.54	0.49	0.50	0.46	0.43	0.42	0.39	0.36	0.29
指	2.00	0.77	0.70	0.65	0.66	0.61	0.57	0.56	0.52	0.49	0.46	0.44	0.41	0.33
	2.50	0.82	0.76	0.71	0.70	0.66	0.62	0.59	0.56	0.53	0.49	0.47	0.45	0.36
	3.00	0.86	0.80	0.76	0.73	0.69	0.66	0.62	0.59	0.56	0.51	0.49	0.47	0.38
	4.00	0.91	0.86	0.82	0.77	0.74	0.71	0.65	0.63	0.61	0.54	0.52	0.51	0.41
	5.00	0.94	0.90	0.86	0.80	0.77	0.74	0.67	0.65	0.63	0.55	0.54	0.53	0.42
数	7.00	0.97	0.94	0.92	0.83	0.81	0.79	0.70	0.68	0.67	0.57	0.56	0.55	0.44
	10.00	1.00	0.98	0.96	0.85	0.84	0.82	0.71	0.70	0.69	0.59	0.58	0.57	0.46