





カタログ番号	T4517B		
使用ランプ	LED 17.9W		
ランプ光束	2140.0	lm	1,000
器具効率	100.0 %		
下方効率	100.0 %		
上方効率	0.0 %		
最大取付間隔			
A断面	1.09 H		
C断面	1.24 H		
B断面	1.24 H		

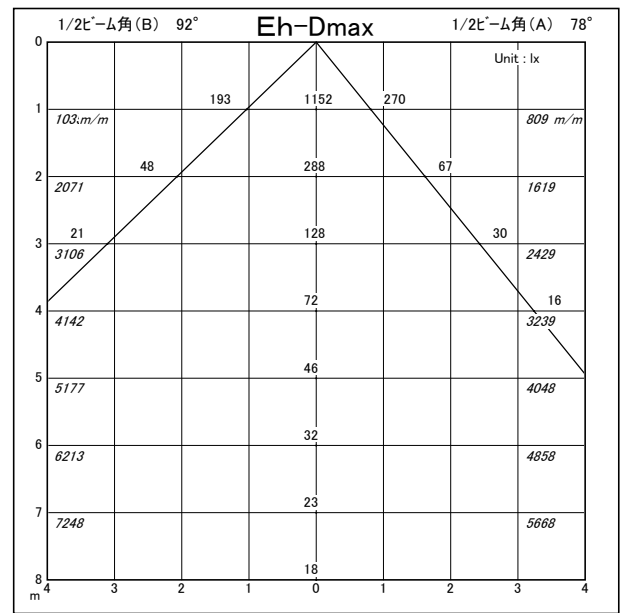

<b>BEGA</b> Floodlight  	角度	光度
	0°	1152
	10°	1162
	20°	1076
	30°	812
	40°	555
	50°	196
	60°	42
	70°	15
	80°	4
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

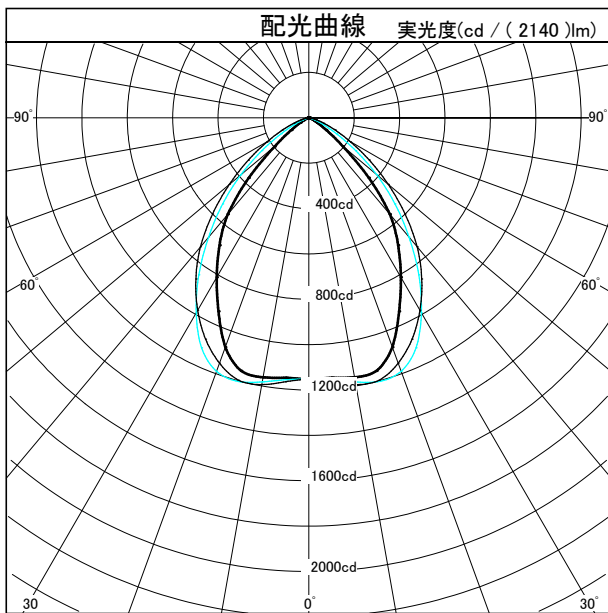

照明率表		平均照度=台数*照明率*保守率*2140(光束)/(間口*奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.49	0.41	0.37	0.48	0.41	0.37	0.47	0.41	0.37	0.46	0.40	0.36	0.35
	0.70	0.63	0.55	0.50	0.61	0.55	0.50	0.60	0.54	0.50	0.59	0.53	0.49	0.47
	1.00	0.76	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.71	0.66	0.62	0.60
	1.25	0.84	0.77	0.72	0.81	0.75	0.71	0.79	0.74	0.70	0.77	0.73	0.69	0.67
	1.50	0.89	0.83	0.78	0.86	0.81	0.77	0.84	0.79	0.75	0.81	0.77	0.74	0.72
指	2.00	0.95	0.90	0.86	0.92	0.88	0.84	0.89	0.86	0.82	0.87	0.84	0.81	0.78
	2.50	1.00	0.95	0.91	0.96	0.92	0.89	0.93	0.90	0.87	0.90	0.87	0.85	0.82
	3.00	1.03	0.98	0.95	0.99	0.95	0.92	0.95	0.92	0.90	0.92	0.90	0.88	0.85
	4.00	1.07	1.03	1.00	1.03	1.00	0.97	0.99	0.96	0.94	0.95	0.94	0.92	0.89
数	5.00	1.09	1.06	1.03	1.05	1.02	1.00	1.01	0.99	0.97	0.97	0.96	0.94	0.91
	7.00	1.12	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.00	0.99	0.98	0.97	0.93
	10.00	1.14	1.12	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.95