

配光特性

図番 BE_77601K3

カタログ番号	T4501B
オプション番号	3000K
使用ランプ	LED 4.2W
器具光束	376.0 lm 1,000
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.55 H
C断面	
B断面	





BEGA

FLOOD LIGHT



断面

角度	光度
0°	812
10°	627
20°	312
30°	152
40°	53
50°	4
60°	2
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

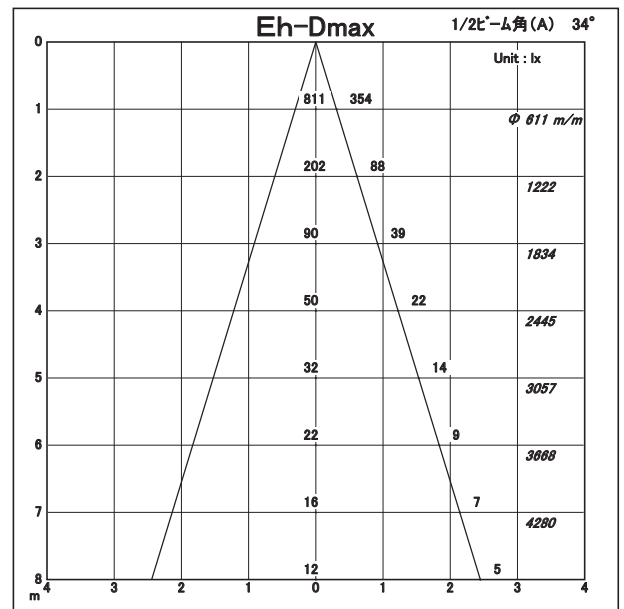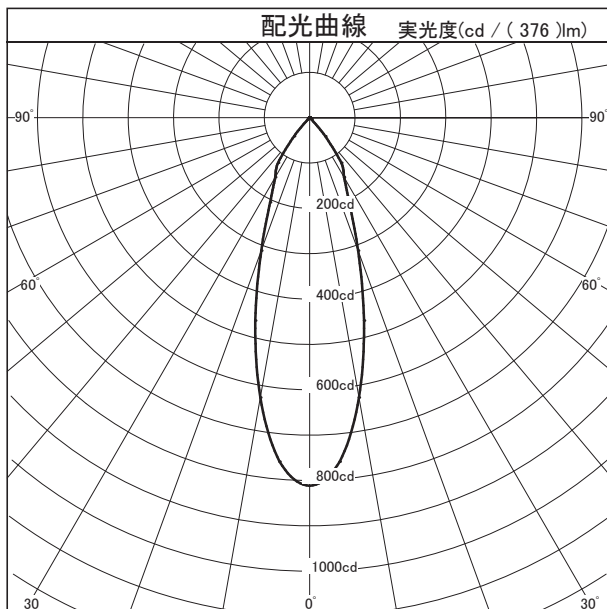

照 明 率 表		平均照度=台数*照明率*保守率* 376 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室	0.50	0.72	0.67	0.64	0.71	0.67	0.64	0.70	0.66	0.63	0.70	0.66	0.63
	0.70	0.82	0.77	0.74	0.81	0.77	0.74	0.80	0.76	0.73	0.79	0.75	0.73
	1.00	0.91	0.87	0.83	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81
	1.25	0.96	0.92	0.88	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85
	1.50	0.99	0.95	0.92	0.97	0.93	0.90	0.95	0.92	0.89	0.92	0.90	0.88
	2.00	1.04	1.00	0.97	1.01	0.98	0.95	0.98	0.95	0.93	0.95	0.93	0.92
	2.50	1.06	1.03	1.00	1.03	1.00	0.98	1.00	0.98	0.96	0.97	0.95	0.94
	3.00	1.08	1.05	1.02	1.04	1.02	1.00	1.01	0.99	0.98	0.98	0.97	0.95
	4.00	1.11	1.08	1.06	1.07	1.05	1.03	1.03	1.02	1.00	1.00	0.99	0.98
	5.00	1.12	1.10	1.08	1.08	1.06	1.05	1.04	1.03	1.02	1.01	1.00	0.99
指	7.00	1.14	1.12	1.11	1.10	1.08	1.07	1.05	1.05	1.04	1.02	1.01	1.00
	10.00	1.16	1.14	1.13	1.11	1.10	1.09	1.06	1.06	1.05	1.02	1.02	1.01

配光特性



図番 BE_77601K3

カタログ番号	T4501B
オプション番号	Z4205 3000K
使用ランプ	LED 4.2W
器具光束	330.0 lm 1,000
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.57 H
C断面	0.62 H
B断面	0.69 H





BEGA

FLOOD LIGHT



角度	光度
0°	538
10°	422
20°	229
30°	115
40°	31
50°	10
60°	6
70°	3
80°	1
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

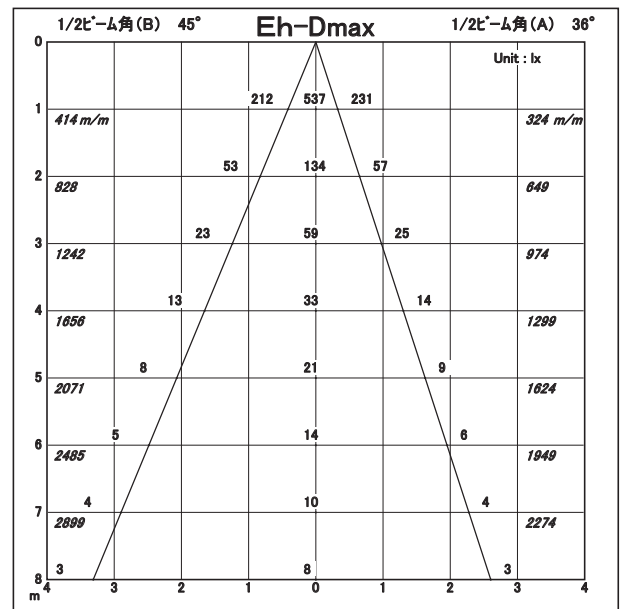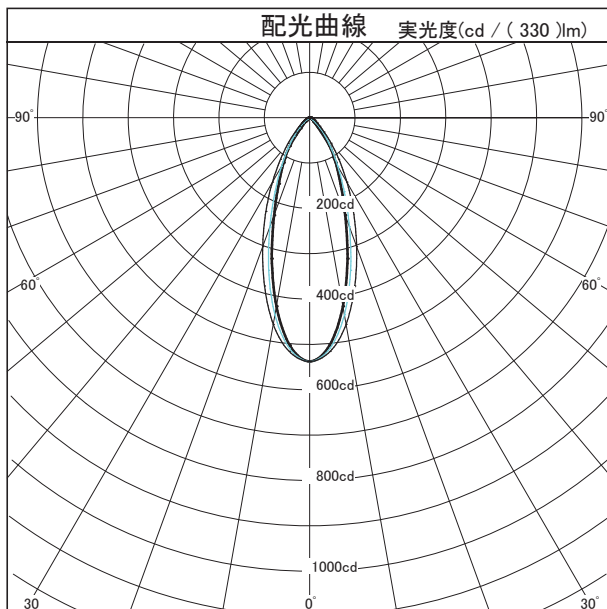


照 明 率 表		平均照度=台数*照明率*保守率* 330 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室	0.50	0.65	0.60	0.56	0.65	0.59	0.56	0.64	0.59	0.56	0.63	0.59	0.56
	0.70	0.77	0.71	0.67	0.75	0.70	0.67	0.74	0.70	0.66	0.73	0.69	0.66
	1.00	0.87	0.82	0.78	0.85	0.80	0.77	0.84	0.79	0.76	0.82	0.78	0.75
	1.25	0.93	0.87	0.83	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80
	1.50	0.96	0.91	0.88	0.94	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84
	2.00	1.02	0.97	0.94	0.98	0.95	0.92	0.96	0.93	0.90	0.93	0.91	0.89
	2.50	1.05	1.01	0.98	1.01	0.98	0.95	0.98	0.96	0.93	0.95	0.93	0.91
	3.00	1.07	1.03	1.00	1.03	1.00	0.98	1.00	0.98	0.96	0.97	0.95	0.93
	4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.96
	5.00	1.12	1.10	1.07	1.08	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98
指	7.00	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.03	1.02	1.01	1.00
	10.00	1.16	1.15	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.01


配光特性

図番 77601K3

カタログ番号	T4501B
オプション番号	Z4270B 3000K
使用ランプ	LED 4.2W
器具光束	274.0 lm 1,000
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	



BEGA FLOOD LIGHT 	角度	光度
	0°	782
	10°	489
	20°	144
	30°	17
	40°	3
	50°	1
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

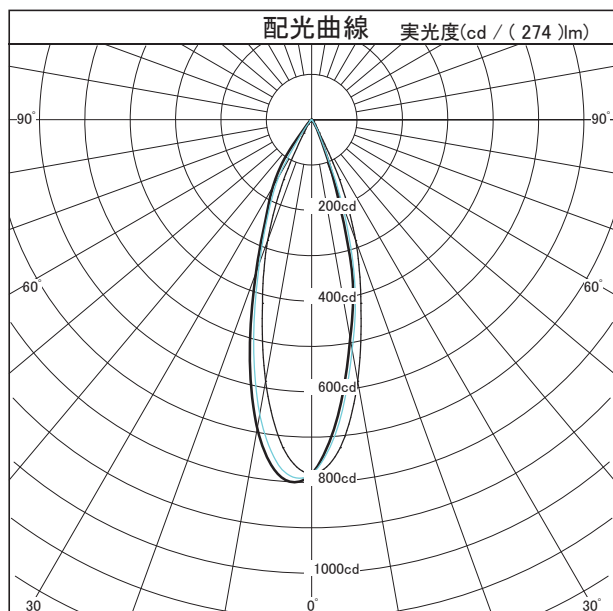

1/2°-Δ角(B) 0°	Eh-Dmax	1/2°-Δ角(A) 0°
0	781	0
1	195	0
2	86	0
3	46	0
4	31	0
5	21	0
6	15	0
7	12	0
8		

照 明 率 表													
平均照度=台数×照明率×保守率×274(光束)/(間口×奥行)													
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.79	0.75	0.72	0.78	0.74	0.72	0.78	0.74	0.72	0.77	0.74	0.71
	0.70	0.88	0.83	0.80	0.86	0.83	0.80	0.85	0.82	0.79	0.84	0.81	0.79
	1.00	0.95	0.91	0.88	0.93	0.90	0.87	0.92	0.89	0.86	0.90	0.88	0.86
	1.25	0.99	0.95	0.92	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89
	1.50	1.02	0.98	0.95	0.99	0.96	0.94	0.97	0.95	0.92	0.95	0.93	0.91
	2.00	1.05	1.02	0.99	1.02	1.00	0.98	1.00	0.98	0.96	0.97	0.96	0.94
	2.50	1.08	1.05	1.02	1.04	1.02	1.00	1.01	1.00	0.98	0.99	0.97	0.96
	3.00	1.09	1.07	1.04	1.06	1.04	1.02	1.03	1.01	0.99	1.00	0.98	0.97
	4.00	1.12	1.09	1.07	1.08	1.06	1.04	1.04	1.03	1.01	1.01	1.00	0.99
	5.00	1.13	1.11	1.09	1.09	1.07	1.06	1.05	1.04	1.03	1.01	1.01	1.00
数	7.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.02	1.01
	10.00	1.16	1.15	1.14	1.11	1.10	1.10	1.07	1.06	1.06	1.03	1.02	1.02