



配光特性

図番 TF-24B1-1B



カタログ番号	T4386B
オプション番号	3000K
使用ランプ	LED 9W
ランプ光束	1112.0 lm 1,000
最大光度	2877.7 cd
1 / 2 ビーム角	
A 断面	30.00 °
C 断面	
B 断面	

角度	光度
0°	2878
10°	2187
20°	812
30°	414
40°	126
50°	9
60°	5
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

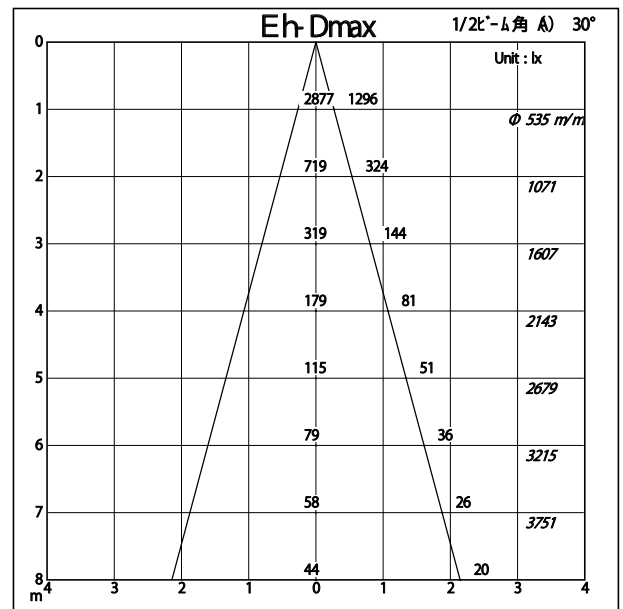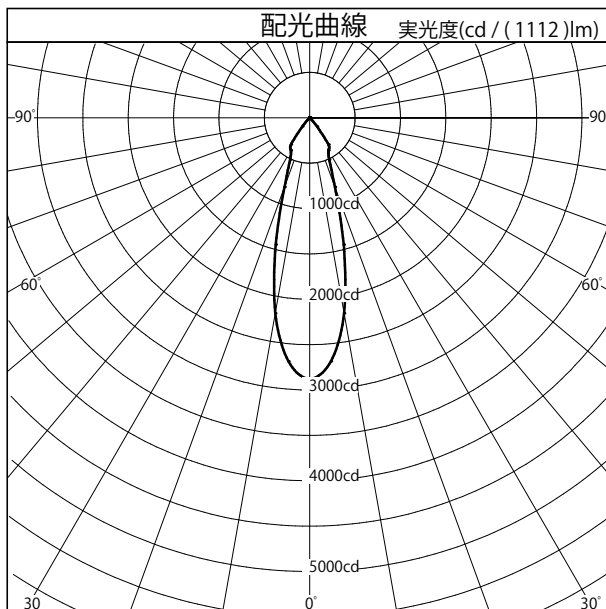

照 明 率 表		平均照度=台数*照明率*保守率* 1112 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		0											
壁面反射率 %		0											
室 指 数	0.50	0.75	0.70	0.67	0.74	0.70	0.67	0.73	0.70	0.67	0.73	0.69	0.67
	0.70	0.84	0.80	0.76	0.83	0.79	0.76	0.82	0.79	0.76	0.81	0.78	0.75
	1.00	0.93	0.88	0.85	0.91	0.87	0.84	0.90	0.86	0.84	0.88	0.85	0.83
	1.25	0.97	0.93	0.90	0.95	0.91	0.89	0.93	0.90	0.88	0.91	0.89	0.87
	1.50	1.00	0.96	0.93	0.98	0.94	0.92	0.96	0.93	0.90	0.94	0.91	0.89
	2.00	1.04	1.01	0.98	1.01	0.98	0.96	0.99	0.96	0.94	0.96	0.94	0.93
	2.50	1.07	1.04	1.01	1.04	1.01	0.99	1.01	0.99	0.97	0.98	0.96	0.95
	3.00	1.08	1.06	1.03	1.05	1.03	1.01	1.02	1.00	0.98	0.99	0.97	0.96
	4.00	1.11	1.09	1.07	1.07	1.05	1.04	1.04	1.02	1.01	1.00	0.99	0.98
	5.00	1.13	1.11	1.09	1.08	1.07	1.05	1.05	1.03	1.02	1.01	1.00	0.99
数	7.00	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.01
	10.00	1.16	1.15	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.02