

配光特性


図番 BE_77700K3

カタログ番号	T4503B
オプション番号	3000K
使用ランプ	LED 26W
器具光束	1196.0 lm 1,000
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.14 H
C断面	
B断面	





BEGA

FLOOD LIGHT



断面

角度	光度
0°	36490
10°	2312
20°	145
30°	17
40°	0
50°	0
60°	0
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

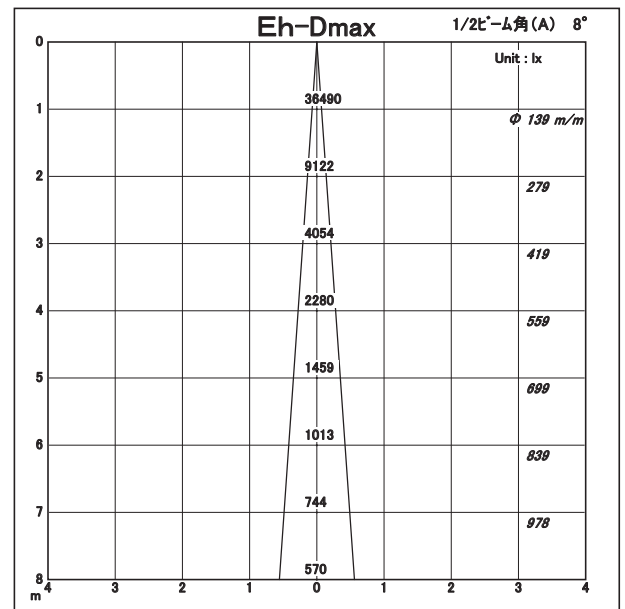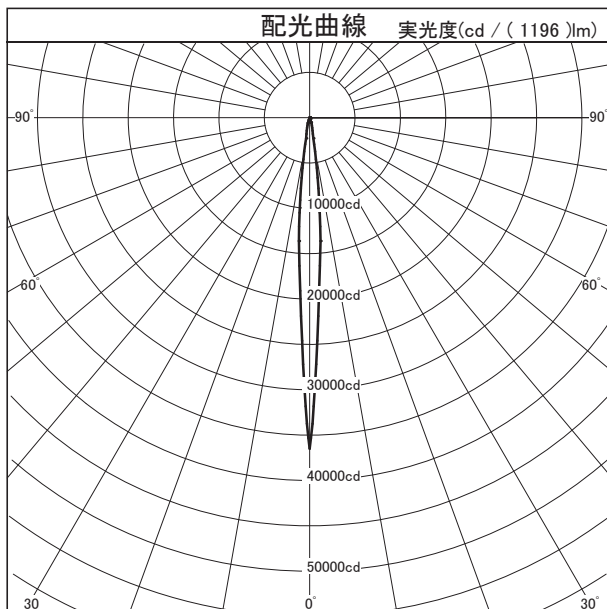

照 明 率 表		平均照度=台数*照明率*保守率* 1196 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		0											
室 指 数	0.50	1.02	1.00	0.99	1.02	1.00	0.99	1.01	1.00	0.98	1.01	0.99	0.98
	0.70	1.05	1.02	1.01	1.04	1.02	1.00	1.03	1.01	1.00	1.02	1.01	0.99
	1.00	1.07	1.05	1.03	1.06	1.04	1.02	1.04	1.03	1.01	1.03	1.02	1.00
	1.25	1.09	1.06	1.04	1.07	1.05	1.03	1.05	1.03	1.02	1.03	1.02	1.01
	1.50	1.10	1.08	1.06	1.08	1.06	1.04	1.06	1.04	1.03	1.04	1.03	1.02
	2.00	1.12	1.10	1.08	1.09	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02
	2.50	1.13	1.11	1.09	1.10	1.08	1.07	1.07	1.06	1.05	1.04	1.03	1.03
	3.00	1.14	1.12	1.11	1.11	1.09	1.08	1.07	1.06	1.05	1.04	1.04	1.03
	4.00	1.15	1.14	1.12	1.11	1.10	1.09	1.08	1.07	1.06	1.05	1.04	1.03
	5.00	1.16	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.07	1.05	1.04	1.04
	7.00	1.17	1.16	1.15	1.13	1.12	1.11	1.09	1.08	1.08	1.05	1.04	1.04
	10.00	1.18	1.17	1.16	1.13	1.13	1.12	1.09	1.09	1.08	1.05	1.05	1.04


配光特性

図番 BE_77700K3

カタログ番号	T4503B
オプション番号	Z4272B 3000K
使用ランプ	LED 26W
器具光束	1002.0 lm 1,000
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	



BEGA FLOOD LIGHT	角度	光度
	0°	28782
	10°	2061
	20°	137
	30°	10
	40°	0
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

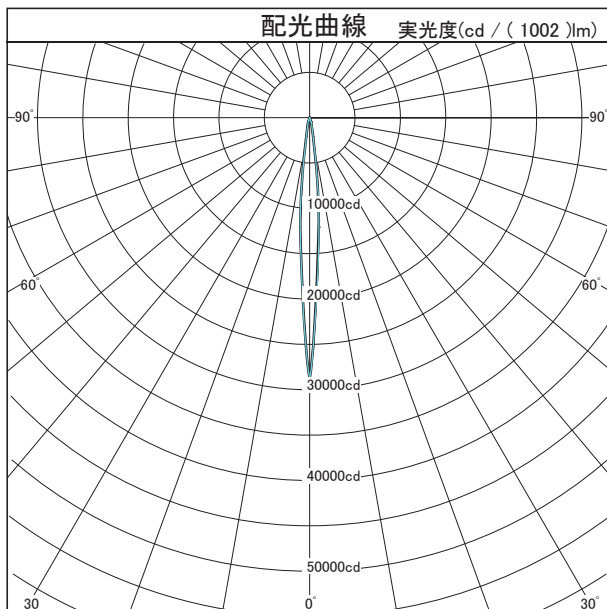

1/2°-Δ角(B) 0°	Eh-Dmax	1/2°-Δ角(A) 0°
0	28782	0
1	7195	0
2	3198	0
3	1798	0
4	1151	0
5	799	0
6	587	0
7	449	0

照 明 率 表		平均照度=台数*照明率*保守率* 1002 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		80											
壁面反射率(%)		50											
室 指 数	0.50	1.05	1.02	1.01	1.04	1.02	1.01	1.04	1.02	1.01	1.03	1.02	1.00
	0.70	1.07	1.05	1.03	1.06	1.04	1.02	1.05	1.03	1.02	1.04	1.03	1.02
	1.00	1.09	1.07	1.05	1.08	1.06	1.04	1.06	1.05	1.03	1.05	1.04	1.03
	1.25	1.11	1.08	1.07	1.09	1.07	1.05	1.07	1.06	1.04	1.06	1.04	1.03
	1.50	1.12	1.10	1.08	1.10	1.08	1.06	1.08	1.06	1.05	1.06	1.05	1.04
	2.00	1.14	1.12	1.10	1.11	1.09	1.08	1.09	1.07	1.06	1.06	1.05	1.04
	2.50	1.15	1.13	1.12	1.12	1.11	1.09	1.09	1.08	1.07	1.06	1.06	1.05
	3.00	1.16	1.14	1.13	1.13	1.11	1.10	1.10	1.08	1.07	1.07	1.06	1.05
	4.00	1.18	1.16	1.15	1.14	1.12	1.11	1.10	1.09	1.08	1.07	1.06	1.06
	5.00	1.18	1.17	1.16	1.14	1.13	1.12	1.10	1.10	1.09	1.07	1.06	1.06
数	7.00	1.20	1.18	1.17	1.15	1.14	1.13	1.11	1.10	1.10	1.07	1.07	1.06
	10.00	1.20	1.20	1.19	1.16	1.15	1.14	1.11	1.11	1.10	1.07	1.07	1.06