

配光特性


図番 BE_77739

カタログ番号	T4511B
オプション番号	4000K Ra90
使用ランプ	LED 73.5W
器具光束	7557.0 lm 1,000
最大光度	28857.9 cd
1/2ビーム角	
A断面	21.00 °
C断面	
B断面	





BEGA

FLOOD LIGHT



断面

角度	光度
0°	28858
10°	15475
20°	4412
30°	2770
40°	1071
50°	79
60°	54
70°	2
80°	1
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

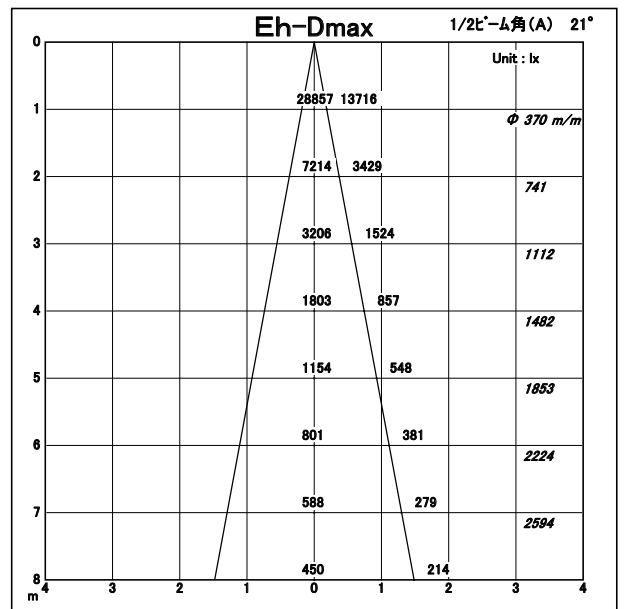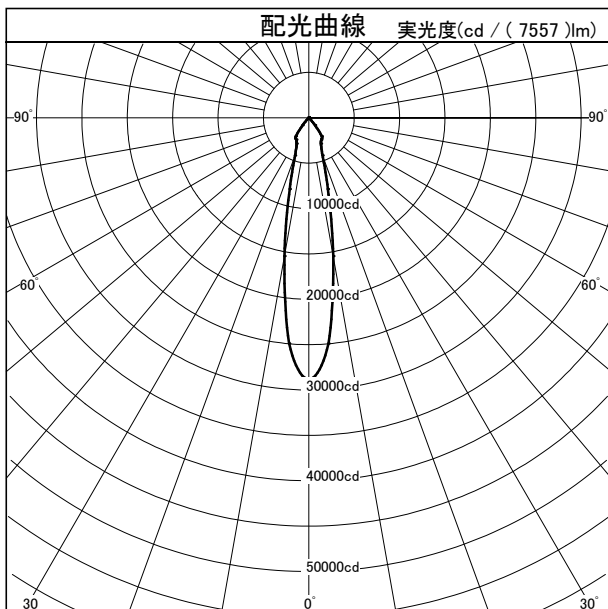

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 7557 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.77	0.72	0.69	0.76	0.72	0.69	0.75	0.71	0.69	0.75	0.71	0.69	0.68
	0.70	0.86	0.81	0.78	0.85	0.81	0.78	0.84	0.80	0.77	0.83	0.79	0.77	0.76
	1.00	0.94	0.90	0.86	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.87	0.84	0.83
	1.25	0.98	0.94	0.91	0.96	0.93	0.90	0.94	0.91	0.89	0.93	0.90	0.88	0.86
	1.50	1.01	0.97	0.94	0.99	0.96	0.93	0.97	0.94	0.92	0.95	0.92	0.90	0.89
指	2.00	1.05	1.02	0.99	1.03	1.00	0.97	1.00	0.97	0.95	0.97	0.95	0.94	0.92
	2.50	1.08	1.05	1.02	1.05	1.02	1.00	1.02	1.00	0.98	0.99	0.97	0.96	0.93
	3.00	1.10	1.07	1.04	1.06	1.04	1.02	1.03	1.01	0.99	1.00	0.98	0.97	0.94
	4.00	1.12	1.10	1.08	1.08	1.06	1.05	1.05	1.03	1.02	1.01	1.00	0.99	0.96
	5.00	1.14	1.12	1.10	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	1.00	0.97
数	7.00	1.15	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.02	0.98
	10.00	1.17	1.16	1.15	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.03	1.03	0.99