



配光特性

図番 TF-19B1-1B

カタログ番号	T4381B		
使用ランプ	LED 71W		
ランプ光束	7761.0	lm	1,000
最大光度	10645	cd	
1 / 2 ビーム角			
A 断面	51.00 °		
C 断面			
B 断面			



角度	光度
0°	10645
10°	9455
20°	6865
30°	4072
40°	1258
50°	58
60°	13
70°	3
80°	1
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

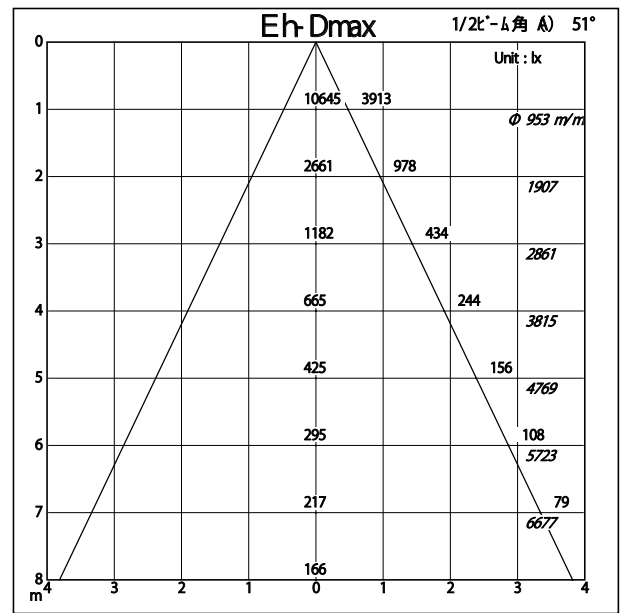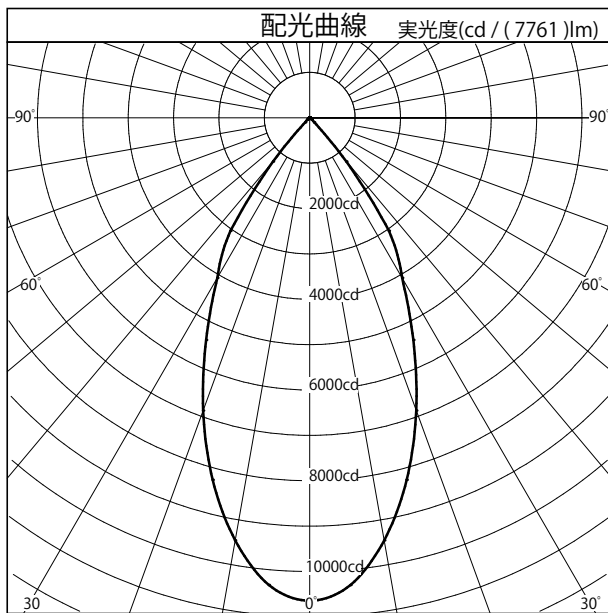

照 明 率 表		平均照度=台数*照明率*保守率* 7761 (光束)/(間口*奥行)												
床面反射率 %		20												
天井面反射率 %		0												
壁面反射率 %		0												
室 指 数	0.50	0.67	0.62	0.58	0.66	0.61	0.58	0.65	0.61	0.58	0.65	0.61	0.58	0.56
	0.70	0.79	0.73	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.75	0.72	0.69	0.67
	1.00	0.89	0.84	0.80	0.87	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.77
	1.25	0.94	0.89	0.86	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81
	1.50	0.98	0.93	0.90	0.95	0.91	0.88	0.93	0.90	0.87	0.91	0.88	0.86	0.84
	2.00	1.02	0.98	0.95	0.99	0.96	0.93	0.97	0.94	0.92	0.94	0.92	0.90	0.88
	2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93	0.90
	3.00	1.07	1.04	1.01	1.04	1.01	0.99	1.00	0.98	0.96	0.97	0.96	0.94	0.91
	4.00	1.10	1.08	1.05	1.06	1.04	1.02	1.03	1.01	0.99	0.99	0.98	0.97	0.94
	5.00	1.12	1.10	1.08	1.08	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
数	7.00	1.14	1.12	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.01	1.00	0.96
	10.00	1.15	1.14	1.13	1.11	1.10	1.09	1.06	1.05	1.05	1.02	1.02	1.01	0.98