






配光特性

図番 MR180284

カタログ番号	H-302H
オプション番号	3000K
使用ランプ	LED 12W
ランプ光束	1200.0 lm 1,000
器具効率	7.1 %
下方効率	7.1 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	



MO-series	角度	光度
	0°	0
	10°	355
	20°	332
	30°	207
BOLLARD	40°	54
	50°	10
	60°	5
	70°	2
	80°	1
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

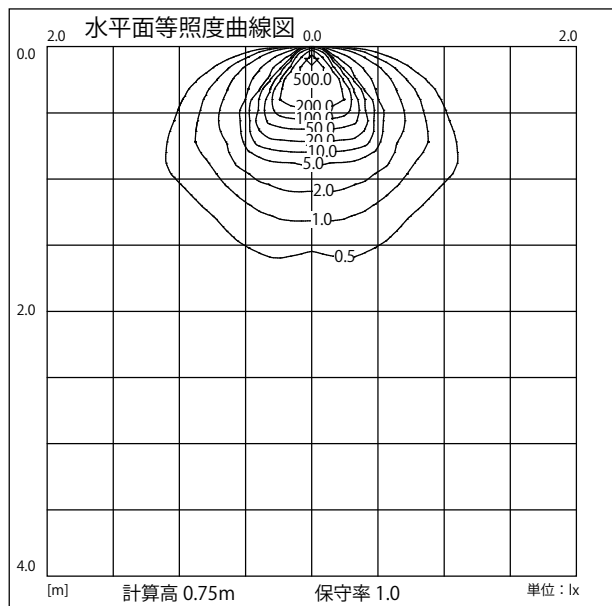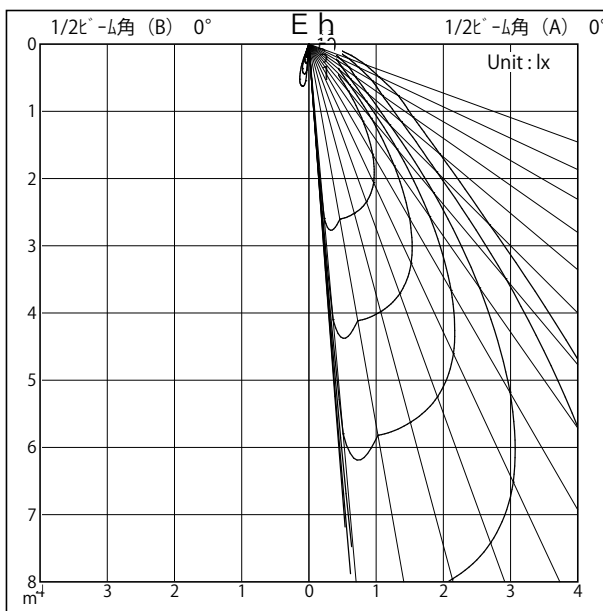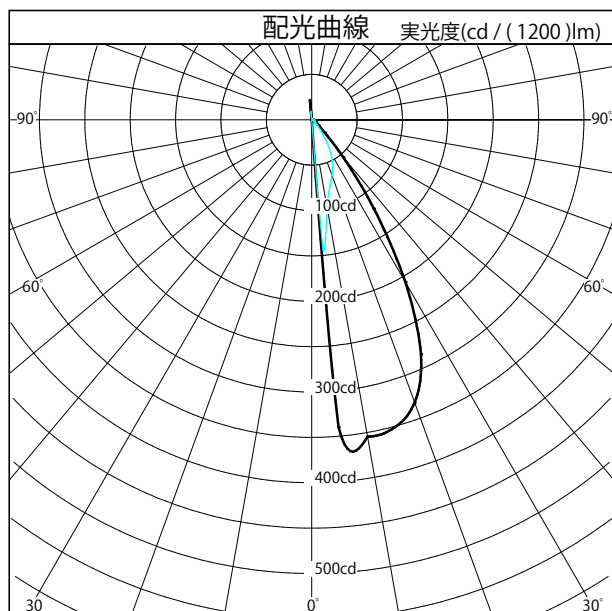

TL LABORATORY INC.