

配光特性

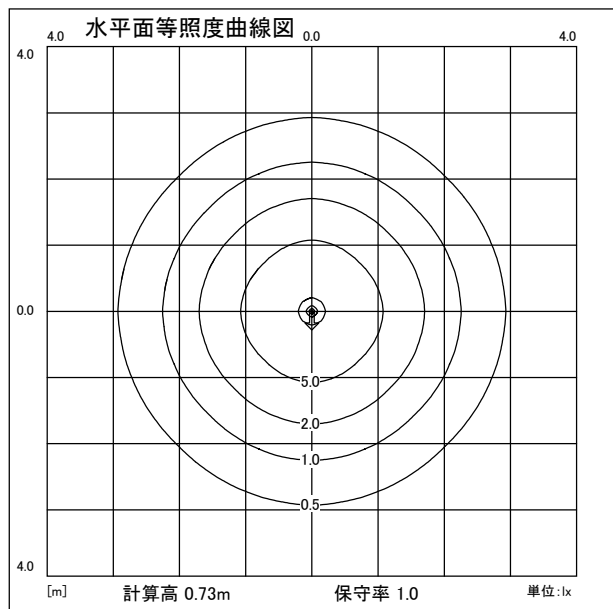
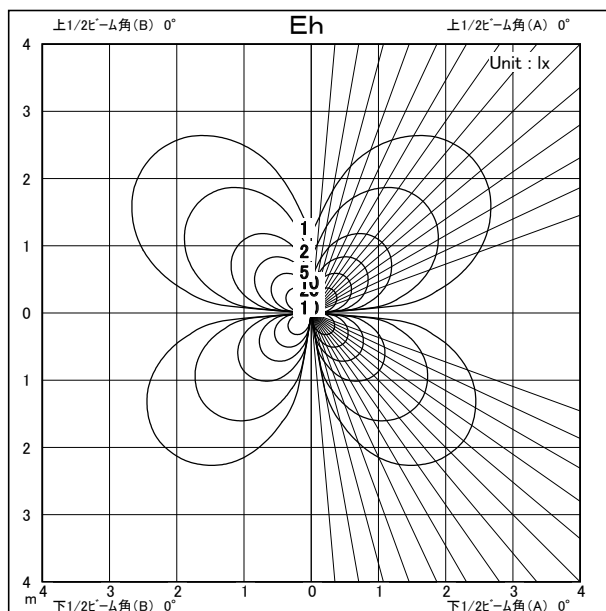
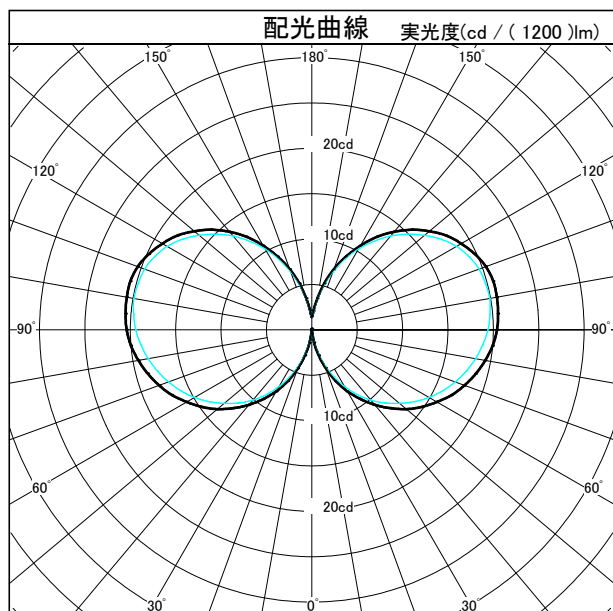
図番 MR180285

カタログ番号	H-303H
オプション番号	3000K
使用ランプ	LED 12W
ランプ光束	1200.0 lm 1,000
器具効率	15.8 %
下方効率	7.2 %
上方効率	8.6 %
最大取付間隔	下方向 上方向
A断面	0.00 H 0.00 H
C断面	0.00 H 0.00 H
B断面	0.00 H 0.00 H



MO-series	角度	光度
	0°	0
	10°	1
	20°	5
	30°	8
	40°	11
	50°	14
	60°	16
	70°	18
	80°	19
	90°	20
	100°	21
	110°	20
	120°	19
	130°	17
	140°	14
	150°	11
160°	7	
170°	4	
180°	1	

断面

TL LABORATORY INC.