

配光特性




図番 MR150483

カタログ番号	H-267B
オプション番号	φ 80 3000K Ra80
使用ランプ	LED 17W
ランプ光束	1940.0 lm 1,000
器具効率	19.5 %
下方効率	16.9 %
上方効率	2.6 %
最大取付間隔	
A断面	
C断面	
B断面	



角度	光度
	0
10°	3
20°	5
30°	11
40°	121
50°	795
60°	937
70°	336
80°	94
90°	28
100°	8
110°	1
120°	2
130°	3
140°	4
150°	4
160°	147
170°	22
180°	1

ONE SIDE DOWN FLOOD

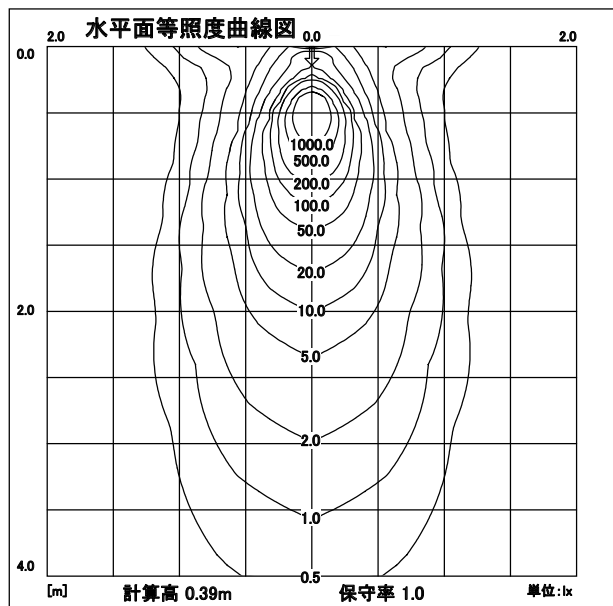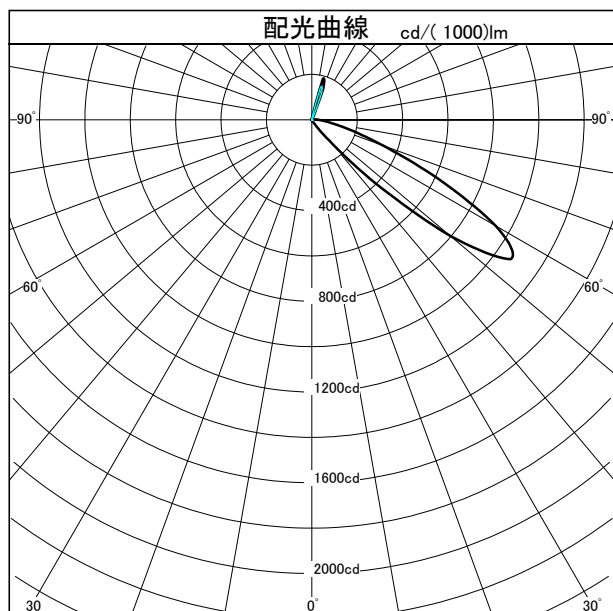

TL LABORATORY INC.