

配光特性




図番 MR140218

カタログ番号	F-198W
オプション番号	3500K(LED)
使用ランプ	LED16.2W
	1.000
最大取付間隔	
A断面	1.30 H
C断面	1.30 H
B断面	1.30 H



角度	光度
0°	352
10°	347
20°	334
30°	312
40°	282
50°	246
60°	207
70°	167
80°	125
90°	60
100°	77
110°	73
120°	67
130°	62
140°	58
150°	56
160°	55
170°	47
180°	14

System-X LED M type

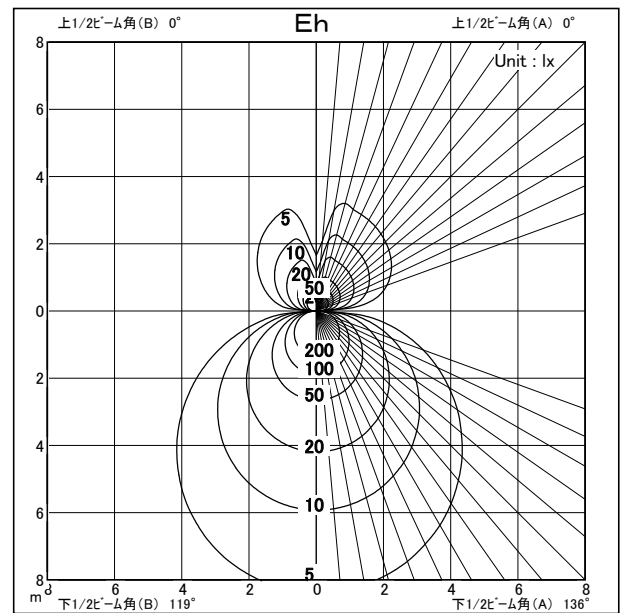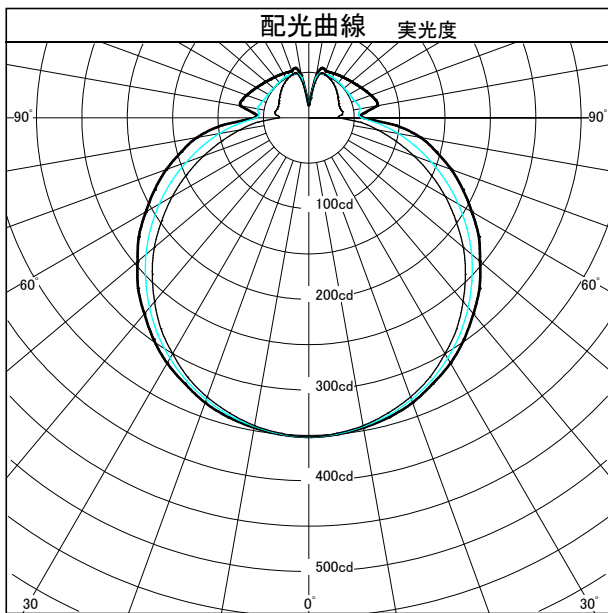

照 明 率 表		平均照度=台数×照明率×保守率×1553.2(光束)/(間口×奥行)												
床面反射率(%)		20												
天井面反射率(%)		0												
壁面反射率(%)		0												
室 指 数	0.50	0.34	0.26	0.20	0.31	0.24	0.19	0.29	0.23	0.18	0.27	0.21	0.17	0.15
	0.70	0.45	0.36	0.30	0.41	0.34	0.28	0.38	0.31	0.26	0.35	0.29	0.25	0.22
	1.00	0.57	0.48	0.41	0.52	0.45	0.39	0.48	0.42	0.37	0.44	0.39	0.34	0.30
	1.25	0.65	0.56	0.49	0.59	0.52	0.46	0.54	0.48	0.43	0.49	0.44	0.40	0.36
	1.50	0.70	0.62	0.55	0.64	0.57	0.51	0.59	0.53	0.48	0.54	0.49	0.45	0.40
	2.00	0.78	0.71	0.64	0.72	0.65	0.60	0.65	0.60	0.56	0.60	0.55	0.52	0.47
	2.50	0.84	0.77	0.71	0.77	0.71	0.66	0.70	0.65	0.61	0.64	0.60	0.57	0.51
	3.00	0.88	0.81	0.76	0.80	0.75	0.70	0.73	0.69	0.65	0.67	0.63	0.60	0.54
	4.00	0.93	0.88	0.83	0.85	0.81	0.77	0.78	0.74	0.71	0.71	0.68	0.65	0.59
	5.00	0.97	0.92	0.88	0.88	0.84	0.81	0.80	0.77	0.75	0.73	0.71	0.69	0.62
数	7.00	1.01	0.97	0.94	0.92	0.89	0.86	0.84	0.82	0.79	0.76	0.75	0.73	0.66
	10.00	1.05	1.02	0.99	0.95	0.93	0.91	0.87	0.85	0.83	0.79	0.78	0.76	0.69