



配光特性

図番

カタログ番号	708RM03/9635/40/DA		
使用ランプ	LED11W		
ランプ光束	841.0	lm	1,000
最大光度	2582	cd	
1/2ビーム角			
A断面	34.00 °		
C断面	33.00 °		
B断面	33.00 °		



	角度	光度
FLOS	0°	2582
	10°	2013
	20°	900
	30°	110
	40°	11
	50°	6
	60°	4
	70°	2
	80°	1
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

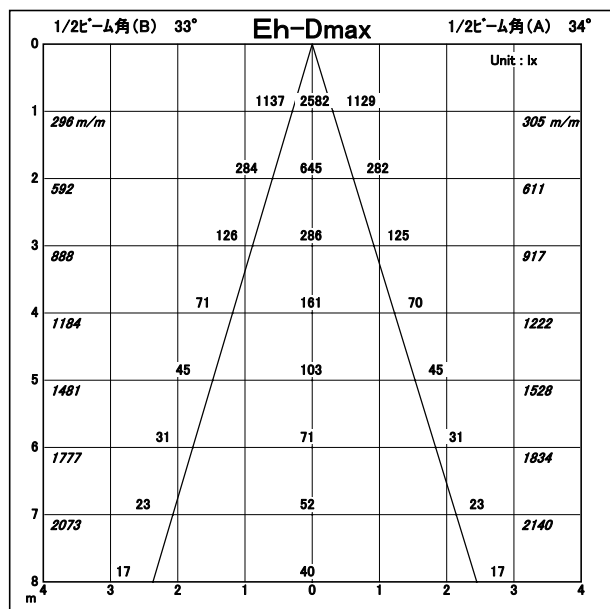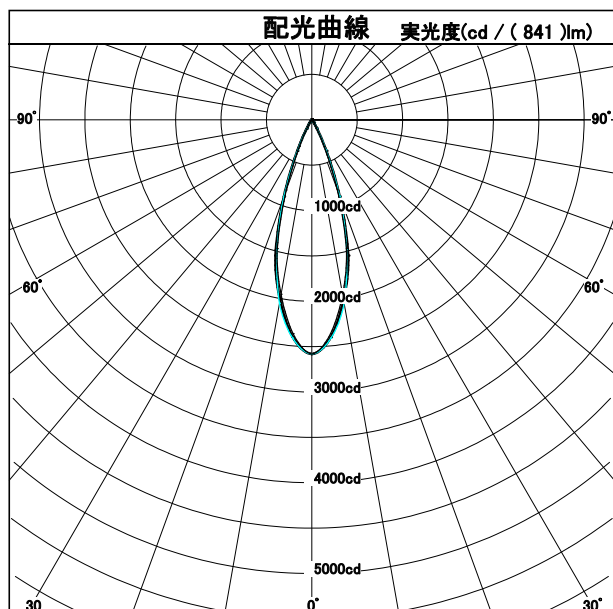

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 841 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.82	0.78	0.76	0.82	0.78	0.76	0.81	0.78	0.75	0.80	0.77	0.75	0.74
	0.70	0.90	0.86	0.83	0.89	0.85	0.83	0.88	0.85	0.82	0.87	0.84	0.82	0.81
	1.00	0.97	0.93	0.90	0.95	0.92	0.89	0.94	0.91	0.88	0.92	0.90	0.88	0.86
	1.25	1.00	0.97	0.94	0.98	0.95	0.93	0.96	0.94	0.92	0.95	0.92	0.91	0.89
	1.50	1.03	0.99	0.96	1.00	0.97	0.95	0.98	0.96	0.94	0.96	0.94	0.93	0.91
指	2.00	1.06	1.03	1.00	1.03	1.01	0.99	1.01	0.99	0.97	0.98	0.97	0.95	0.93
	2.50	1.08	1.05	1.03	1.05	1.03	1.01	1.02	1.00	0.99	0.99	0.98	0.97	0.94
	3.00	1.10	1.07	1.05	1.06	1.04	1.03	1.03	1.02	1.00	1.00	0.99	0.98	0.95
	4.00	1.12	1.10	1.08	1.08	1.06	1.05	1.04	1.03	1.02	1.01	1.00	0.99	0.96
	5.00	1.13	1.11	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.02	1.01	1.00	0.97
数	7.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.05	1.02	1.02	1.01	0.98
	10.00	1.16	1.15	1.14	1.11	1.10	1.10	1.07	1.06	1.06	1.03	1.03	1.02	0.99