
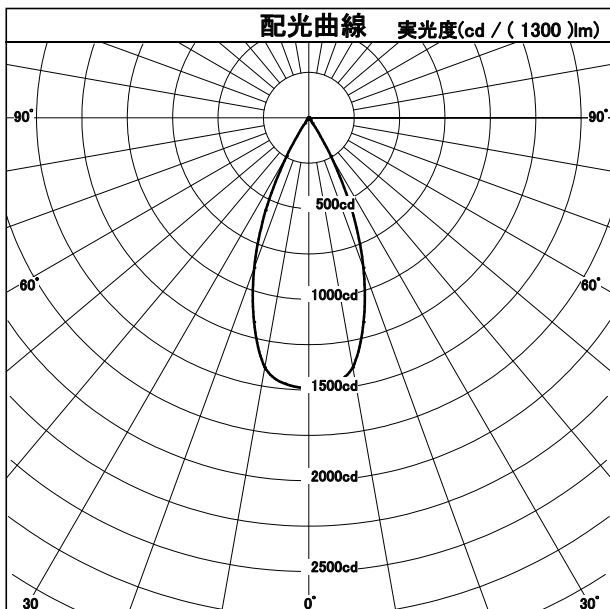



配光特性

図番 MS100059

カタログ番号	K-638B
オプション番号	3000K
使用ランプ	XTM19803013CCA
ランプ光束	1300.0 lm 1,000
最大光度	1487.5 cd
1／2ビーム角	
A断面	44.00 °
C断面	
B断面	



		角度	光度
		0°	1488
		10°	1397
		20°	880
		30°	244
		40°	12
		50°	4
		60°	4
		70°	4
		80°	0
		90°	0
		100°	0
		110°	0
		120°	0
		130°	0
		140°	0
		150°	0
		160°	0
		170°	0
		180°	0

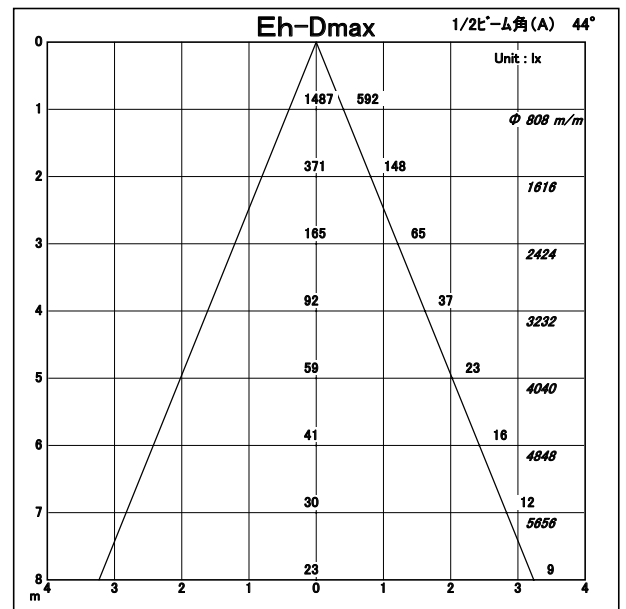

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 1300 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.45	0.42	0.40	0.44	0.42	0.40	0.44	0.42	0.40	0.44	0.41	0.40	0.39
	0.70	0.50	0.48	0.46	0.50	0.47	0.46	0.49	0.47	0.45	0.48	0.47	0.45	0.44
	1.00	0.55	0.53	0.51	0.54	0.52	0.50	0.53	0.51	0.50	0.52	0.51	0.49	0.49
	1.25	0.58	0.55	0.53	0.56	0.54	0.53	0.55	0.54	0.52	0.54	0.53	0.52	0.51
	1.50	0.59	0.57	0.55	0.58	0.56	0.54	0.57	0.55	0.54	0.55	0.54	0.53	0.52
指	2.00	0.62	0.60	0.58	0.60	0.58	0.57	0.58	0.57	0.56	0.57	0.56	0.55	0.54
	2.50	0.63	0.61	0.60	0.61	0.60	0.59	0.60	0.58	0.57	0.58	0.57	0.56	0.55
	3.00	0.64	0.63	0.61	0.62	0.61	0.60	0.60	0.59	0.58	0.58	0.58	0.57	0.55
	4.00	0.66	0.64	0.63	0.63	0.62	0.61	0.61	0.60	0.60	0.59	0.59	0.58	0.56
	5.00	0.66	0.65	0.64	0.64	0.63	0.62	0.62	0.61	0.60	0.60	0.59	0.59	0.57
数	7.00	0.67	0.67	0.66	0.65	0.64	0.64	0.62	0.62	0.61	0.60	0.60	0.59	0.57
	10.00	0.68	0.68	0.67	0.65	0.65	0.64	0.63	0.63	0.62	0.61	0.60	0.60	0.58