



配光特性

図番 YL220007



カタログ番号	J579VN
使用ランプ	2700K
器具光束	1164.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.2 %
最大取付間隔	
A断面	0.82 H
C断面	
B断面	

	角度	光度
	0°	1836
	10°	1758
	20°	1412
	30°	357
	40°	41
	50°	15
	60°	11
	70°	10
	80°	8
	90°	7
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

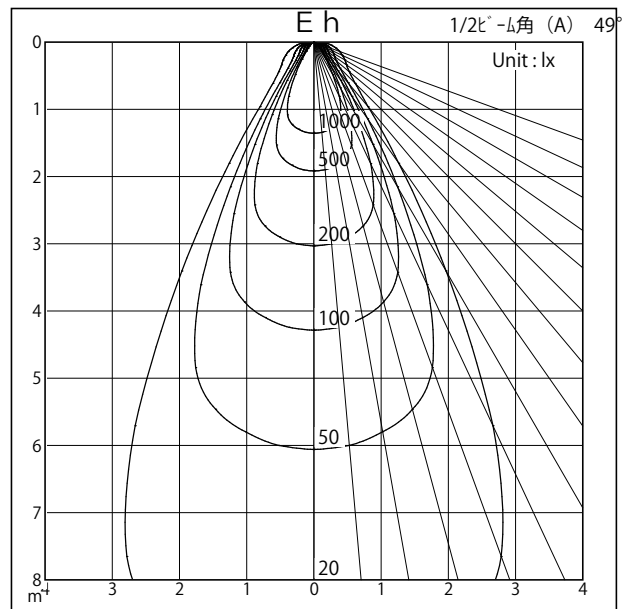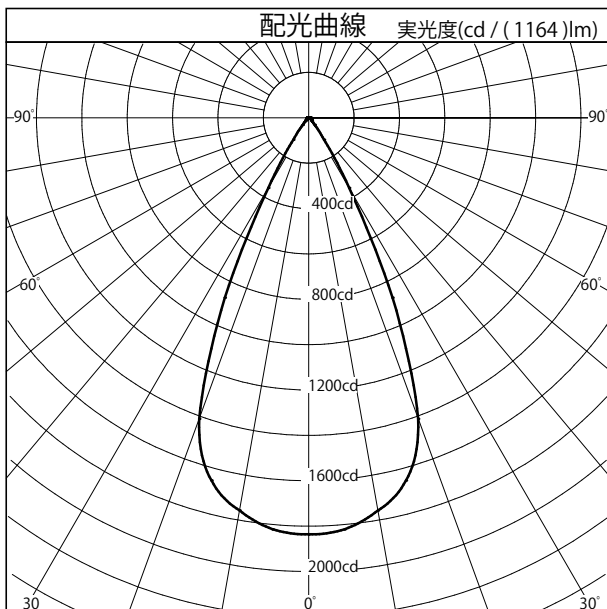

照明率表		平均照度=台数×照明率×保守率×1164(光束)/(間口×奥行)											
床面反射率 (%)		20											
天井面反射率 (%)		80			60			40			20		
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.72	0.67	0.63	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.66	0.63
	0.70	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.76	0.73	0.78	0.75	0.72
	1.00	0.91	0.86	0.82	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80
	1.25	0.95	0.91	0.87	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84
	1.50	0.98	0.94	0.91	0.96	0.92	0.89	0.94	0.91	0.88	0.92	0.89	0.87
指	2.00	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90
	2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93
	3.00	1.07	1.04	1.02	1.04	1.01	0.99	1.00	0.98	0.97	0.97	0.96	0.94
	4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.97
数	5.00	1.12	1.09	1.07	1.07	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98
	7.00	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99
	10.00	1.15	1.14	1.13	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	0.97



配光特性

図番 YL220008



カタログ番号	J579VN
使用ランプ	3000K
器具光束	1257.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.82 H
C断面	
B断面	

	角度	光度
	0°	1983
	10°	1898
	20°	1525
	30°	385
	40°	44
	50°	16
	60°	12
	70°	11
	80°	9
	90°	8
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

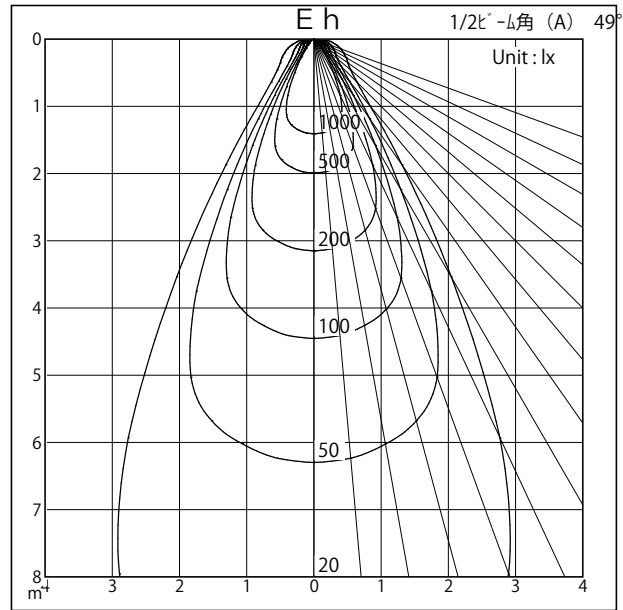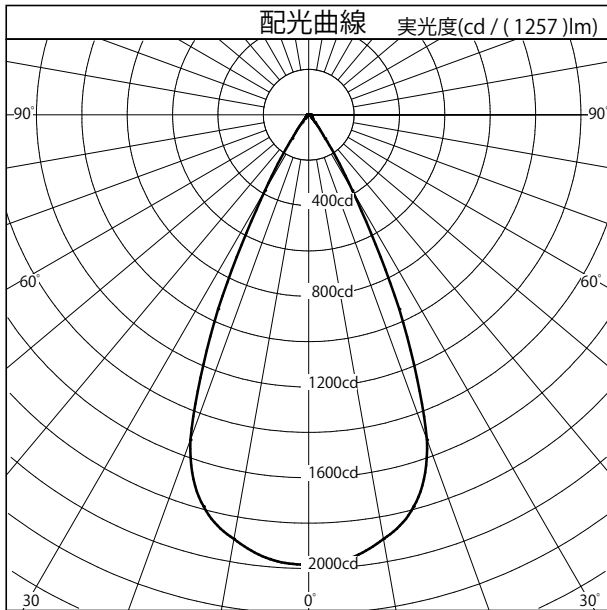

照明率表		平均照度=台数×照明率×保守率×1257(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.72	0.67	0.63	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.66	0.63	0.62
	0.70	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.76	0.73	0.78	0.75	0.72	0.71
	1.00	0.91	0.86	0.82	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.79
	1.25	0.95	0.91	0.87	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82
	1.50	0.98	0.94	0.91	0.96	0.92	0.89	0.94	0.91	0.88	0.92	0.89	0.87	0.85
指	2.00	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.88
	2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93	0.90
	3.00	1.07	1.04	1.02	1.04	1.01	0.99	1.00	0.98	0.97	0.97	0.96	0.94	0.92
	4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.97	0.94
数	5.00	1.12	1.09	1.07	1.07	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
	7.00	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.96
	10.00	1.15	1.14	1.13	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	0.97



配光特性

図番 YL220009



カタログ番号	J579VN
使用ランプ	4000K
器具光束	1362.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.82 H
C断面	
B断面	

	角度	光度
	0°	2148
	10°	2056
	20°	1652
	30°	418
	40°	48
	50°	17
	60°	13
	70°	11
	80°	9
	90°	9
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

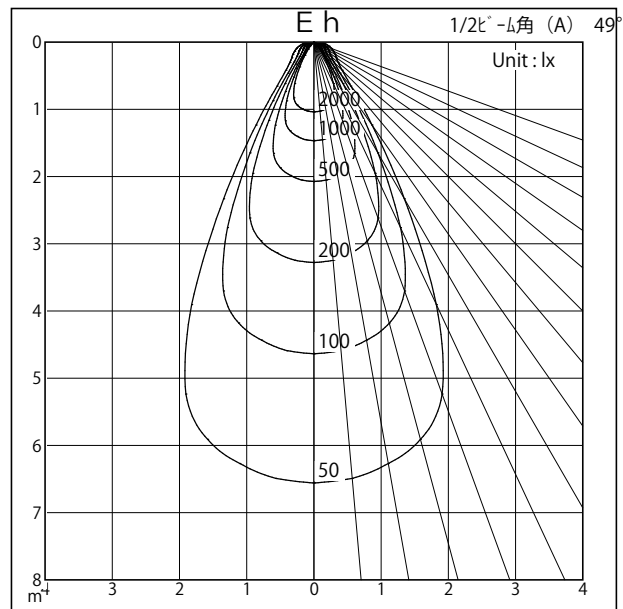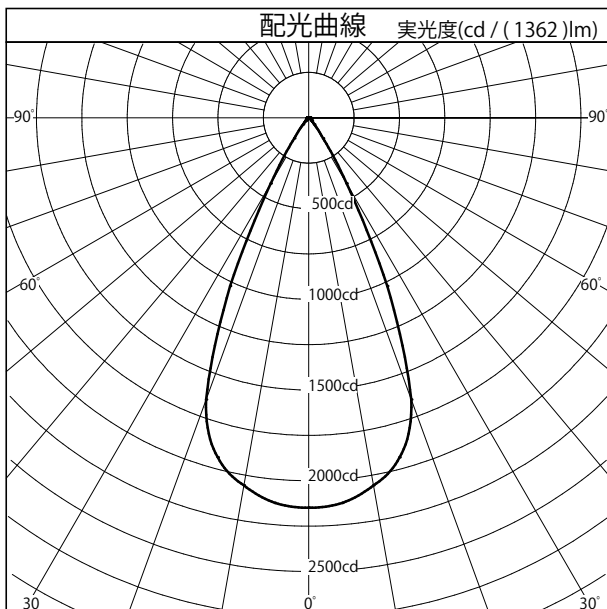

照明率表		平均照度=台数×照明率×保守率×1362(光束)/(間口×奥行)													
床面反射率 (%)		20												0	
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.72	0.67	0.63	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.66	0.63	0.62	
	0.70	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.76	0.73	0.78	0.75	0.72	0.71	
	1.00	0.91	0.86	0.82	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.79	
	1.25	0.95	0.91	0.87	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82	
	1.50	0.98	0.94	0.91	0.96	0.92	0.89	0.94	0.91	0.88	0.92	0.89	0.87	0.85	
	指	2.00	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.88
		2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93	0.90
		3.00	1.07	1.04	1.02	1.04	1.01	0.99	1.00	0.98	0.97	0.97	0.96	0.94	0.92
		4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.97	0.94
	数	5.00	1.12	1.09	1.07	1.07	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
7.00		1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.96	
	10.00	1.15	1.14	1.13	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	0.97	



配光特性

図番 YL220010



カタログ番号	J579VN
使用ランプ	5000K
器具光束	1339.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.82 H
C断面	
B断面	

	角度	光度
	0°	2112
	10°	2021
	20°	1624
	30°	410
	40°	47
	50°	17
	60°	13
	70°	11
	80°	9
	90°	8
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

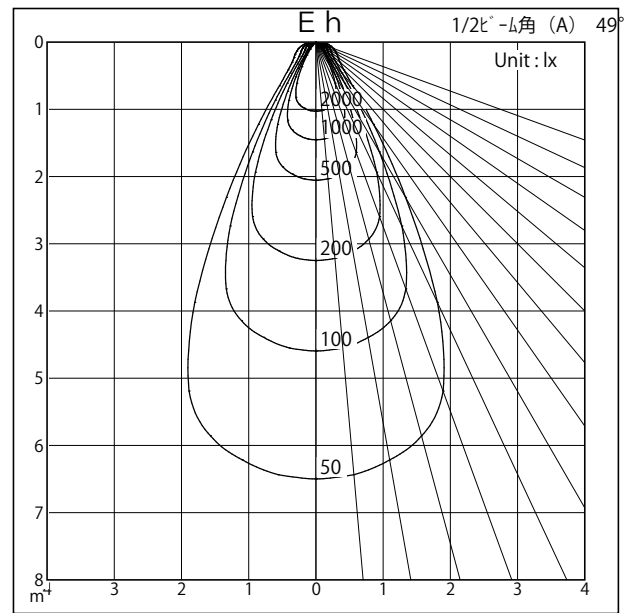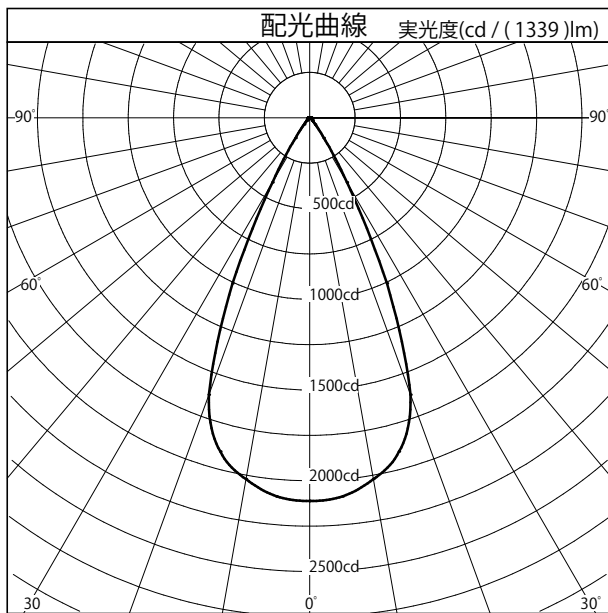

照明率表		平均照度=台数×照明率×保守率×1339(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.72	0.67	0.63	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.66	0.63	
	0.70	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.76	0.73	0.78	0.75	0.72	
	1.00	0.91	0.86	0.82	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	
	1.25	0.95	0.91	0.87	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	
	1.50	0.98	0.94	0.91	0.96	0.92	0.89	0.94	0.91	0.88	0.92	0.89	0.87	
	指	2.00	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90
		2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93
		3.00	1.07	1.04	1.02	1.04	1.01	0.99	1.00	0.98	0.97	0.97	0.96	0.94
		4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.97
	数	5.00	1.12	1.09	1.07	1.07	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98
7.00		1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	
10.00		1.15	1.14	1.13	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	