



# 配光特性

図番 YL230171

カタログ番号	YZ341(B・W)
使用ランプ	2700K
器具光束	292.0 lm <small>1.000</small>
最大光度	4209.2 cd
1 / 2 ビーム角	
A 断面	16.00° (照射角24°)
C 断面	
B 断面	



	角度	光度
	0°	4209
	10°	1567
	20°	0
	30°	0
	40°	1
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

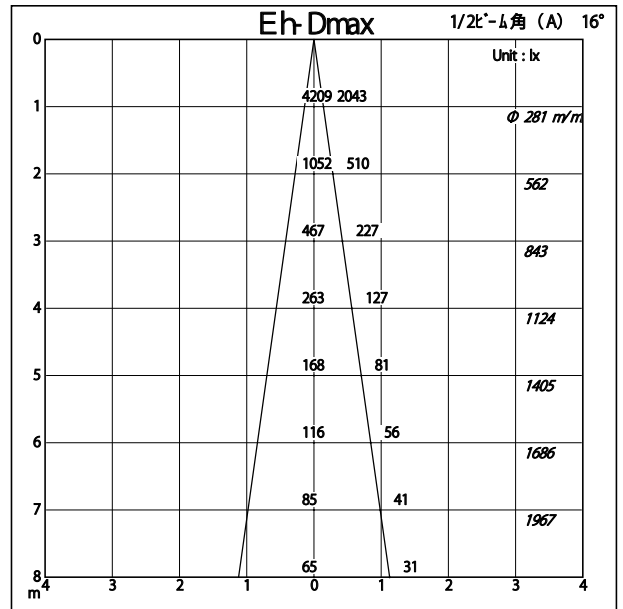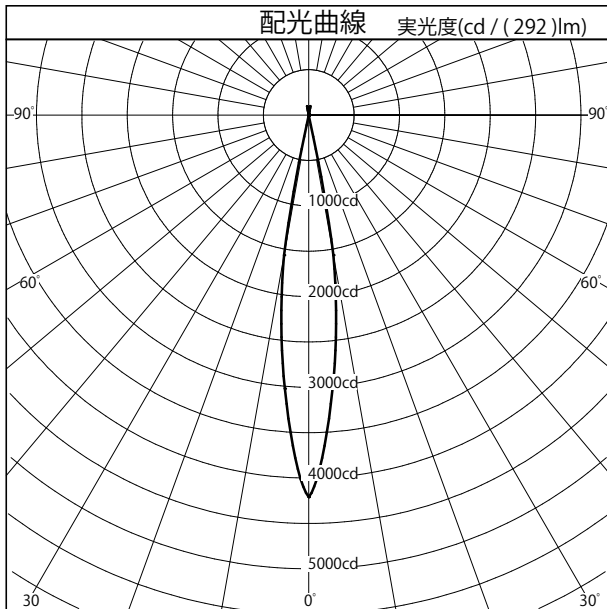

照明率表		平均照度=台数*照明率*保守率* 292 (光束)/(間口*奥行)												
床面反射率 %		20												
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	1.13	1.11	1.10	1.13	1.11	1.10	1.12	1.11	1.10	1.12	1.10	1.09	1.09
	0.70	1.15	1.13	1.11	1.14	1.12	1.11	1.13	1.11	1.10	1.12	1.11	1.10	1.09
	1.00	1.17	1.15	1.13	1.15	1.13	1.12	1.14	1.12	1.11	1.13	1.11	1.10	1.09
	1.25	1.18	1.16	1.14	1.16	1.14	1.13	1.15	1.13	1.12	1.13	1.12	1.10	1.09
	1.50	1.20	1.17	1.15	1.17	1.15	1.14	1.15	1.13	1.12	1.13	1.12	1.11	1.09
指	2.00	1.21	1.19	1.17	1.18	1.17	1.15	1.16	1.14	1.13	1.13	1.12	1.11	1.09
	2.50	1.23	1.20	1.19	1.19	1.18	1.16	1.16	1.15	1.14	1.13	1.12	1.11	1.09
	3.00	1.23	1.22	1.20	1.20	1.18	1.17	1.16	1.15	1.14	1.13	1.12	1.12	1.09
	4.00	1.25	1.23	1.22	1.21	1.19	1.18	1.17	1.16	1.15	1.13	1.13	1.12	1.09
	5.00	1.26	1.24	1.23	1.21	1.20	1.19	1.17	1.16	1.16	1.13	1.13	1.12	1.09
数	7.00	1.27	1.26	1.25	1.22	1.21	1.20	1.17	1.17	1.16	1.13	1.13	1.13	1.09
	10.00	1.28	1.27	1.26	1.22	1.22	1.21	1.18	1.17	1.17	1.13	1.13	1.13	1.09



# 配光特性

図番 YL230172

カタログ番号	YZ341(B・W)		
使用ランプ	5000K		
器具光束	340.0	lm	1.000
最大光度	4894.6	cd	
1 / 2 ビーム角			
A 断面	16.00 ° (照射角24°)		
C 断面			
B 断面			



	角度	光度
	0°	4895
	10°	1822
	20°	0
	30°	0
	40°	1
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

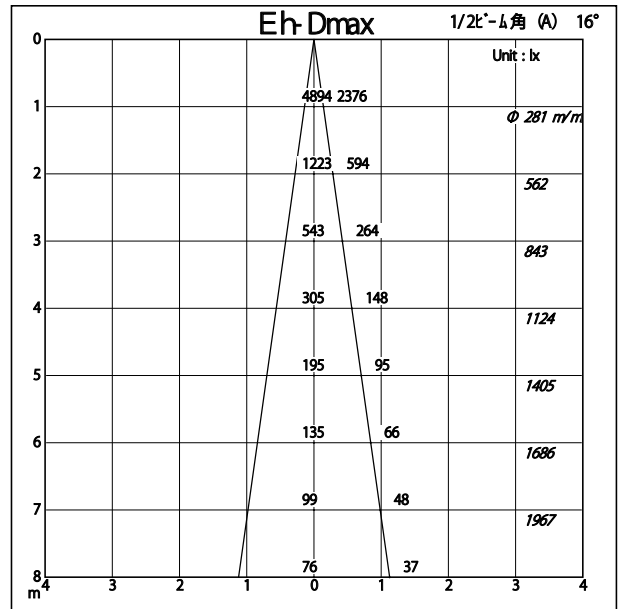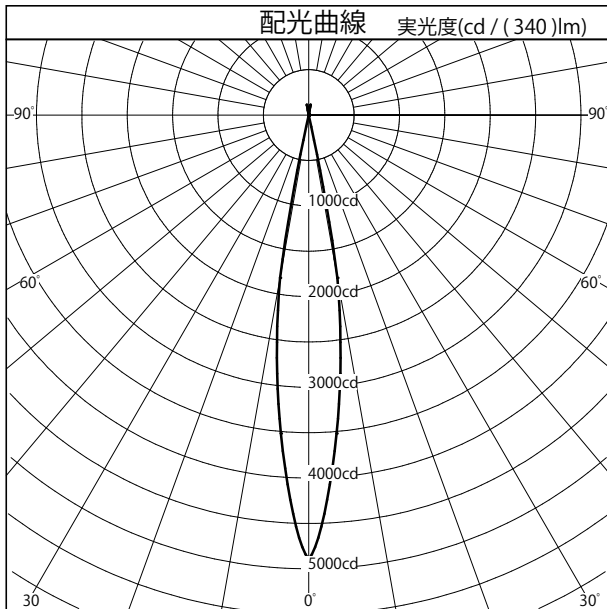

照明率表		平均照度=台数*照明率*保守率* 340 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	1.13	1.11	1.10	1.13	1.11	1.10	1.12	1.11	1.10	1.12	1.10	1.09
	0.70	1.15	1.13	1.11	1.14	1.12	1.11	1.13	1.11	1.10	1.12	1.11	1.10
	1.00	1.17	1.15	1.13	1.15	1.13	1.12	1.14	1.12	1.11	1.13	1.11	1.10
	1.25	1.18	1.16	1.14	1.16	1.14	1.13	1.15	1.13	1.12	1.13	1.11	1.10
	1.50	1.20	1.17	1.15	1.17	1.15	1.14	1.15	1.13	1.12	1.13	1.12	1.11
	2.00	1.21	1.19	1.17	1.18	1.17	1.15	1.16	1.14	1.13	1.13	1.12	1.11
	2.50	1.23	1.20	1.19	1.19	1.18	1.16	1.16	1.15	1.14	1.13	1.12	1.11
	3.00	1.23	1.22	1.20	1.20	1.18	1.17	1.16	1.15	1.14	1.13	1.12	1.12
	4.00	1.25	1.23	1.22	1.21	1.19	1.18	1.17	1.16	1.15	1.13	1.13	1.12
	5.00	1.26	1.24	1.23	1.21	1.20	1.19	1.17	1.16	1.16	1.13	1.13	1.12
指	7.00	1.27	1.26	1.25	1.22	1.21	1.20	1.17	1.17	1.16	1.13	1.13	1.13
	10.00	1.28	1.27	1.26	1.22	1.22	1.21	1.18	1.17	1.17	1.13	1.13	1.13