

Luminaire

Code M324620

Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K


Measurement

Code FTS1602825

Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K

Luminaire Flux	1727.19 lm	Luminaire Power	24.00 W	Efficacy	71.97 lm/W	Efficiency	100.00%
Lamps Flux	1727.19 lm	Maximum value	2825.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 150 mm Diam. 120 mm	Height 137 mm Height 0 mm					
Horizontal Luminous Area	0.011310 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.002736 m2
Coordinate system	CG	Symmetry Type	Maximum Gamma Angle	Measurement Flux	180	1727.19 lm	
Date	04-03-2015						
Measurement Distance	0.00						
LED Flux=2645lm LED Power=24W Eff=65,3% EfcLed=110lm/W EfcLum=72lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	97 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

Diam=150mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

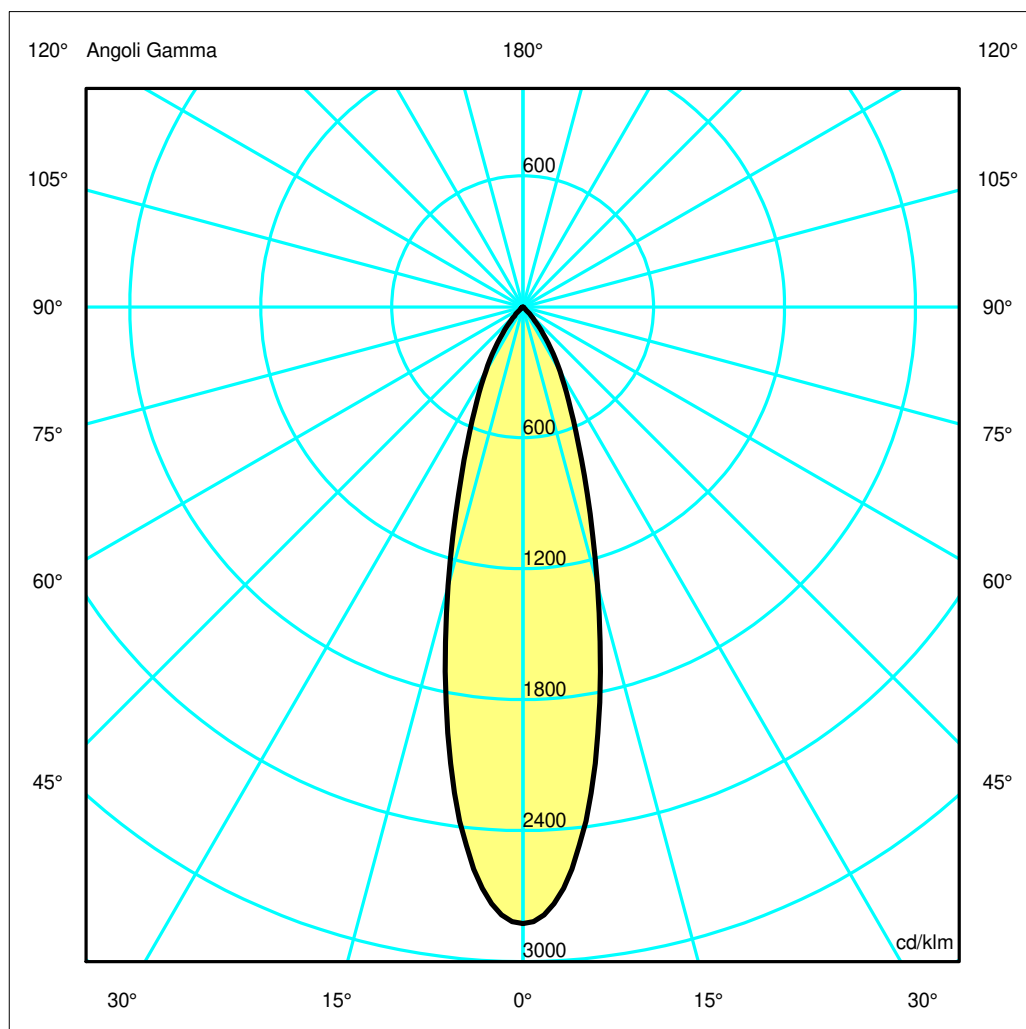

Luminaire

Code M324620

Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K

Measurement

Code FTS1602825


Name EVERYTHING 150 QUADRATO TRIM FISSO LED WIDE FLOOD CORNICE BIANCO / DEFL. NERO 2700K

Luminaire Flux	1727.19 lm	Luminaire Power	24.00 W	Efficacy	71.97 lm/W	Efficiency	100.00%
Lamps Flux	1727.19 lm	Maximum value	2825.85 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	150 mm 120 mm	Height Height	137 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.011310 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.002736 m2	
Coordinate system Date Measurement Distance		CG 04-03-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1727.19 lm	
LED Flux=2645lm LED Power=24W Eff=65,3% EfcLed=110lm/W EfcLum=72lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	97 --	100 100 100 100		D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.51	0.76	1.02	1.27	OC	0.25	0.51	0.76	1.02	1.27
OB	0.25	0.51	0.76	1.02	1.27	OD	0.25	0.51	0.76	1.02	1.27

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OB	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OC	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07
OD	4880.78	4467.44	2282.90	903.82	352.28	59.78	6.91	0.60	0.21	0.07

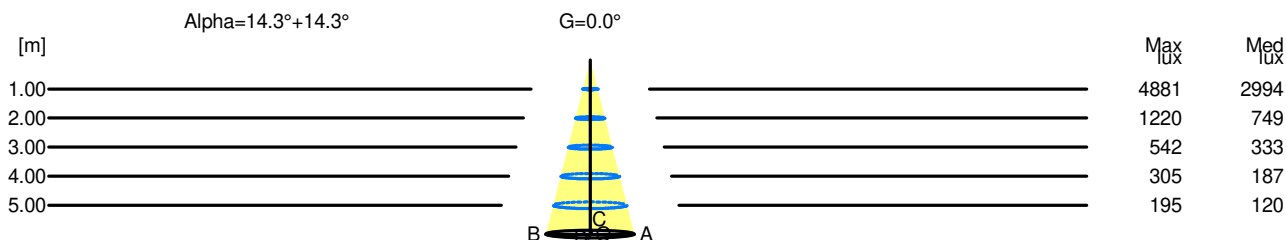

H[m]	D[m]	Max lux	Med lux	Alpha=14.3°+14.3°	G=0.0
1.00	0.51	4881	2994		
2.00	1.02	1220	749		
3.00	1.53	542	333		
4.00	2.03	305	187		
5.00	2.54	195	120		