

配光特性

図番 YL220060





カタログ番号	T4394B
使用ランプ	LED 25.2w
器具光束	1470.0 lm 1,000
最大光度	2801.5 cd
1 / 2 ビーム角	
A 断面	39.00 °
C 断面	
B 断面	

角度	光度
0°	2802
10°	2393
20°	1353
30°	564
40°	186
50°	9
60°	2
70°	1
80°	2
90°	6
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0



断面

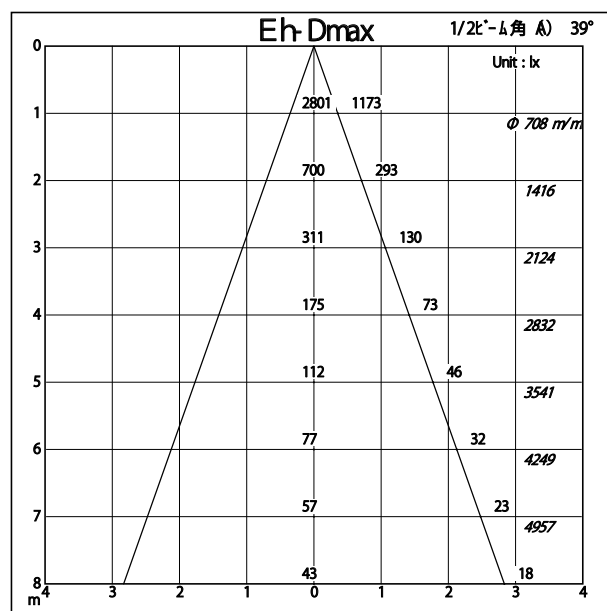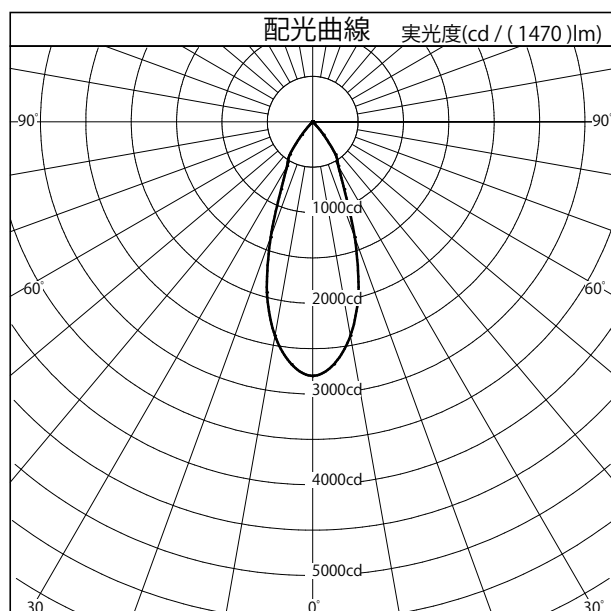

照 明 率 表		平均照度=台数*照明率*保守率* 1470 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.72	0.67	0.64	0.71	0.67	0.64	0.70	0.66	0.63	0.70	0.66	0.63	0.62
	0.70	0.82	0.77	0.74	0.81	0.77	0.74	0.80	0.76	0.73	0.79	0.75	0.73	0.71
	1.00	0.91	0.87	0.83	0.90	0.86	0.82	0.88	0.84	0.82	0.86	0.83	0.81	0.79
	1.25	0.96	0.91	0.88	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83
	1.50	0.99	0.95	0.92	0.97	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86
指	2.00	1.03	1.00	0.97	1.00	0.97	0.95	0.98	0.95	0.93	0.95	0.93	0.91	0.89
	2.50	1.06	1.03	1.00	1.03	1.00	0.98	1.00	0.98	0.96	0.97	0.95	0.94	0.91
	3.00	1.08	1.05	1.02	1.04	1.02	1.00	1.01	0.99	0.97	0.98	0.96	0.95	0.92
	4.00	1.10	1.08	1.06	1.07	1.05	1.03	1.03	1.01	1.00	1.00	0.98	0.97	0.94
数	5.00	1.12	1.10	1.08	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.99	0.95
	7.00	1.14	1.12	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.01	1.00	0.97
	10.00	1.15	1.14	1.13	1.11	1.10	1.09	1.06	1.06	1.05	1.02	1.02	1.01	0.98