

配光特性

図番 YL220056



カタログ番号	T4387B
使用ランプ	LED 46
器具光束	3225.0 lm 1,000
最大光度	72952.7 cd
1 / 2 ビーム角	
A 断面	10.00 °
C 断面	
B 断面	



角度	光度
0°	72953
10°	8715
20°	266
30°	68
40°	17
50°	5
60°	1
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0



断面

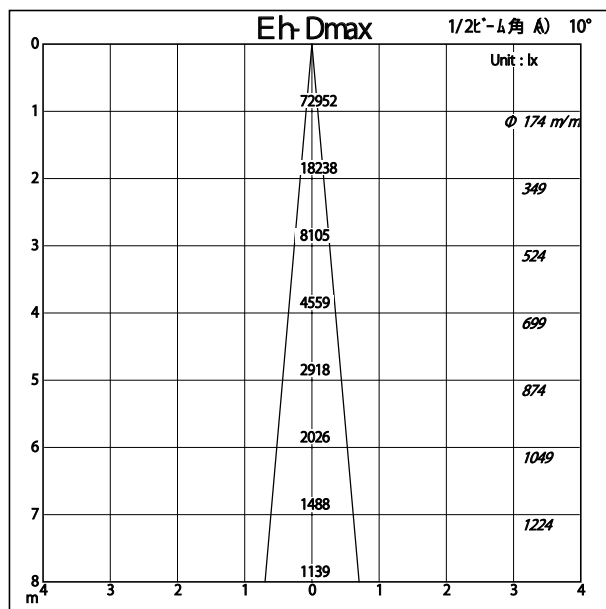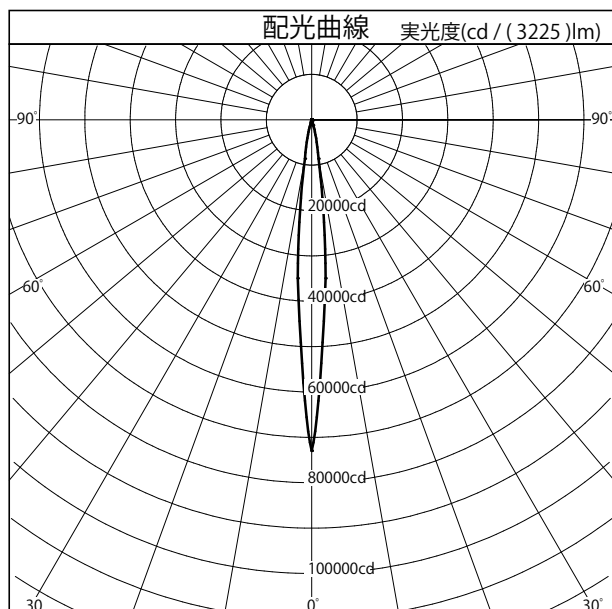

照 明 率 表		平均照度=台数*照明率*保守率* 3225 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		0											
壁面反射率 %		0											
室 指 数	0.50	1.01	0.99	0.98	1.01	0.99	0.98	1.00	0.99	0.97	1.00	0.98	0.97
	0.70	1.04	1.01	1.00	1.03	1.01	0.99	1.02	1.00	0.99	1.01	0.99	0.98
	1.00	1.06	1.04	1.02	1.05	1.02	1.01	1.03	1.01	1.00	1.02	1.00	0.99
	1.25	1.08	1.05	1.03	1.06	1.04	1.02	1.04	1.02	1.01	1.02	1.01	1.00
	1.50	1.09	1.06	1.05	1.07	1.05	1.03	1.05	1.03	1.02	1.03	1.01	1.00
	2.00	1.11	1.08	1.07	1.08	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01
	2.50	1.12	1.10	1.08	1.09	1.07	1.06	1.06	1.05	1.04	1.03	1.02	1.02
	3.00	1.13	1.11	1.09	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.03	1.02
	4.00	1.14	1.13	1.11	1.10	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.02
	5.00	1.15	1.14	1.12	1.11	1.10	1.09	1.07	1.06	1.06	1.04	1.03	1.03
数	7.00	1.16	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.03	1.03
	10.00	1.17	1.16	1.15	1.12	1.12	1.11	1.08	1.07	1.07	1.04	1.04	1.03