



# 配光特性

図番 BE\_77602K3

カタログ番号	T4522B
オプション番号	3000K
使用ランプ	LED 4.2W
器具光束	374.0 lm <small>1,000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.74 H
C断面	
B断面	



<div>BEGA</div> <div>FLOOD LIGHT</div>  <div>断面</div>	角度	光度
	0°	546
	10°	473
	20°	335
	30°	191
	40°	57
	50°	3
	60°	1
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

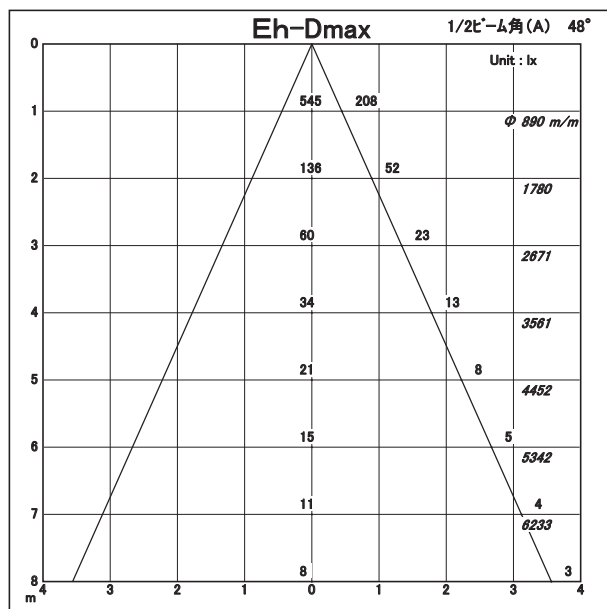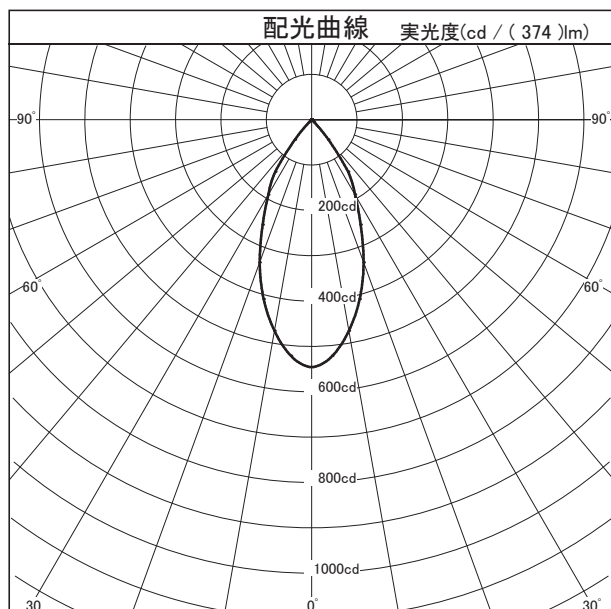



照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 374 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.68	0.62	0.59	0.67	0.62	0.59	0.66	0.62	0.58	0.65	0.61	0.58	0.57
	0.70	0.79	0.74	0.70	0.78	0.73	0.70	0.77	0.73	0.70	0.76	0.72	0.69	0.68
	1.00	0.89	0.84	0.81	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.79	0.77
	1.25	0.94	0.90	0.86	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81
	1.50	0.98	0.93	0.90	0.95	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.84
指	2.00	1.03	0.99	0.95	1.00	0.96	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.88
	2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93	0.90
	3.00	1.07	1.04	1.01	1.04	1.01	0.99	1.00	0.98	0.97	0.97	0.96	0.94	0.92
	4.00	1.10	1.08	1.05	1.06	1.04	1.02	1.03	1.01	1.00	0.99	0.98	0.97	0.94
	5.00	1.12	1.10	1.08	1.08	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
数	7.00	1.14	1.12	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.01	1.00	0.97
	10.00	1.15	1.14	1.13	1.11	1.10	1.09	1.06	1.06	1.05	1.02	1.02	1.01	0.98



# 配光特性

図番 BE\_77602K3

カタログ番号	T4502B
オプション番号	Z4205 3000K
使用ランプ	LED 4.2W
器具光束	330.0 lm <small>1,000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.73 H
C断面	0.74 H
B断面	0.75 H

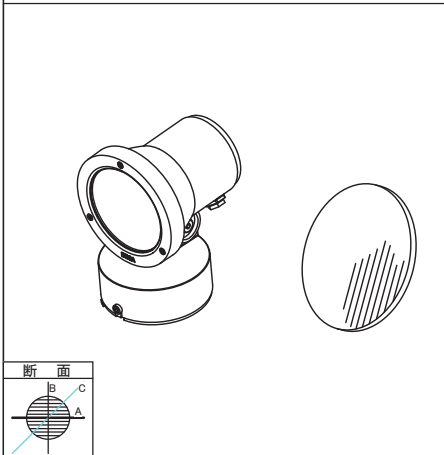

<div>BE GA</div> <div>FLOOD LIGHT</div>  <div>断面</div> 	角度	光度
	0°	436
	10°	381
	20°	265
	30°	137
	40°	34
	50°	9
	60°	5
	70°	3
	80°	1
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

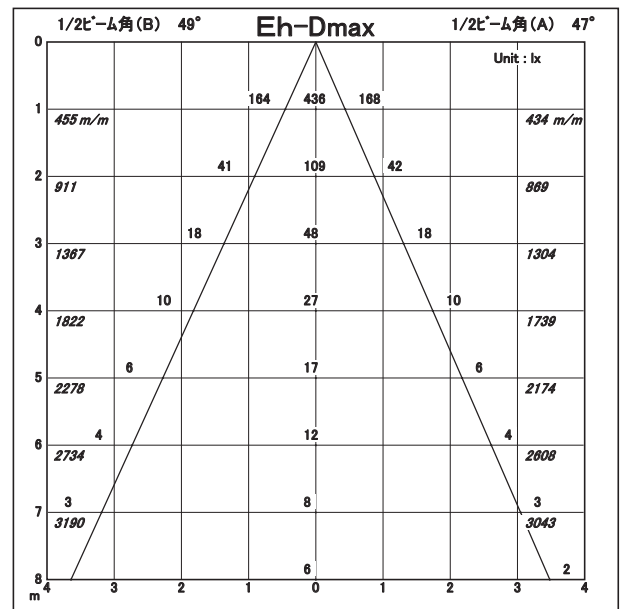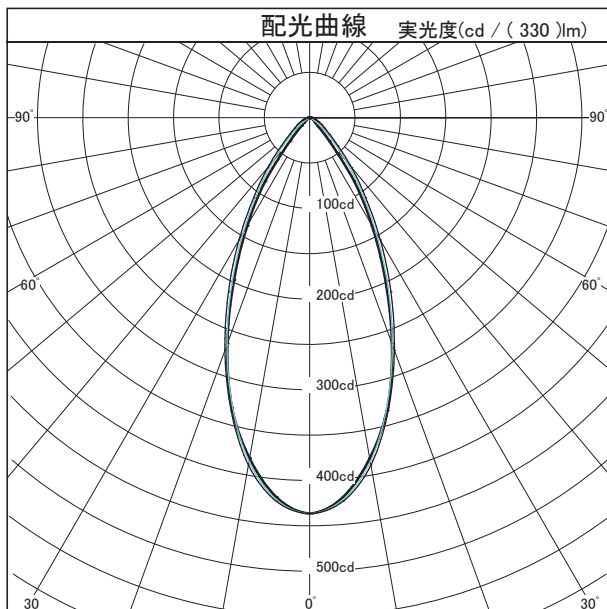



照 明 率 表		平均照度=台数*照明率*保守率* 330 (光束)/(間口*奥行)											
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.63	0.57	0.53	0.62	0.57	0.53	0.61	0.56	0.53	0.61	0.56	0.53
	0.70	0.75	0.69	0.65	0.73	0.68	0.64	0.72	0.68	0.64	0.71	0.67	0.64
	1.00	0.85	0.80	0.76	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74
	1.25	0.91	0.86	0.82	0.89	0.84	0.81	0.87	0.83	0.80	0.85	0.81	0.79
	1.50	0.95	0.90	0.86	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.82
	2.00	1.00	0.96	0.92	0.97	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87
	2.50	1.03	1.00	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90
	3.00	1.06	1.02	0.99	1.02	0.99	0.97	0.99	0.96	0.94	0.96	0.94	0.92
	4.00	1.09	1.06	1.03	1.05	1.03	1.00	1.01	0.99	0.98	0.98	0.96	0.95
	5.00	1.11	1.08	1.06	1.07	1.05	1.03	1.03	1.01	1.00	0.99	0.98	0.97
数	7.00	1.13	1.11	1.09	1.09	1.07	1.06	1.04	1.03	1.02	1.01	1.00	0.99
	10.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00


# 配光特性

図番 BE\_77602K3

カタログ番号	T4502B
オプション番号	Z4270B 3000K
使用ランプ	LED 4.2W
器具光束	277.0 lm <small>1,000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	



<b>BEGA</b> FLOOD LIGHT   	角度	光度
	0°	548
	10°	394
	20°	181
	30°	51
	40°	8
	50°	1
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

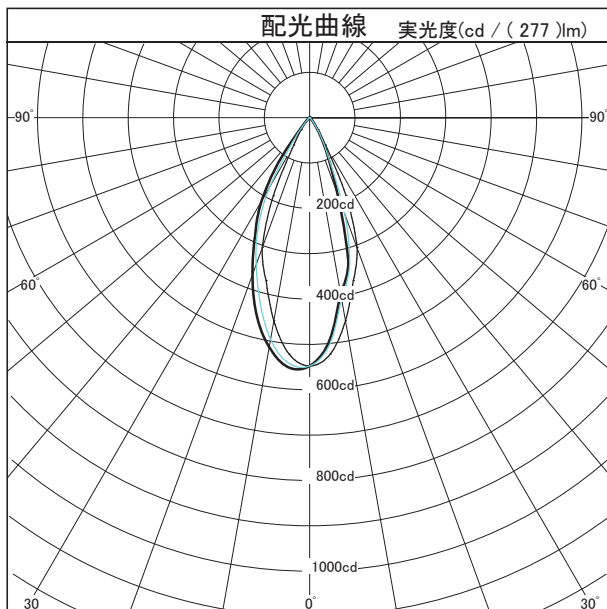

1/2°-Δ角(B) 0°	Eh-Dmax	1/2°-Δ角(A) 0°
0	547	0
1	136	0
2	60	0
3	34	0
4	21	0
5	15	0
6	11	0
7	8	0
8		

Unit : lx

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 277 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.73	0.69	0.65	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64
	0.70	0.83	0.79	0.75	0.82	0.78	0.75	0.81	0.77	0.75	0.80	0.77	0.74	0.73
	1.00	0.92	0.88	0.84	0.91	0.87	0.84	0.89	0.86	0.83	0.88	0.85	0.82	0.81
	1.25	0.97	0.92	0.89	0.95	0.91	0.88	0.93	0.90	0.87	0.91	0.88	0.86	0.84
	1.50	1.00	0.96	0.93	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.87
指	2.00	1.04	1.00	0.97	1.01	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.92	0.90
	2.50	1.07	1.03	1.01	1.03	1.01	0.99	1.00	0.98	0.96	0.98	0.96	0.94	0.92
	3.00	1.08	1.05	1.03	1.05	1.03	1.00	1.02	1.00	0.98	0.99	0.97	0.96	0.93
	4.00	1.11	1.09	1.06	1.07	1.05	1.03	1.03	1.02	1.01	1.00	0.99	0.98	0.95
	5.00	1.12	1.10	1.09	1.08	1.07	1.05	1.04	1.03	1.02	1.01	1.00	0.99	0.96
数	7.00	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	0.97
	10.00	1.16	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.02	0.98