


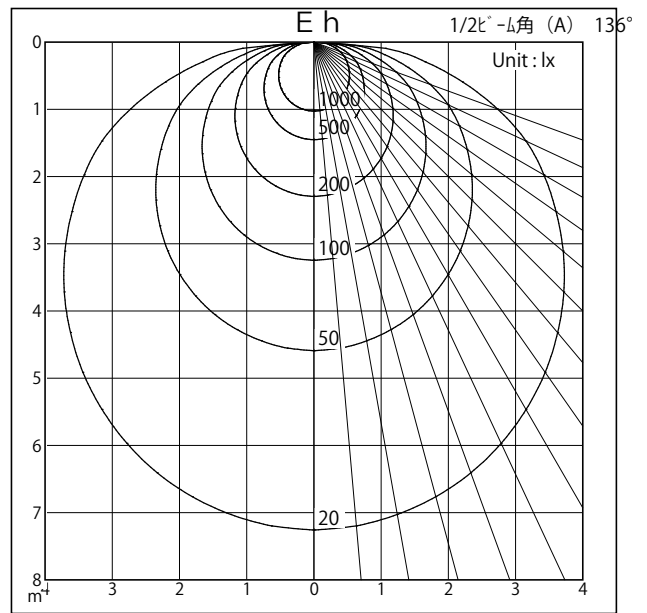
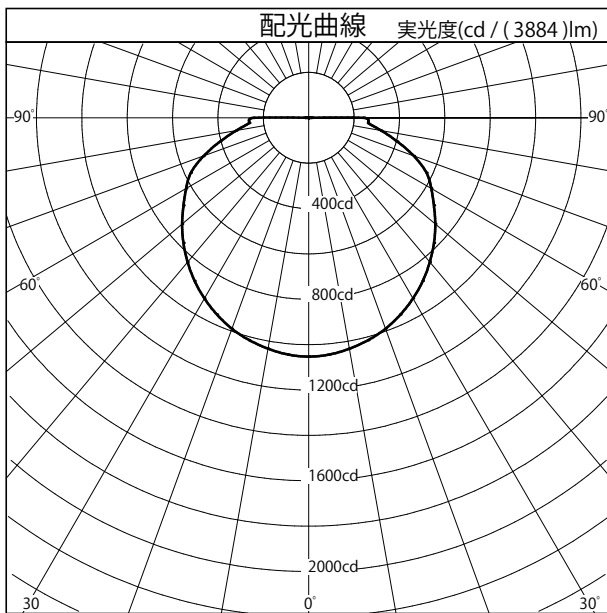
# 配光特性

図番 YL230103



カタログ番号	L1056W
使用ランプ	LED電球 x12 74.4W
器具光束	3884.0 lm <small>1,000</small>
下方効率	99.0 %
上方効率	1.0 %
最大取付間隔	
A断面	1.30 H
C断面	
B断面	

	角度	光度
	0°	1053
	10°	1034
	20°	990
	30°	919
	40°	830
	50°	728
	60°	624
	70°	494
	80°	325
	90°	242
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	



照明率表		平均照度=台数×照明率×保守率×3884(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.34	0.26	0.20	0.33	0.25	0.20	0.32	0.25	0.20	0.31	0.24	0.20	0.18
	0.70	0.46	0.36	0.30	0.44	0.35	0.29	0.42	0.34	0.29	0.41	0.34	0.28	0.26
	1.00	0.58	0.49	0.41	0.56	0.47	0.41	0.54	0.46	0.40	0.51	0.45	0.39	0.37
	1.25	0.66	0.57	0.49	0.63	0.55	0.48	0.60	0.53	0.47	0.58	0.52	0.46	0.44
	1.50	0.72	0.63	0.55	0.69	0.61	0.54	0.66	0.59	0.53	0.63	0.57	0.52	0.49
指	2.00	0.81	0.72	0.65	0.77	0.70	0.64	0.74	0.67	0.62	0.70	0.65	0.60	0.57
	2.50	0.87	0.79	0.72	0.83	0.76	0.70	0.79	0.73	0.68	0.75	0.71	0.66	0.63
	3.00	0.91	0.84	0.77	0.86	0.80	0.75	0.82	0.77	0.73	0.79	0.74	0.71	0.67
	4.00	0.97	0.91	0.85	0.92	0.87	0.82	0.88	0.83	0.80	0.84	0.80	0.77	0.73
数	5.00	1.01	0.95	0.90	0.96	0.91	0.87	0.91	0.87	0.84	0.87	0.84	0.81	0.77
	7.00	1.05	1.01	0.97	1.00	0.96	0.93	0.95	0.92	0.90	0.91	0.89	0.86	0.82
	10.00	1.09	1.06	1.03	1.04	1.01	0.98	0.99	0.96	0.94	0.94	0.92	0.91	0.86