

# 配光特性

図番 YL240089





カタログ番号	320L1060N
使用ランプ	LDF4L-HGX/7/5/2 x6
器具光束	2889.0 lm <small>1.000</small>
下方効率	99.2 %
上方効率	0.8 %
最大取付間隔	
A断面	1.18 H
C断面	
B断面	

角度	光度
0°	973
10°	782
20°	875
30°	768
40°	689
50°	562
60°	443
70°	322
80°	193
90°	82
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0



断面

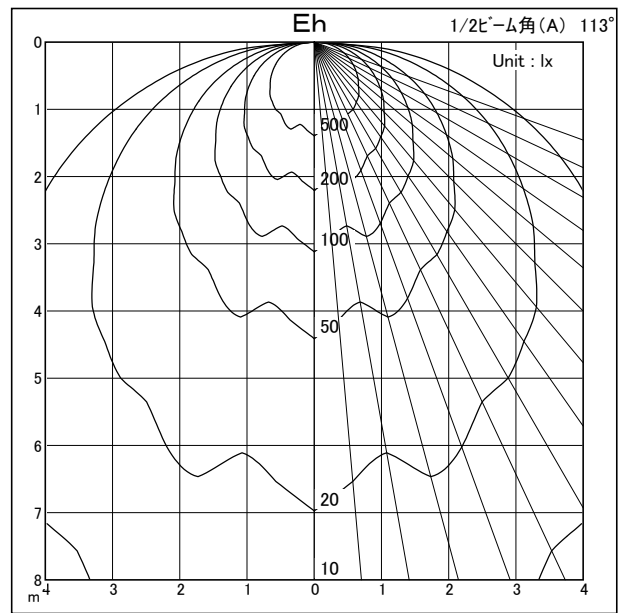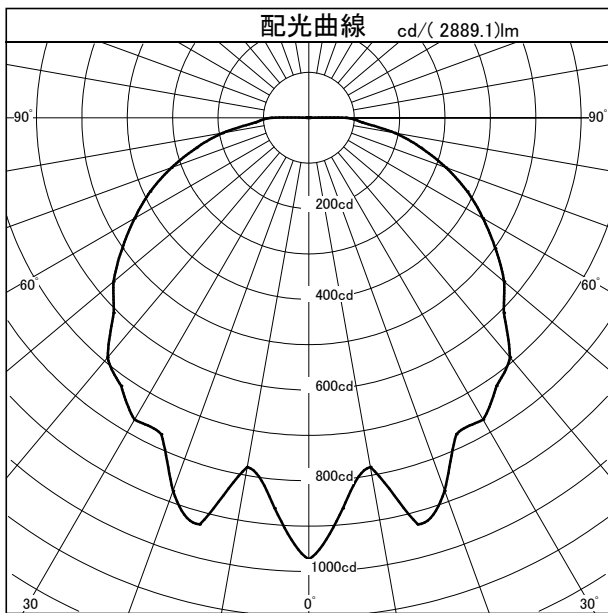

照明率表		平均照度=台数*照明率*保守率*2889(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.36	0.28	0.22	0.35	0.27	0.22	0.34	0.27	0.22	0.33	0.27	0.22	0.20
	0.70	0.48	0.39	0.32	0.46	0.38	0.32	0.45	0.37	0.32	0.43	0.36	0.31	0.29
	1.00	0.61	0.52	0.45	0.59	0.50	0.44	0.56	0.49	0.44	0.54	0.48	0.43	0.41
	1.25	0.69	0.60	0.53	0.66	0.58	0.52	0.63	0.57	0.51	0.61	0.55	0.50	0.48
	1.50	0.75	0.66	0.59	0.72	0.64	0.58	0.69	0.62	0.57	0.66	0.61	0.56	0.53
指	2.00	0.83	0.75	0.69	0.80	0.73	0.67	0.76	0.71	0.66	0.73	0.68	0.64	0.61
	2.50	0.89	0.82	0.76	0.85	0.79	0.74	0.81	0.76	0.72	0.78	0.74	0.70	0.67
	3.00	0.93	0.86	0.81	0.89	0.83	0.78	0.85	0.80	0.76	0.81	0.78	0.74	0.71
	4.00	0.98	0.93	0.88	0.94	0.89	0.85	0.90	0.86	0.83	0.86	0.83	0.80	0.77
	5.00	1.02	0.97	0.93	0.97	0.93	0.90	0.93	0.90	0.87	0.89	0.87	0.84	0.81
数	7.00	1.06	1.03	0.99	1.01	0.98	0.95	0.97	0.94	0.92	0.93	0.91	0.89	0.85
	10.00	1.10	1.07	1.04	1.05	1.02	1.00	1.00	0.98	0.96	0.96	0.94	0.93	0.89