



配光特性

図番 YL250008



カタログ番号	K4641B
使用ランプ	932 lm
器具光束	932.0 lm 1,000
下方効率	50.0 %
上方効率	50.0 %
最大取付間隔	下方向 上方向
A断面	
C断面	
B断面	

角度	光度
0°	1093
10°	370
20°	69
30°	18
40°	11
50°	9
60°	7
70°	4
80°	1
90°	0
100°	1
110°	4
120°	7
130°	9
140°	11
150°	18
160°	69
170°	370
180°	1093

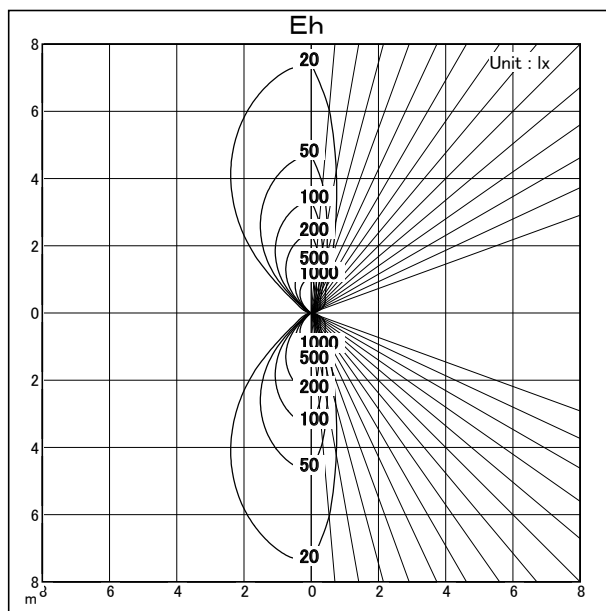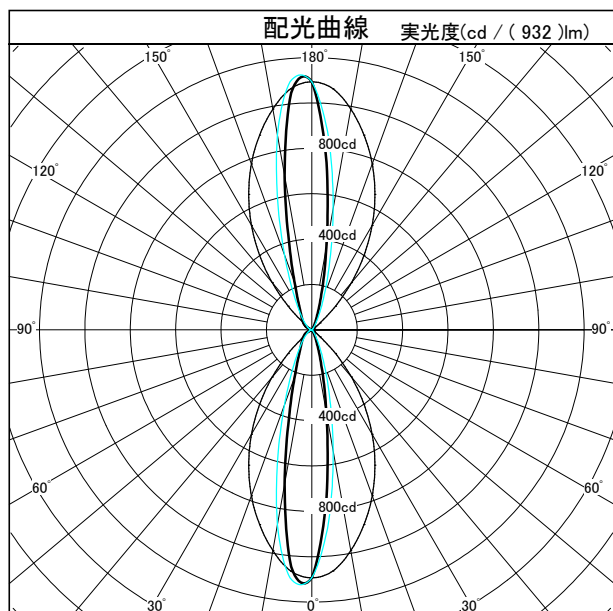

照 明 率 表													
平均照度=台数×照明率×保守率×932(光束)/(間口×奥行)													
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室 指 数	0.50	0.48	0.42	0.38	0.44	0.39	0.36	0.40	0.36	0.34	0.36	0.33	0.31
	0.70	0.58	0.52	0.48	0.53	0.48	0.44	0.47	0.43	0.41	0.42	0.39	0.37
	1.00	0.69	0.62	0.58	0.61	0.56	0.53	0.54	0.50	0.48	0.47	0.45	0.43
	1.25	0.74	0.68	0.64	0.66	0.61	0.58	0.57	0.54	0.52	0.50	0.48	0.46
	1.50	0.79	0.73	0.68	0.69	0.65	0.61	0.60	0.57	0.55	0.52	0.50	0.48
	2.00	0.85	0.79	0.75	0.74	0.70	0.67	0.63	0.61	0.59	0.54	0.53	0.51
	2.50	0.88	0.84	0.80	0.77	0.73	0.71	0.66	0.64	0.62	0.56	0.54	0.53
	3.00	0.91	0.87	0.83	0.79	0.76	0.73	0.67	0.65	0.64	0.57	0.55	0.54
	4.00	0.95	0.91	0.88	0.82	0.79	0.77	0.69	0.68	0.66	0.58	0.57	0.56
	5.00	0.97	0.94	0.91	0.83	0.81	0.79	0.71	0.69	0.68	0.59	0.58	0.57
数	7.00	1.00	0.97	0.95	0.85	0.84	0.82	0.72	0.71	0.70	0.60	0.59	0.59
	10.00	1.02	1.00	0.99	0.87	0.86	0.85	0.73	0.73	0.72	0.61	0.60	0.60