




# 配光特性

図番 YL250003

|        |                               |
|--------|-------------------------------|
| カタログ番号 | H4293B                        |
| 使用ランプ  | LED 14.5W                     |
| 器具光束   | 758.0 lm <small>1.000</small> |
| 下方効率   | 99.6 %                        |
| 上方効率   | 0.0 %                         |
| 最大取付間隔 |                               |
| A断面    |                               |
| C断面    |                               |
| B断面    |                               |



| 角度   | 光度  |
|------|-----|
| 0°   | 60  |
| 10°  | 65  |
| 20°  | 67  |
| 30°  | 66  |
| 40°  | 77  |
| 50°  | 107 |
| 60°  | 141 |
| 70°  | 171 |
| 80°  | 206 |
| 90°  | 4   |
| 100° | 0   |
| 110° | 0   |
| 120° | 0   |
| 130° | 0   |
| 140° | 0   |
| 150° | 0   |
| 160° | 0   |
| 170° | 0   |
| 180° | 0   |

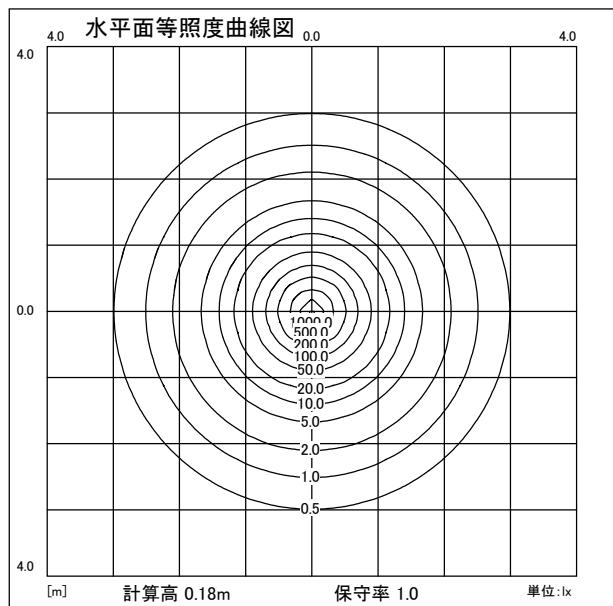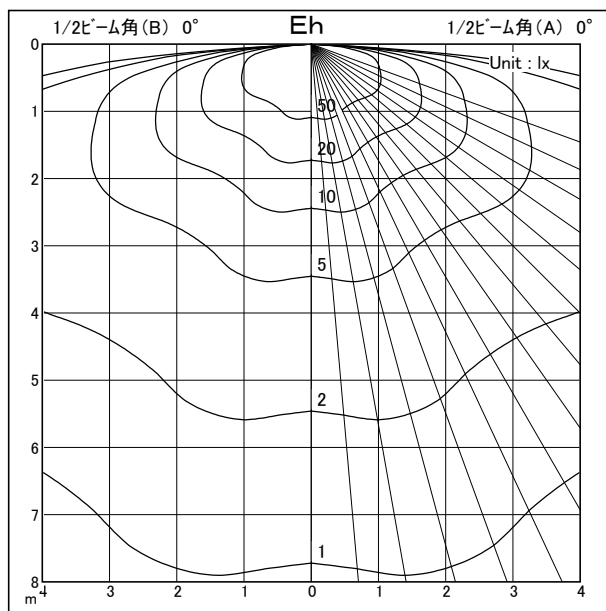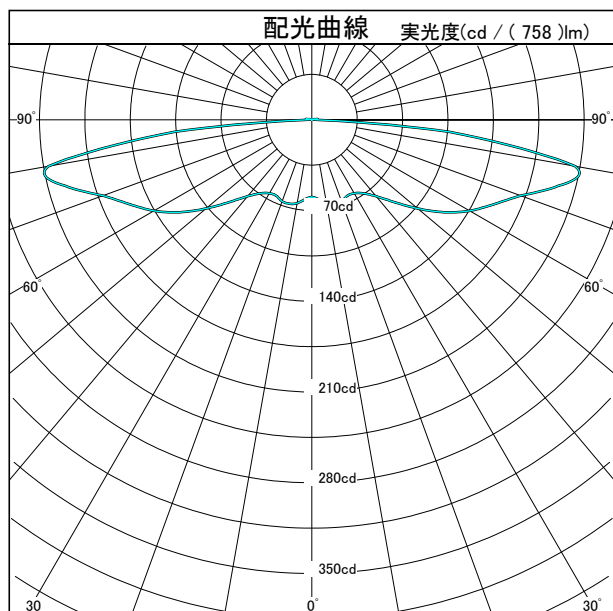

TL LABORATORY INC.