
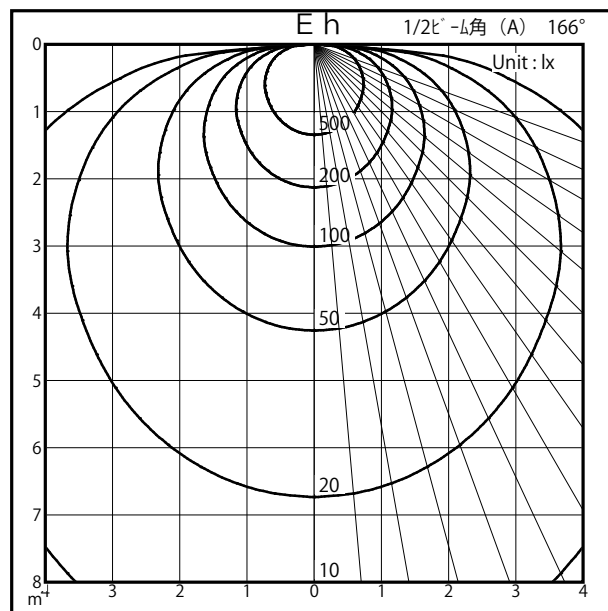
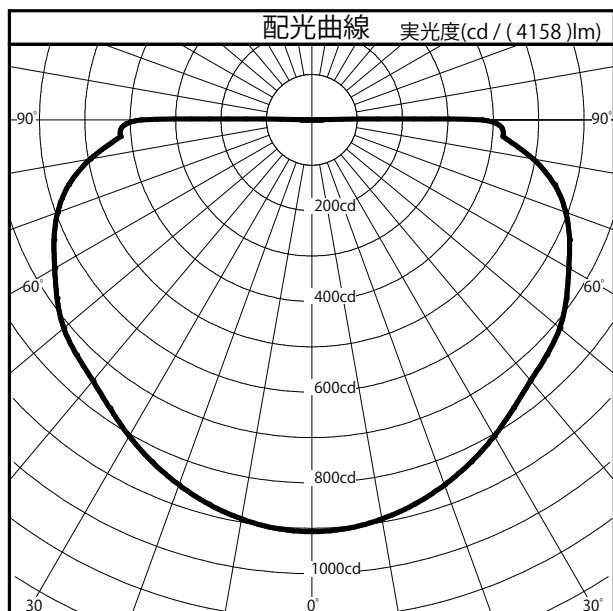


配光特性

図番 YL250047

商品番号	71LK-02B2-ZK
カタログ番号	320L1065K+320X-232
商品名	TWILIGHT
色温度	6200 K
2700K=50%, 6200K=100%,6500K=100%	
器具光束	4158.0 lm 1,000
下方効率	97.5 %
上方効率	2.5 %
最大取付間隔	
A 断面	1.33 H
C 断面	
B 断面	

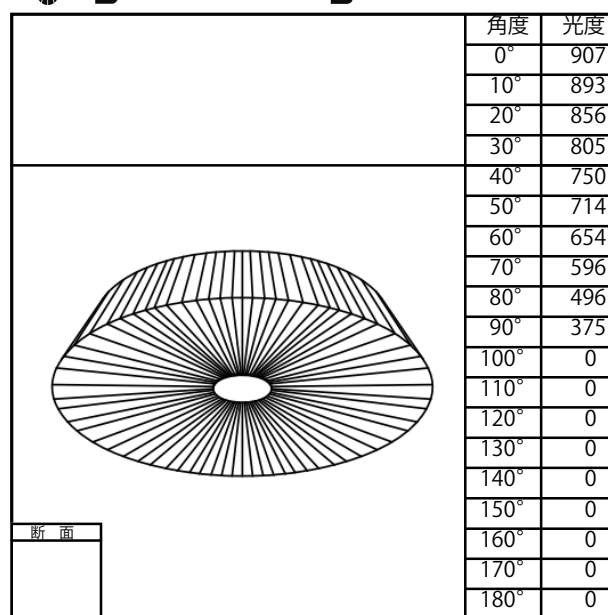

照 明 率 表		平均照度=台数×照明率×保守率×4158(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.32	0.23	0.17	0.30	0.22	0.17	0.29	0.22	0.17	0.28	0.21	0.17	0.14
	0.70	0.42	0.32	0.25	0.40	0.31	0.25	0.38	0.30	0.24	0.37	0.29	0.24	0.22
	1.00	0.54	0.44	0.36	0.51	0.42	0.35	0.49	0.41	0.35	0.46	0.39	0.34	0.31
	1.25	0.61	0.51	0.43	0.58	0.49	0.42	0.55	0.48	0.41	0.53	0.46	0.40	0.37
	1.50	0.67	0.57	0.49	0.64	0.55	0.48	0.60	0.53	0.47	0.57	0.51	0.46	0.43
	2.00	0.76	0.66	0.59	0.72	0.64	0.57	0.68	0.61	0.55	0.65	0.59	0.54	0.51
	2.50	0.82	0.73	0.66	0.77	0.70	0.64	0.73	0.67	0.62	0.70	0.64	0.60	0.56
	3.00	0.86	0.78	0.71	0.81	0.75	0.69	0.77	0.71	0.66	0.73	0.69	0.64	0.61
	4.00	0.92	0.85	0.79	0.87	0.82	0.76	0.83	0.78	0.74	0.79	0.75	0.71	0.67
	5.00	0.96	0.90	0.85	0.91	0.86	0.81	0.86	0.82	0.78	0.82	0.79	0.75	0.71
7.00	1.01	0.96	0.92	0.96	0.92	0.88	0.91	0.88	0.85	0.87	0.84	0.81	0.77	
10.00	1.06	1.02	0.98	1.00	0.97	0.94	0.95	0.92	0.90	0.90	0.88	0.86	0.82	