




# 配光特性

図番 YL250025



|        |                                |
|--------|--------------------------------|
| カタログ番号 | K4642B                         |
| 使用ランプ  | LED 35W                        |
| 器具光束   | 4312.0 lm <small>1,000</small> |
| 下方効率   | 100.0 %                        |
| 上方効率   | 0.0 %                          |
| 最大取付間隔 |                                |
| A断面    |                                |
| C断面    |                                |
| B断面    |                                |

| 角度   | 光度   |
|------|------|
|      |      |
| 0°   | 1847 |
| 10°  | 2464 |
| 20°  | 2903 |
| 30°  | 3725 |
| 40°  | 3936 |
| 50°  | 3122 |
| 60°  | 1692 |
| 70°  | 485  |
| 80°  | 92   |
| 90°  | 0    |
| 100° | 0    |
| 110° | 0    |
| 120° | 0    |
| 130° | 0    |
| 140° | 0    |
| 150° | 0    |
| 160° | 0    |
| 170° | 0    |
| 180° | 0    |

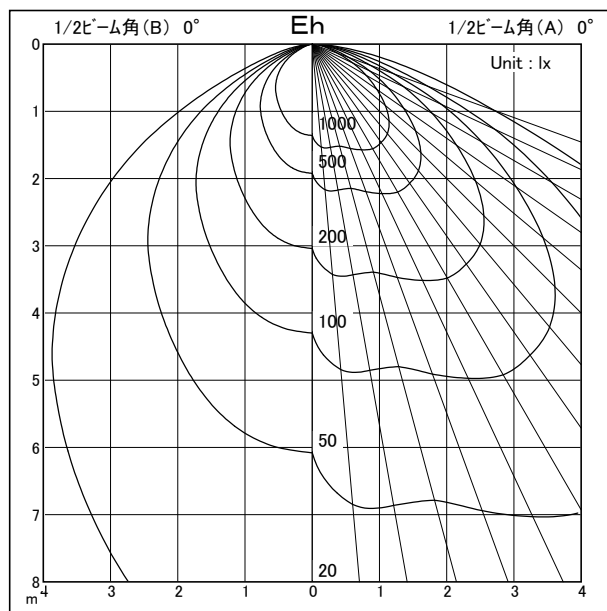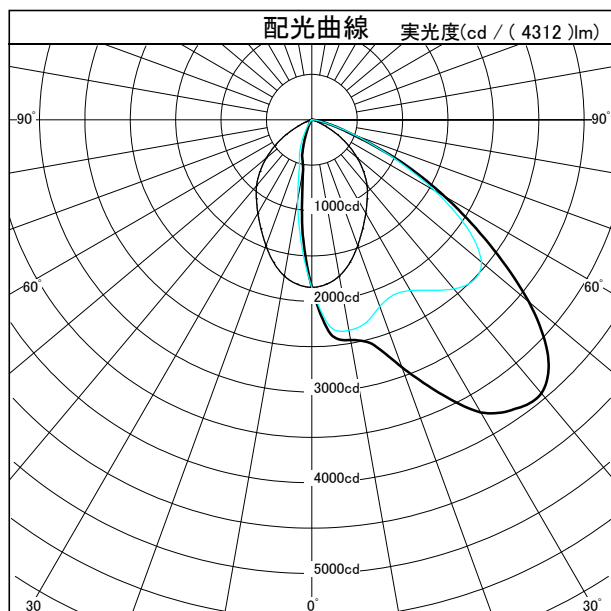

| 照 明 率 表   |       | 平均照度=台数 * 照明率 * 保守率 * 4312 (光束)/(間口 * 奥行) |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------|-------|-------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| 床面反射率(%)  |       | 20                                        |      |      |      |      |      |      |      |      |      |      |      | 0    |
| 天井面反射率(%) |       | 80                                        |      |      | 60   |      |      | 40   |      |      | 20   |      |      | 0    |
| 壁面反射率(%)  |       | 50                                        | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   | 50   | 30   | 10   | 0    |
| 室         | 0.50  | 0.39                                      | 0.31 | 0.26 | 0.38 | 0.31 | 0.26 | 0.37 | 0.31 | 0.26 | 0.36 | 0.30 | 0.26 | 0.24 |
|           | 0.70  | 0.53                                      | 0.44 | 0.38 | 0.51 | 0.43 | 0.38 | 0.50 | 0.43 | 0.38 | 0.48 | 0.42 | 0.37 | 0.35 |
|           | 1.00  | 0.67                                      | 0.59 | 0.53 | 0.65 | 0.58 | 0.52 | 0.63 | 0.57 | 0.52 | 0.61 | 0.56 | 0.51 | 0.49 |
|           | 1.25  | 0.76                                      | 0.68 | 0.62 | 0.73 | 0.66 | 0.61 | 0.71 | 0.65 | 0.60 | 0.69 | 0.64 | 0.59 | 0.57 |
|           | 1.50  | 0.82                                      | 0.74 | 0.69 | 0.79 | 0.73 | 0.67 | 0.76 | 0.71 | 0.66 | 0.74 | 0.69 | 0.65 | 0.63 |
| 指         | 2.00  | 0.90                                      | 0.84 | 0.78 | 0.87 | 0.81 | 0.77 | 0.84 | 0.79 | 0.75 | 0.81 | 0.77 | 0.74 | 0.71 |
|           | 2.50  | 0.95                                      | 0.90 | 0.85 | 0.92 | 0.87 | 0.83 | 0.88 | 0.84 | 0.81 | 0.85 | 0.82 | 0.79 | 0.76 |
|           | 3.00  | 0.99                                      | 0.94 | 0.89 | 0.95 | 0.91 | 0.87 | 0.91 | 0.88 | 0.85 | 0.88 | 0.85 | 0.83 | 0.80 |
|           | 4.00  | 1.04                                      | 0.99 | 0.96 | 1.00 | 0.96 | 0.93 | 0.96 | 0.93 | 0.90 | 0.92 | 0.90 | 0.88 | 0.85 |
|           | 5.00  | 1.07                                      | 1.03 | 1.00 | 1.02 | 0.99 | 0.97 | 0.98 | 0.96 | 0.94 | 0.95 | 0.93 | 0.91 | 0.88 |
| 数         | 7.00  | 1.10                                      | 1.07 | 1.05 | 1.05 | 1.03 | 1.01 | 1.01 | 0.99 | 0.98 | 0.97 | 0.96 | 0.95 | 0.91 |
|           | 10.00 | 1.13                                      | 1.11 | 1.09 | 1.08 | 1.06 | 1.05 | 1.03 | 1.02 | 1.01 | 0.99 | 0.98 | 0.97 | 0.94 |