



配光特性

図番 YL250026



カタログ番号	K4643B
使用ランプ	LED 23W
器具光束	2646.0 lm 1,000
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	1192
10°	1798
20°	2320
30°	2495
40°	2548
50°	1857
60°	1029
70°	341
80°	61
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

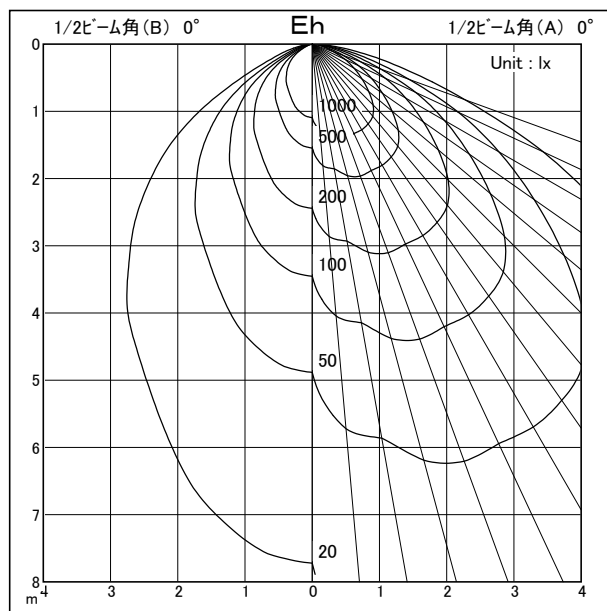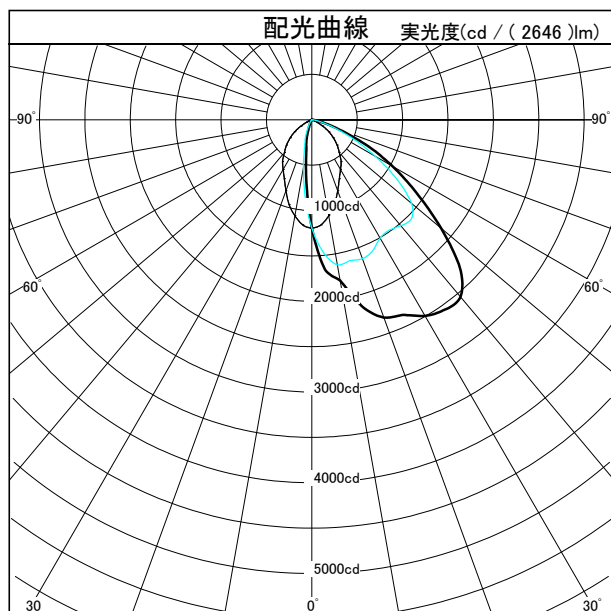

照 明 率 表		平均照度=台数×照明率×保守率×2646(光束)/(間口×奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80												0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.41	0.33	0.28	0.40	0.33	0.28	0.39	0.32	0.28	0.38	0.32	0.27	0.26
	0.70	0.54	0.46	0.40	0.53	0.45	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37
	1.00	0.69	0.61	0.55	0.67	0.60	0.54	0.65	0.58	0.54	0.63	0.57	0.53	0.51
	1.25	0.77	0.69	0.63	0.74	0.68	0.63	0.72	0.66	0.62	0.70	0.65	0.61	0.59
	1.50	0.83	0.76	0.70	0.80	0.74	0.69	0.78	0.72	0.68	0.75	0.71	0.67	0.64
	2.00	0.91	0.85	0.79	0.88	0.82	0.78	0.85	0.80	0.76	0.82	0.78	0.75	0.72
	2.50	0.96	0.90	0.86	0.92	0.88	0.84	0.89	0.85	0.82	0.86	0.83	0.80	0.77
	3.00	0.99	0.94	0.90	0.96	0.91	0.88	0.92	0.89	0.85	0.89	0.86	0.83	0.80
	4.00	1.04	1.00	0.96	1.00	0.97	0.94	0.96	0.93	0.91	0.93	0.90	0.88	0.85
	5.00	1.07	1.03	1.00	1.03	1.00	0.97	0.99	0.96	0.94	0.95	0.93	0.91	0.88
数	7.00	1.10	1.08	1.05	1.06	1.04	1.01	1.01	1.00	0.98	0.98	0.96	0.95	0.91
	10.00	1.13	1.11	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.99	0.98	0.94