



配光特性

図番 YL250027



カタログ番号	K4644B
使用ランプ	LED 19W
器具光束	2277.0 lm 1,000
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	614
10°	684
20°	704
30°	759
40°	722
50°	479
60°	261
70°	124
80°	39
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

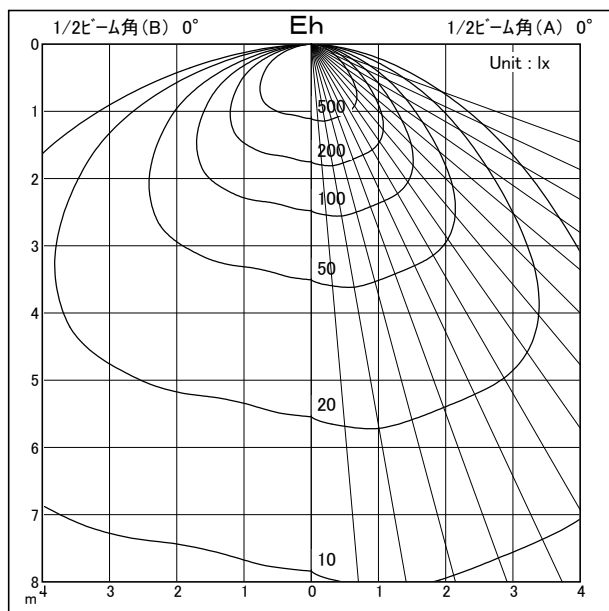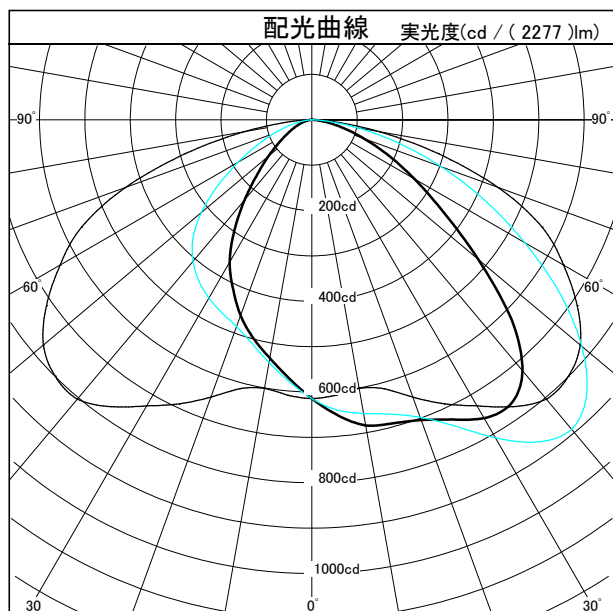

照 明 率 表		平均照度=台数×照明率×保守率×2277(光束)/(間口×奥行)											
床面反射率(%)		20											
天井面反射率(%)		0											
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室 指 数	0.50	0.36	0.27	0.22	0.35	0.27	0.22	0.34	0.26	0.22	0.33	0.26	0.21
	0.70	0.48	0.39	0.33	0.47	0.38	0.33	0.45	0.38	0.32	0.44	0.37	0.32
	1.00	0.62	0.53	0.47	0.60	0.52	0.46	0.58	0.51	0.46	0.56	0.50	0.45
	1.25	0.71	0.62	0.55	0.68	0.60	0.55	0.66	0.59	0.54	0.63	0.58	0.53
	1.50	0.77	0.69	0.62	0.74	0.67	0.61	0.71	0.65	0.60	0.69	0.64	0.59
	2.00	0.86	0.78	0.72	0.82	0.76	0.71	0.79	0.74	0.69	0.76	0.72	0.68
	2.50	0.92	0.85	0.79	0.88	0.82	0.78	0.85	0.80	0.76	0.81	0.78	0.74
	3.00	0.96	0.90	0.84	0.92	0.87	0.82	0.88	0.84	0.80	0.85	0.81	0.78
	4.00	1.01	0.96	0.92	0.97	0.93	0.89	0.93	0.90	0.87	0.89	0.87	0.84
	5.00	1.04	1.00	0.97	1.00	0.97	0.93	0.96	0.93	0.91	0.92	0.90	0.88
数	7.00	1.08	1.05	1.02	1.04	1.01	0.99	0.99	0.97	0.95	0.96	0.94	0.92
	10.00	1.12	1.09	1.07	1.07	1.05	1.03	1.02	1.01	0.99	0.98	0.97	0.96