



配光特性

図番 YL250028



カタログ番号	K4645B
使用ランプ	LED 19.3W
器具光束	2131.0 lm 1,000
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	604
10°	870
20°	931
30°	1155
40°	1456
50°	1557
60°	1225
70°	603
80°	168
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

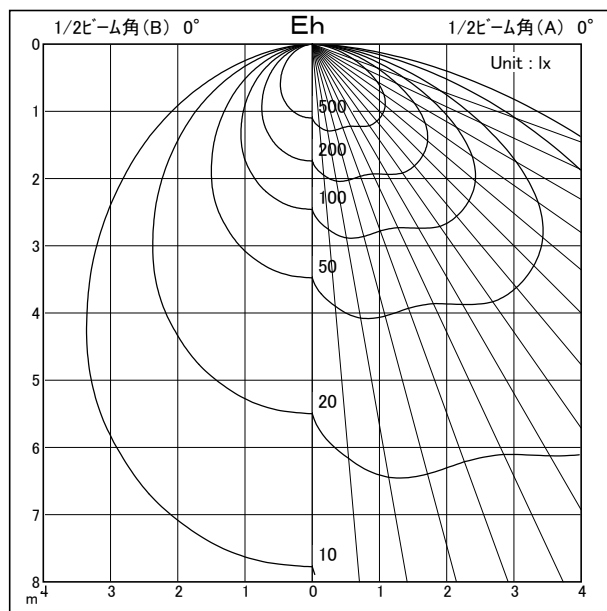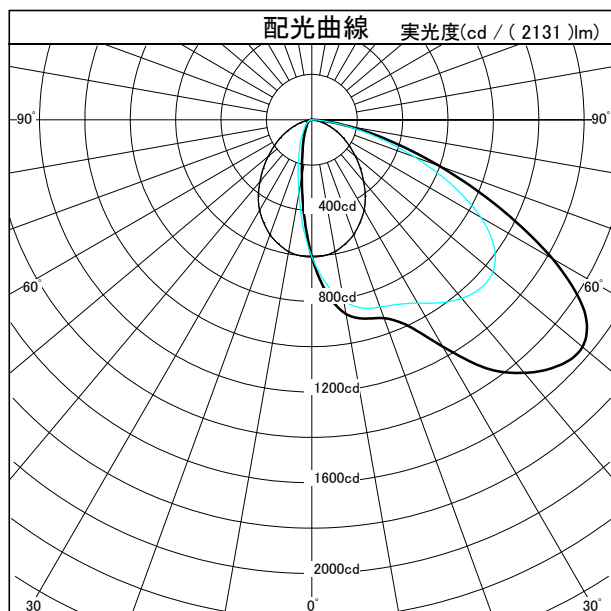

照 明 率 表		平均照度=台数 * 照明率 * 保守率 * 2131 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.35	0.26	0.21	0.34	0.26	0.20	0.32	0.25	0.20	0.32	0.25	0.20	0.18
	0.70	0.47	0.37	0.31	0.45	0.37	0.31	0.44	0.36	0.31	0.42	0.35	0.30	0.28
	1.00	0.61	0.52	0.45	0.59	0.51	0.44	0.57	0.49	0.44	0.55	0.48	0.43	0.41
	1.25	0.70	0.61	0.54	0.67	0.59	0.53	0.65	0.58	0.52	0.62	0.56	0.52	0.49
	1.50	0.76	0.68	0.61	0.73	0.66	0.60	0.70	0.64	0.59	0.68	0.62	0.58	0.55
指	2.00	0.85	0.78	0.71	0.82	0.75	0.70	0.79	0.73	0.68	0.76	0.71	0.67	0.64
	2.50	0.91	0.84	0.79	0.87	0.82	0.77	0.84	0.79	0.75	0.81	0.77	0.73	0.70
	3.00	0.95	0.89	0.84	0.91	0.86	0.82	0.88	0.83	0.80	0.84	0.81	0.78	0.74
	4.00	1.01	0.96	0.91	0.97	0.92	0.89	0.93	0.89	0.86	0.89	0.86	0.84	0.80
	5.00	1.04	1.00	0.96	1.00	0.96	0.93	0.96	0.93	0.90	0.92	0.90	0.87	0.84
数	7.00	1.08	1.05	1.02	1.04	1.01	0.98	0.99	0.97	0.95	0.95	0.94	0.92	0.88
	10.00	1.11	1.09	1.07	1.07	1.05	1.03	1.02	1.00	0.99	0.98	0.97	0.95	0.92