



配光特性

図番 YL230216



カタログ番号	K4647B
	3000K Ra80
使用ランプ	LED 1.9W
器具光束	177.0 lm 1,000
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	94
10°	100
20°	102
30°	98
40°	87
50°	64
60°	18
70°	1
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

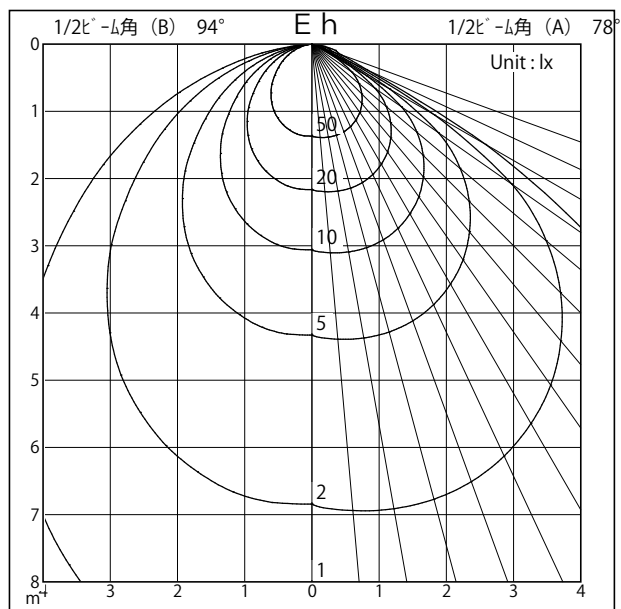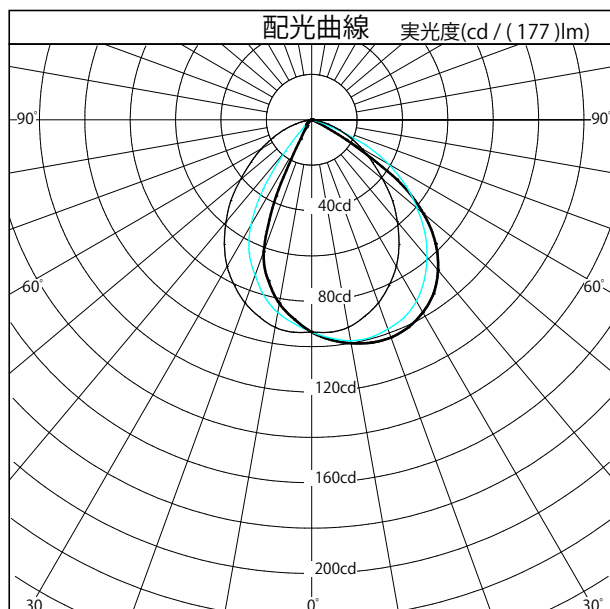

照 明 率 表		平均照度=台数×照明率×保守率×177(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80												0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室 指 数	0.50	0.46	0.39	0.34	0.45	0.38	0.34	0.44	0.38	0.33	0.43	0.37	0.33	0.32
	0.70	0.60	0.52	0.46	0.58	0.51	0.46	0.57	0.50	0.46	0.55	0.50	0.45	0.43
	1.00	0.74	0.66	0.60	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.56
	1.25	0.81	0.74	0.69	0.79	0.73	0.68	0.77	0.71	0.67	0.74	0.70	0.66	0.64
	1.50	0.87	0.80	0.75	0.84	0.78	0.74	0.82	0.77	0.73	0.79	0.75	0.71	0.69
	2.00	0.94	0.88	0.84	0.91	0.86	0.82	0.88	0.84	0.80	0.85	0.82	0.79	0.76
	2.50	0.99	0.94	0.89	0.95	0.91	0.87	0.92	0.89	0.85	0.89	0.86	0.84	0.81
	3.00	1.02	0.97	0.93	0.98	0.94	0.91	0.95	0.92	0.89	0.92	0.89	0.87	0.84
	4.00	1.06	1.03	0.99	1.02	0.99	0.96	0.99	0.96	0.94	0.95	0.93	0.91	0.88
	5.00	1.09	1.06	1.03	1.05	1.02	1.00	1.01	0.99	0.97	0.97	0.95	0.94	0.90
数	7.00	1.12	1.10	1.07	1.08	1.06	1.04	1.03	1.02	1.00	0.99	0.98	0.97	0.93
	10.00	1.15	1.13	1.11	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.96