




配光特性

図番 YL260011

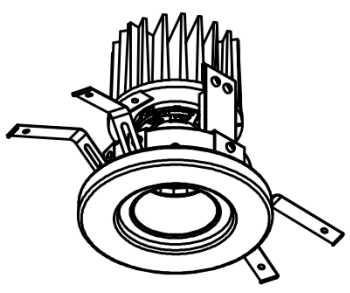

商品番号	60JK-34B0-1W	
カタログ番号	J603BW	
商品名	ACCESSORY DOWNLIGHT	
器具光束	1540.0	lm _{1.000}
下方効率	99.4 %	
上方効率	0.6 %	
最大取付間隔		
A 断面	0.58 H	
C 断面		
B 断面		

 <p>断面</p>	角度	光度
	0°	3456
	10°	2875
	20°	1339
	30°	323
	40°	96
	50°	64
	60°	47
	70°	36
	80°	29
	90°	33
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

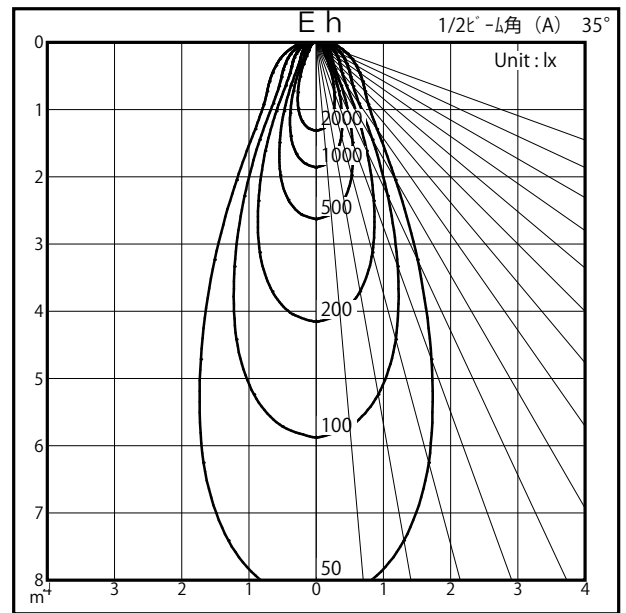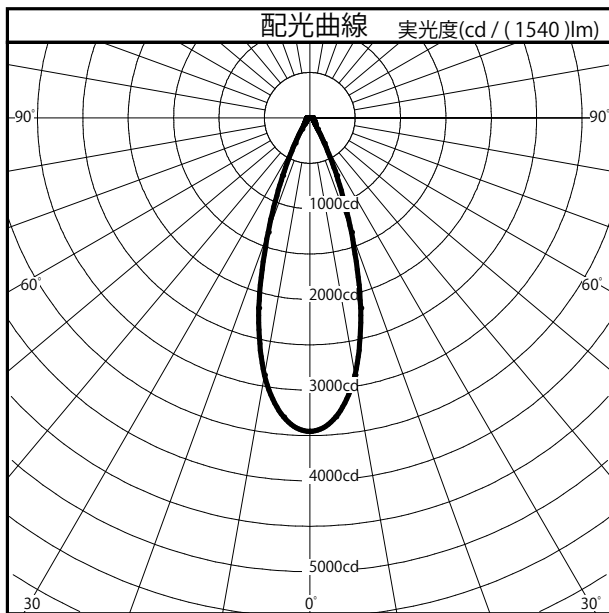

照明率表		平均照度=台数*照明率*保守率*1540(光束)/(間口*奥行)												
		20												
床面反射率 (%)		0												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.72	0.67	0.63	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.65	0.63	0.62
	0.70	0.81	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.77	0.73	0.70	0.69
	1.00	0.89	0.84	0.80	0.87	0.83	0.79	0.85	0.81	0.78	0.84	0.80	0.78	0.76
	1.25	0.93	0.88	0.85	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.79
	1.50	0.97	0.92	0.88	0.94	0.90	0.87	0.92	0.88	0.85	0.89	0.87	0.84	0.82
指	2.00	1.01	0.97	0.93	0.98	0.95	0.91	0.95	0.92	0.90	0.93	0.90	0.88	0.86
	2.50	1.04	1.00	0.97	1.01	0.97	0.95	0.98	0.95	0.93	0.95	0.92	0.91	0.88
	3.00	1.06	1.03	1.00	1.03	1.00	0.97	0.99	0.97	0.95	0.96	0.94	0.92	0.89
	4.00	1.09	1.06	1.03	1.05	1.03	1.00	1.01	0.99	0.98	0.98	0.96	0.95	0.92
	5.00	1.11	1.08	1.06	1.07	1.05	1.03	1.03	1.01	0.99	0.99	0.98	0.96	0.93
数	7.00	1.13	1.11	1.09	1.09	1.07	1.05	1.04	1.03	1.02	1.00	0.99	0.98	0.95
	10.00	1.15	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.01	1.01	1.00	0.96