




商品番号	60JK-37B2-1F	
カタログ番号	J604BF-P	
商品名	ACCESSORY DOWNLIGHT	
器具光束	1578.0	lm <sub>1.000</sub>
下方効率	99.9 %	
上方効率	0.1 %	
最大取付間隔		
A 断面	0.54 H	
C 断面		
B 断面		

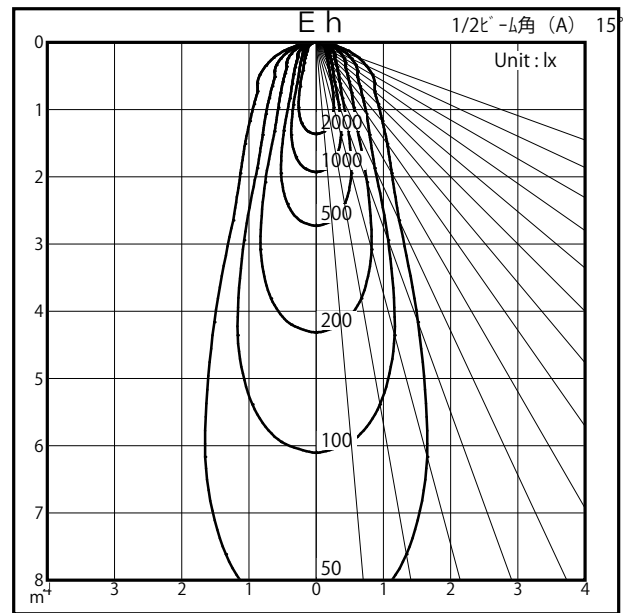

<p>X-series</p>  <p>断面</p>	角度	光度
	0°	3727
	10°	3038
	20°	1044
	30°	293
	40°	153
	50°	101
	60°	93
	70°	66
	80°	26
	90°	7
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

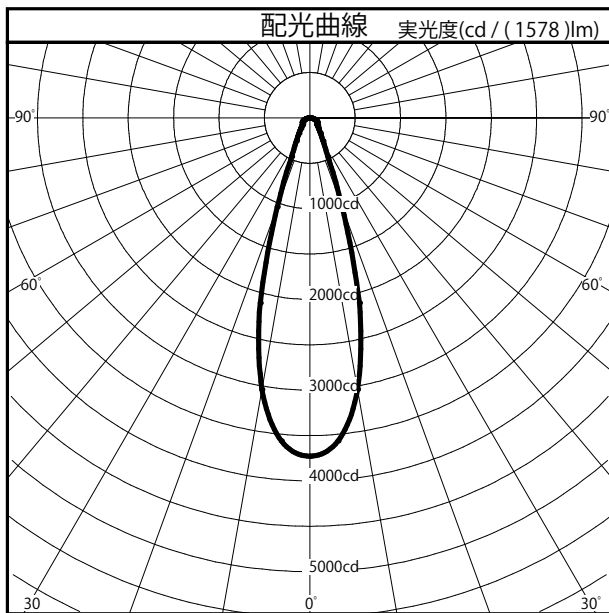

照明率表		平均照度=台数*照明率*保守率*1578(光束)/(間口*奥行)													
		20													
床面反射率 (%)		0													
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.69	0.64	0.61	0.68	0.64	0.60	0.68	0.63	0.60	0.67	0.63	0.60	0.59	
	0.70	0.78	0.72	0.68	0.77	0.72	0.68	0.75	0.71	0.68	0.74	0.70	0.67	0.66	
	1.00	0.87	0.81	0.77	0.85	0.80	0.76	0.83	0.79	0.75	0.81	0.78	0.75	0.73	
	1.25	0.91	0.86	0.82	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
	1.50	0.95	0.90	0.86	0.93	0.88	0.85	0.90	0.86	0.83	0.88	0.85	0.82	0.80	
	指	2.00	1.00	0.96	0.92	0.97	0.93	0.90	0.94	0.91	0.88	0.92	0.89	0.87	0.84
		2.50	1.04	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.87
		3.00	1.06	1.02	0.99	1.02	0.99	0.96	0.99	0.96	0.94	0.96	0.94	0.92	0.89
		4.00	1.09	1.06	1.03	1.05	1.02	1.00	1.01	0.99	0.97	0.98	0.96	0.95	0.92
		5.00	1.11	1.08	1.06	1.07	1.05	1.03	1.03	1.01	1.00	0.99	0.98	0.97	0.93
数	7.00	1.14	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.01	1.00	0.99	0.95	
	10.00	1.15	1.14	1.12	1.11	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	0.97	