



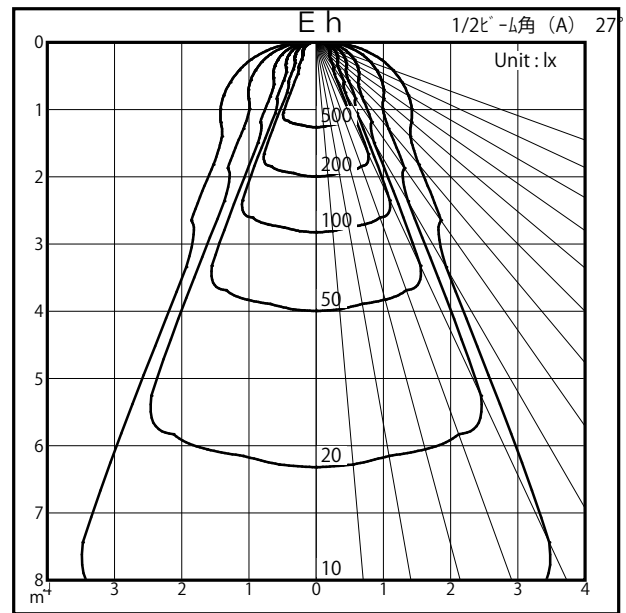

商品番号	60JK-38B1-1W	
カタログ番号	J605BW	
商品名	ACCESSORY DOWNLIGHT	
器具光束	878.0	lm _{1.000}
下方効率	99.3 %	
上方効率	0.7 %	
最大取付間隔		
A 断面	1.00 H	
C 断面		
B 断面		

	角度	光度
	0°	799
	10°	793
	20°	819
	30°	172
	40°	74
	50°	53
	60°	50
	70°	43
	80°	33
	90°	23
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

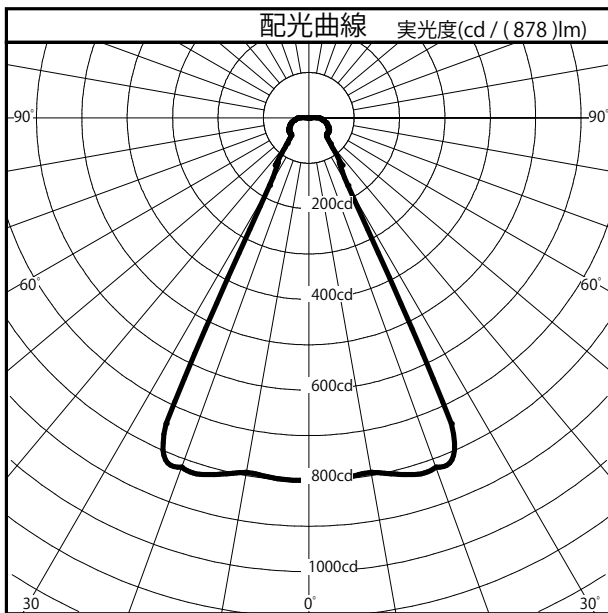

照明率表		平均照度=台数*照明率*保守率*878(光束)/(間口*奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.58	0.51	0.47	0.57	0.51	0.47	0.56	0.51	0.47	0.55	0.50	0.47	0.45
	0.70	0.68	0.62	0.57	0.67	0.61	0.57	0.66	0.60	0.56	0.64	0.60	0.56	0.54
	1.00	0.79	0.72	0.67	0.77	0.71	0.67	0.75	0.70	0.66	0.73	0.69	0.65	0.63
	1.25	0.84	0.78	0.73	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68
	1.50	0.89	0.82	0.78	0.86	0.81	0.76	0.83	0.79	0.75	0.81	0.77	0.74	0.72
指	2.00	0.94	0.89	0.84	0.91	0.86	0.83	0.88	0.84	0.81	0.85	0.82	0.79	0.77
	2.50	0.98	0.93	0.89	0.95	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80
	3.00	1.01	0.96	0.92	0.97	0.93	0.90	0.93	0.90	0.88	0.90	0.88	0.85	0.82
	4.00	1.05	1.01	0.97	1.01	0.97	0.94	0.97	0.94	0.92	0.93	0.91	0.89	0.86
	5.00	1.07	1.04	1.01	1.03	1.00	0.97	0.99	0.96	0.94	0.95	0.93	0.91	0.88
数	7.00	1.10	1.07	1.05	1.05	1.03	1.01	1.01	0.99	0.98	0.97	0.96	0.94	0.91
	10.00	1.12	1.10	1.08	1.07	1.06	1.04	1.03	1.02	1.00	0.99	0.98	0.97	0.93