



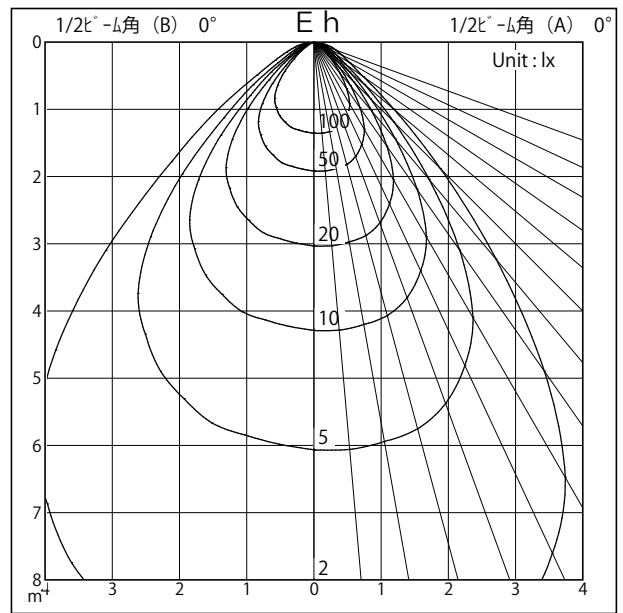

カタログ番号	K4659B
使用ランプ	LED5W
器具光束	235.0 lm _{1,000}
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

	角度	光度
	0°	184
	10°	185
	20°	174
	30°	129
	40°	46
	50°	8
	60°	2
	70°	1
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

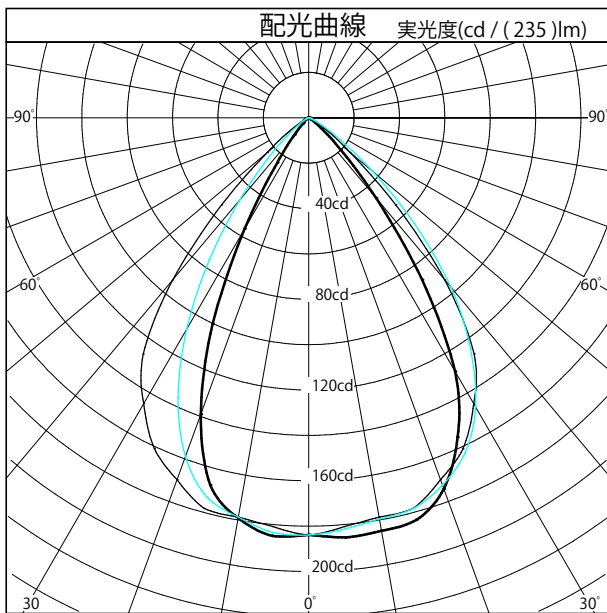

照明率表		平均照度=台数*照明率*保守率*235(光束)/(間口*奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.56	0.50	0.46	0.55	0.50	0.46	0.55	0.49	0.45	0.54	0.49	0.45	0.44
	0.70	0.70	0.64	0.59	0.69	0.63	0.59	0.68	0.62	0.59	0.66	0.62	0.58	0.57
	1.00	0.83	0.76	0.72	0.81	0.75	0.71	0.79	0.74	0.71	0.77	0.73	0.70	0.68
	1.25	0.89	0.83	0.79	0.87	0.82	0.78	0.84	0.80	0.77	0.82	0.79	0.76	0.74
	1.50	0.93	0.88	0.84	0.91	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78
指	2.00	0.99	0.94	0.91	0.96	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.83
	2.50	1.03	0.99	0.95	0.99	0.96	0.93	0.96	0.93	0.91	0.93	0.91	0.89	0.86
	3.00	1.05	1.01	0.98	1.01	0.98	0.96	0.98	0.95	0.93	0.95	0.93	0.91	0.88
	4.00	1.08	1.05	1.03	1.04	1.02	1.00	1.01	0.99	0.97	0.97	0.96	0.94	0.91
	5.00	1.10	1.08	1.06	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.97	0.96	0.93
数	7.00	1.13	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.02	1.00	0.99	0.98	0.95
	10.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.97