



配光特性

図番 YL260045



商品番号	04LK-21B1-Z0	
カタログ番号	323L1069+320X-232	
商品名	JAKOBSSON® LED CEILING LAMP	
色温度	6200 K	
	2700K=50%, 6200K=100%, 6500K=100%	
ランプ光束	3767.0	lm _{1.000}
下方効率	99.6 %	
上方効率	0.4 %	
最大取付間隔		
A 断面	1.28 H	
C 断面		
B 断面		

	角度	光度
	0°	1248
	10°	1225
	20°	1174
	30°	1076
	40°	937
	50°	770
	60°	577
	70°	375
	80°	180
	90°	55
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

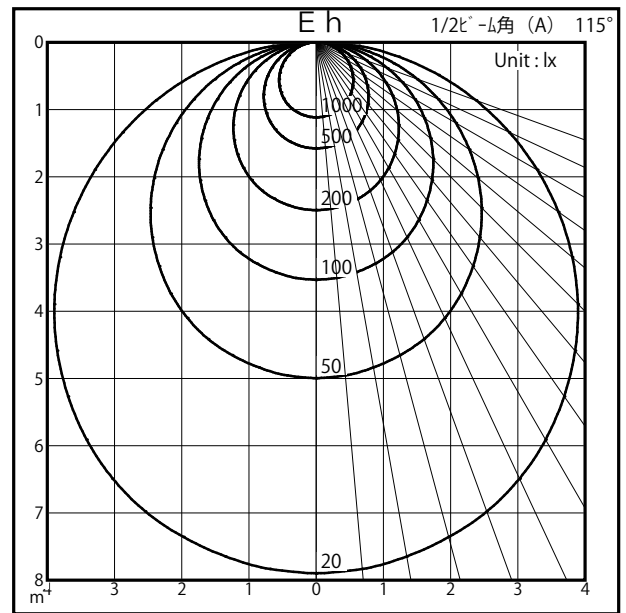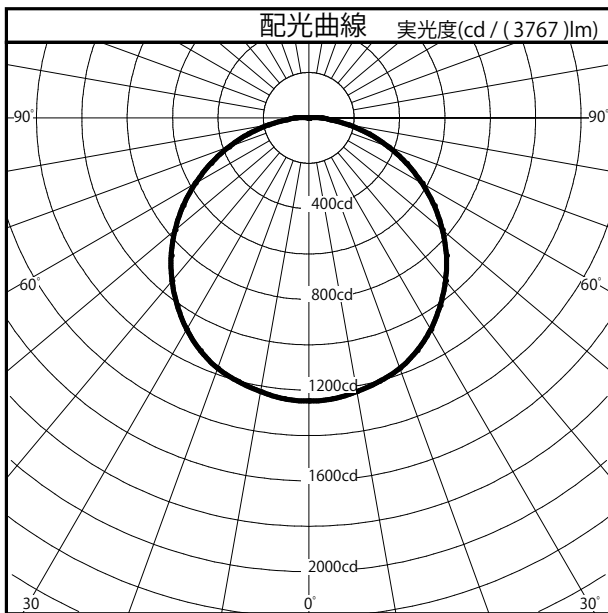

照明率表		平均照度=台数×照明率×保守率×3767(光束)/(間口×奥行)												
		20												
床面反射率 (%)		0												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.37	0.29	0.24	0.36	0.29	0.24	0.35	0.28	0.24	0.34	0.28	0.23	0.22
	0.70	0.49	0.41	0.34	0.48	0.40	0.34	0.46	0.39	0.34	0.45	0.38	0.34	0.31
	1.00	0.63	0.54	0.47	0.61	0.53	0.47	0.59	0.52	0.46	0.57	0.51	0.46	0.43
	1.25	0.71	0.62	0.56	0.68	0.61	0.55	0.66	0.59	0.54	0.63	0.58	0.53	0.51
	1.50	0.77	0.69	0.62	0.74	0.67	0.61	0.71	0.65	0.60	0.69	0.63	0.59	0.56
指	2.00	0.85	0.78	0.72	0.82	0.76	0.70	0.79	0.73	0.69	0.76	0.71	0.67	0.64
	2.50	0.91	0.84	0.79	0.87	0.81	0.77	0.84	0.79	0.75	0.80	0.77	0.73	0.70
	3.00	0.95	0.89	0.83	0.91	0.86	0.81	0.87	0.83	0.79	0.84	0.80	0.77	0.74
	4.00	1.00	0.95	0.91	0.96	0.92	0.88	0.92	0.88	0.85	0.88	0.85	0.83	0.80
	5.00	1.04	0.99	0.95	0.99	0.95	0.92	0.95	0.92	0.89	0.91	0.89	0.86	0.83
数	7.00	1.08	1.04	1.01	1.03	1.00	0.97	0.98	0.96	0.94	0.94	0.93	0.91	0.87
	10.00	1.11	1.08	1.06	1.06	1.04	1.02	1.01	1.00	0.98	0.97	0.96	0.94	0.91